

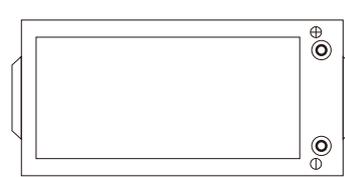


12.8V Lithium Battery

200AH(2560WH)

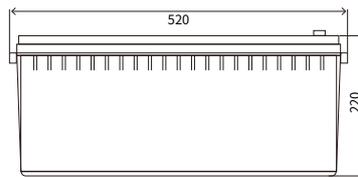

Features of LiFePO4 Battery

- The whole module is non-toxic, non-polluting and environmentally friendly;
- Cathode material is made from LiFePO₄ with safety performance and long cycle life;
- Battery management system(BMS) has protection functions including over-dis-charge, over-charge, over-current and high/low temperature;
- Small size and light weight, comfortable for installation and maintenance.

Applications of LiFePO4 Battery

- Wheelchairs and scooters;
- Solar/wind energy storage;
- Back-up power for small UPS;
- Golf trolleys & buggies.

Specification

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	200AH
	Energy	2560WH
	Internal Resistance(AC)	≤20mΩ
	Cycle Life	>6000 cycles @0.5C 80%DOD
	Months Self Discharge	<3%
	Efficiency of charge	100% @0.5C
	Efficiency of discharge	96-99% @0.5C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode	0.5C to 14.6V, then 14.6V charge current to 0.02C(CC/CV)
	Charge Current	100A
	Max. Charge Current	100A
	Charge Cut-off Voltage	14.6±0.2V
Standard Discharge	Continuous Current	100A
	Max. Pulse Current	120A(<3S)
	Discharge Cut-off Voltage	10V
Environmental	Charge Temperature	0°C to 55°C(32F to 131F) @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C(32F to 131F) @60±25% Relative Humidity
	Storage Temperature	-20°C to 60°C(32F to 131F) @60±25% Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	Metal Plate
	Approx. Dimensions	520*235*220MM
	Approx. Weight	19.8kgs
	Terminal	M8

NOTE: This 12.8V series can be used in 4 series to 51.2V, when the battery be used in 4 series, please set charge cut-off voltage to 56V, discharge cut-off voltage to 48V, max charge current to 100A, max discharge current to 100A.

Performance Characteristics

