

# KBLI48500 51,2V 50Ah



**Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.


**Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A "drop in" replacement for lead acid batteries.

**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

**Wider Storage Temperature Range:** -20 °C-60 °C.

**Superior Safety:** Prismatic Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

## Physical Dimension-mm

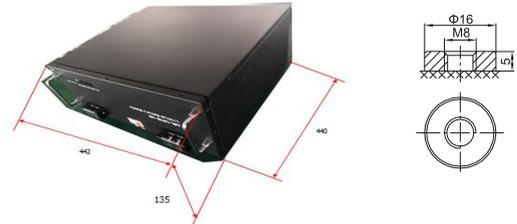

## Electrical Performance

Nominal Voltage	51.2 V
Nominal Capacity	50 Ah
Capacity @ 10A	300 min
Energy	2560 Wh
Resistance	≤50 mΩ @ 50% SOC
Self Discharge	<3% / Month
Cells	32700 Cell 3.2V 6Ah

## Charge Performance

Recommended Charge Current	10-50 A
Recommended Charge Voltage	58.4 V
Charge Cut-Off Voltage	<59.2 V (0.5 ~ 1.5 s)
Reconnect Voltage	>57.6 V
Balancing Voltage	<56 V
Protocol (optional)	RS485/RS232

## Discharge Performance

Continuous Discharge Current	25 A
Maximum continuous Discharge Current	50 A
Peak Discharge Cut-Off Current	120 A (5 ~15 ms)
Recommended Low Voltage Disconnect	40 V
Discharge Cut-Off Voltage	>38.4V (50 ~ 150 ms)
Reconnect Voltage	>40 V
Short Circuit Protection	200 ~ 800 μs

## Mechanical Performance

Dimension (L x W x H x HT)	440 x 442 x 135 x 135 mm "17.3 x 17.4 x 5.31 x 5.31 in"
Approx. Weight	29 kg
Terminal Type	M8
Terminal Torque	80 ~ 100 in-lbs (9 ~ 11 N-m)
Case Material	Metal
Enclosure Protection	IP20

## Temperature Performance





Discharge Temperature	-4 ~ 140 °F (-20 ~ 60 °C)
Charge Temperature	32 ~ 113 °F (0 ~ 45 °C)
Storage Temperature	23 ~ 95 °F (-5 ~ 35 °C)
High Temperature Cut-Off	149 °F (65 °C)
Reconnect Temperature	118 °F (48 °C)

## Compliance

Certifications	CE UN38.3 IEC62133
Shipping Classification	UN 3480, CLASS 9

(Note) The Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data.

**Performance Characteristics**

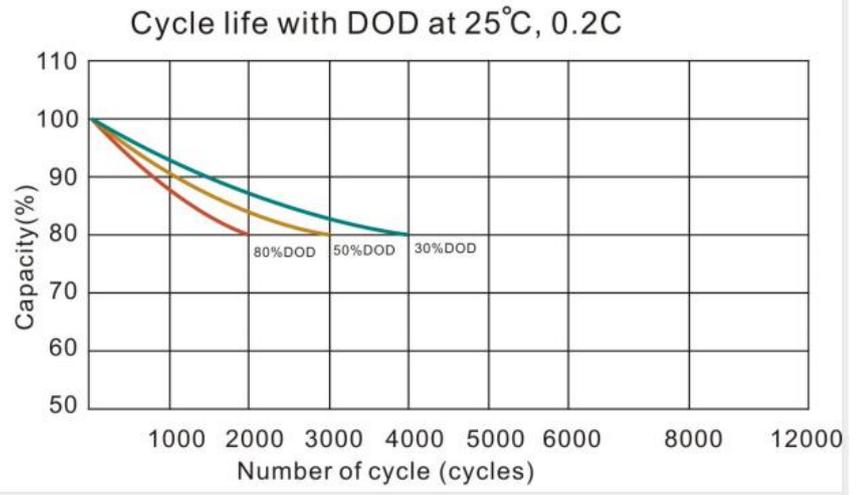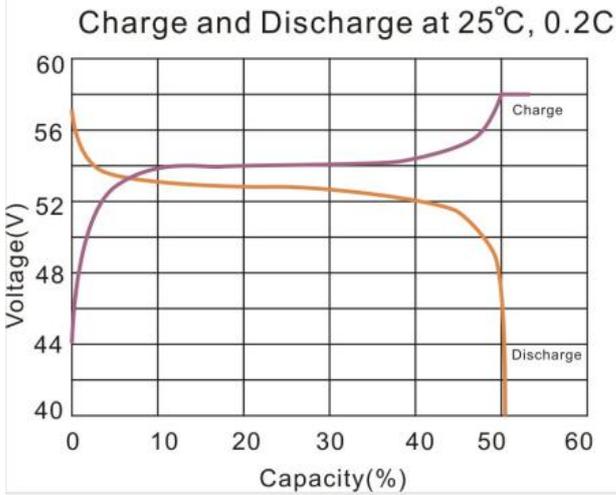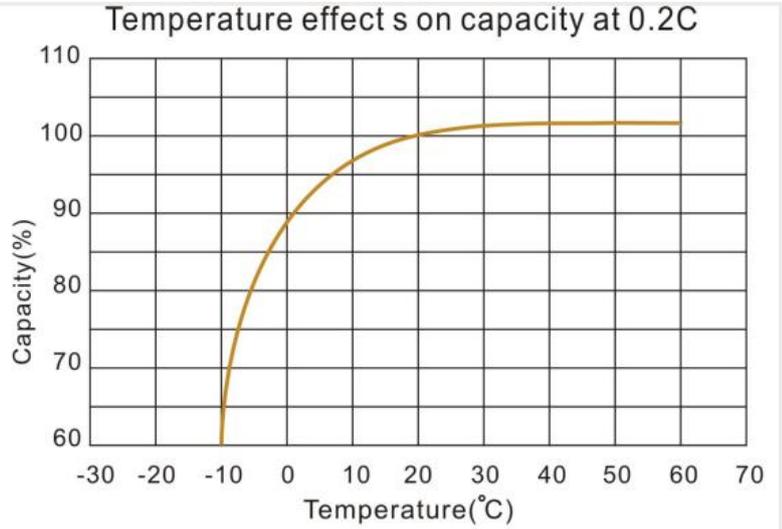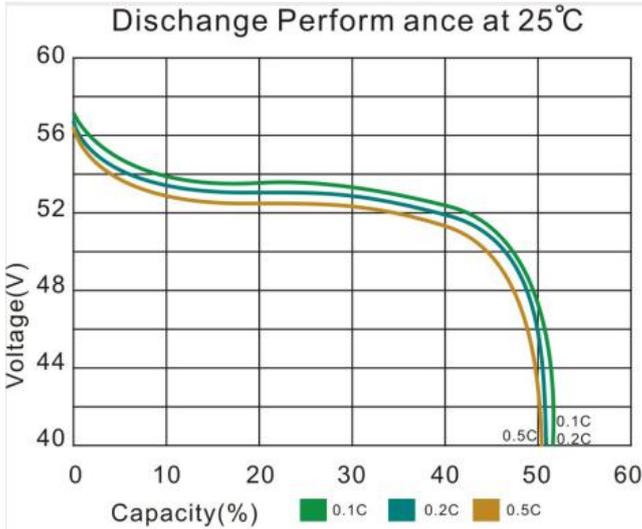

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.

**KBLI48500** 51,2V 50Ah



## FEATURES & BENEFITS



### High cycle life

>2000 cycles @80% DoD for effectively lower total cost of ownership.



### Longer service life

Low maintenance batteries with stable chemistry. Easily monitor state of charge (SoC) of smart models.



### Built in circuit protection

Battery Management Systems (BMS) are incorporated against abuse.



### Better storage

Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



### Quickly recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



### Extreme heat tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



### Lightweight

Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.

## APPLICATIONS

Lithium Iron Phosphate can be used in most applications that use Lead Acid, GEL or AGM type batteries. Suitable applications include:

- Caravan
- Marine
- Wheelchairs and scooters
- Solar / wind energy storage
- Back-up power for small UPS
- Golf trolleys & buggies
- Electric bikes
- Tools

## CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.

(Note) The Performance may vary depending on application. All specifications are subject to change without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data.

Contacto  
energy@tempelgroup.com  
www.tempelgroup.com

Tempel Group en el mundo  
HOUSTON · BARCELONA · MADRID · VALENCIA · BILBAO · SEVILHA · LISBOA · PORTO · BUENOS AIRES · LIMA ·  
SANTIAGO DE CHILE · BOGOTÁ · SÃO PAULO · CIUDAD DE MÉXICO · CIUDAD DE PANAMÁ · MONTEVIDEO · QUITO



tempel  
group