

Hi-MO **X10** Scientist

LR7-72HVD 640~670M

- **Advanced:** N-TaiRay + HPBC 2.0 + OBB
- **Value-Added:** Higher power, A+ Anti-Shading
- **Aesthetic:** No Frontal Gridlines, Scenario Integration
- **Safe:** Prevent Localized Overheating, Less Micro-Crack

15 15-year Warranty for
Materials and Processing

30 30-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

IEC62941: Guideline for module design qualification and type approval

LONGI



24.80%
MAX MODULE
EFFICIENCY

0~3%
POWER
TOLERANCE




1%
FIRST YEAR
POWER DEGRADATION

0.35%
YEAR 2-30
POWER DEGRADATION

BC-CELL
LOWER OPERATING
TEMPERATURE

Additional Value

30-Year Power Warranty

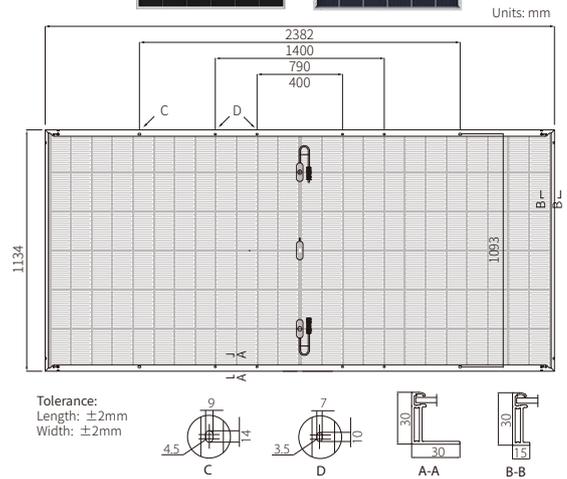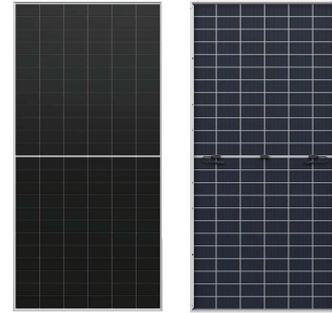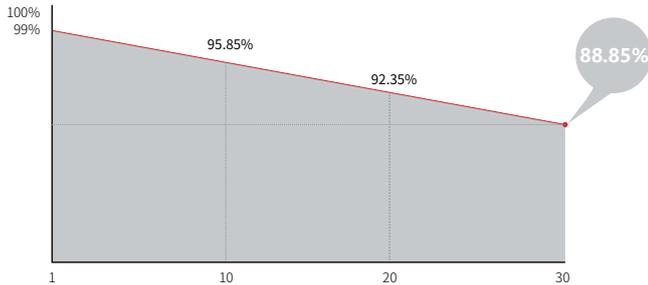

Mechanical Parameters

Cell Orientation	144 (6×24)
Junction Box	IP68, three diodes
Output Cable	4mm ² , +400, -200mm/ ± 1400 mm length can be customized
Glass	Dual glass, 2.0+2.0mm semi-tempered glass
Frame	Anodized aluminum alloy frame
Weight	32.5kg
Dimension	2382×1134×30mm
Packaging	36pcs per pallet / 144pcs per 20' GP / 720pcs per 40' HC

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C Test uncertainty for Pmax: $\pm 3\%$

Module Type	LR7-72HVD-640M	LR7-72HVD-645M	LR7-72HVD-650M	LR7-72HVD-655M	LR7-72HVD-660M	LR7-72HVD-665M	LR7-72HVD-670M
Testing Condition	STC						
Maximum Power (Pmax/W)	640	645	650	655	660	665	670
Open Circuit Voltage (Voc/V)	54.02	54.12	54.22	54.32	54.42	54.52	54.62
Short Circuit Current (Isc/A)	14.98	15.06	15.14	15.22	15.30	15.38	15.46
Voltage at Maximum Power (Vmp/V)	44.67	44.77	44.87	44.97	45.07	45.17	45.27
Current at Maximum Power (Imp/A)	14.33	14.41	14.49	14.57	14.65	14.72	14.80
Module Efficiency(%)	23.69	23.88	24.06	24.25	24.43	24.62	24.80

Electrical characteristics with different rear side power gain (Taking 665W as the baseline)

Pmax /W	Voc/V	Isc /A	Vmp/V	Imp /A	Pmax gain
688	54.32	15.98	44.97	15.30	5%
721	54.32	16.74	44.97	16.03	10%
755	54.42	17.50	45.07	16.76	15%
788	54.42	18.26	45.07	17.48	20%
821	54.42	19.03	45.07	18.21	25%

Operating Parameters

Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45 \pm 2°C
Protection Class	Class II
Bifaciality	70 \pm 5%
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.200%/°C
Temperature Coefficient of Pmax	-0.260%/°C