




QNM182-HG-72


**530-555W**

Bifacial PERC Half-Cell Module

**Max Efficiency 21.48%**

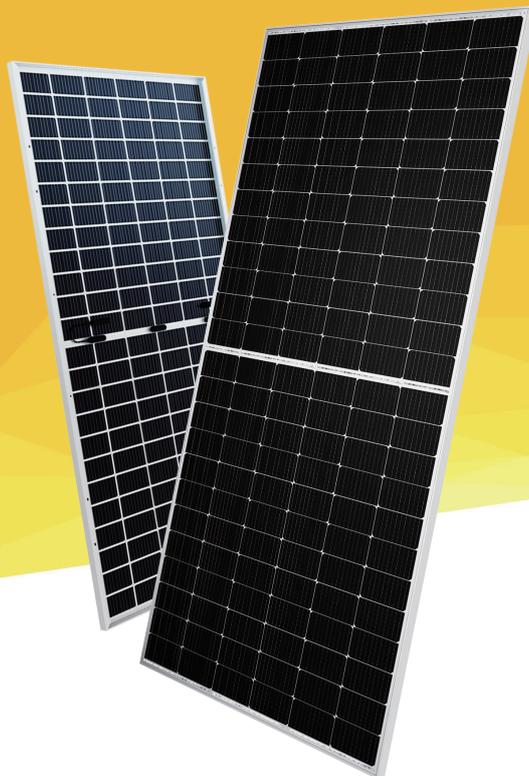

**LINEAR PERFORMANCE WARRANTY**

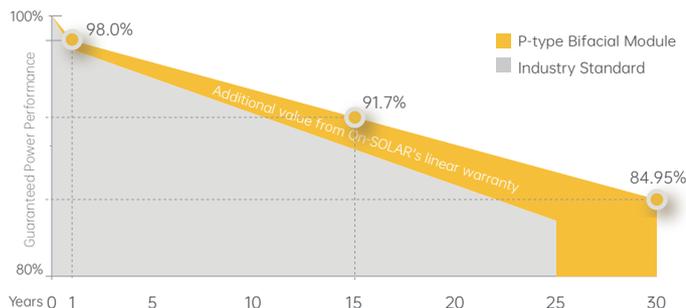

Linear power guarantee over 84.95% power output after 30 years

**12~30** years

Product materials and process warranty

**30** years

Linear power warranty

**< 2%**

First year power degradation

**< 0.45%**

Year 2~30 power degradation



Ultrahigh bifaciality, 25% maximum rear side power gain.



0~+5W positive power tolerance peak power output ensures the reliability of the module.



Effectively reduces the loss of up to 2% caused by mismatch and maximizes the output power of the system.



The module shows excellent weak light performance in the morning, evening and cloudy days.



Improved cell technology and selected materials make the module has good PID resistance.



The module can withstand wind load of up to 2400Pa and snow load of 5400Pa.


**COMPREHENSIVE CERTIFICATES**




• IEC 61215, IEC 61730 • UNI9177 • ISO 9001:2015 • ISO 14001:2015 • ISO 45001:2018

\* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.

**PERFORMANCE INSURANCE**



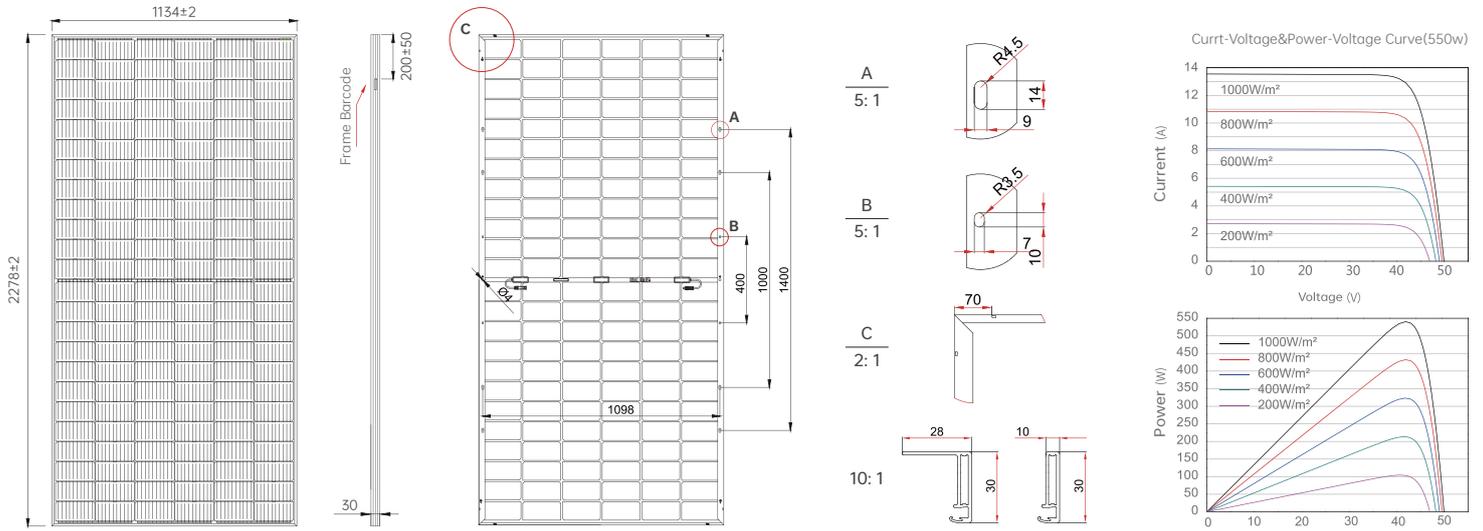

ELECTRIC CHARACTERISTICS (STC)

Module Type	QNM182-HG530-72	QNM182-HG535-72	QNM182-HG540-72	QNM182-HG545-72	QNM182-HG550-72	QNM182-HG555-72
STC Peak Power - <b>Pmax(Wp)</b>	530	535	540	545	550	555
Optimum Working Voltage - <b>Vmp(V)</b>	41.00	41.19	41.38	41.58	41.77	41.96
Optimum Working Current - <b>Imp(A)</b>	12.93	12.99	13.05	13.11	13.17	13.23
Open Circuit Voltage - <b>Voc(V)</b>	49.52	49.65	49.78	49.91	50.04	50.17
Short Circuit Current - <b>Isc(A)</b>	13.45	13.50	13.55	13.61	13.65	13.69
Module Efficiency (%)	20.52	20.71	20.90	21.10	21.29	21.48

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C , Spectra at AM1.5.

ELECTRICAL CHARACTERISTICS WITH 10% REAR SIDE POWER GAIN

Total Equivalent power - <b>Pmax (Wp)</b>	583	589	594	600	605	611
Maximum Power Voltage - <b>Vmp(V)</b>	41.00	41.19	41.38	41.58	41.77	41.96
Maximum Power Current - <b>Imp(A)</b>	14.22	14.29	14.36	14.42	14.49	14.55
Open Circuit Voltage - <b>Voc(V)</b>	49.52	49.65	49.78	49.91	50.04	50.17
Short Circuit Current - <b>Isc(A)</b>	14.80	14.85	14.91	14.97	15.02	15.06

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

MECHANICAL PARAMETERS

Cell Type	P-type PERC Monocrystalline	
Number of Half Cells	144(6×24)	
Module Size	2278mm × 1134mm × 30mm (35mm)	
Weight	30.8 kg (30mm Frame) / 31.2 kg (35mm Frame)	
Glass	Dual, 2.0mm Coated tempered glass	
Frame	Anodized aluminum alloy	
Junction Box	IP68 standard (3 bypass diode)	
Output Cable	TUV (2pfg1169:2007)	4mm²/1200mm
Connector	MC4 or (Compatible with MC4)	
Hailstone Test	25mm Hailstone at the speed of 23m/s	
Mechanical Load	Max. Snow load 5400 Pa, Max. Wind load 2400 Pa	

NOCT: Irradiance 800W/m², Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s.

TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of <b>Pmax</b>	-0.31%/°C
Temperature Coefficient of <b>Voc</b>	-0.28%/°C
Temperature Coefficient of <b>Isc</b>	0.054%/°C
Power Tolerance (W)	0~+5W
Maximum Series Fuse Rating	25A
Maximum System Voltage	DC1500V
Operating Module Temperature	-40°C ~ +85°C

PACKING CONFIGURATION (40'HC)

720 pcs / container , 20 pallets , 36 pcs / pallet (30mm Frame)
620 pcs / container , 20 pallets , 31 pcs / pallet (35mm Frame)



Web: [www.qn-solarpv.com](http://www.qn-solarpv.com) E-mail: [info@qn-solarpv.com](mailto:info@qn-solarpv.com)

\* The technical parameters contained in this datasheet may deviate slightly, and OnSolar does not guarantee that they are completely accurate. Due to continuous innovation, research and development and product improvement, OnSolar reserves the right to adjust the information in this datasheet at any time without prior notice. The customer should obtain the latest version of datasheet when signing the contract and make it an integral part of the binding contract signed by both parties. The Chinese (or other language) translation files of this datasheet are for reference only. If there is any inconsistency between the English version and the Chinese version (or other language versions), the English version shall prevail.



View Our Web