


12
YEARS
WARRANTY

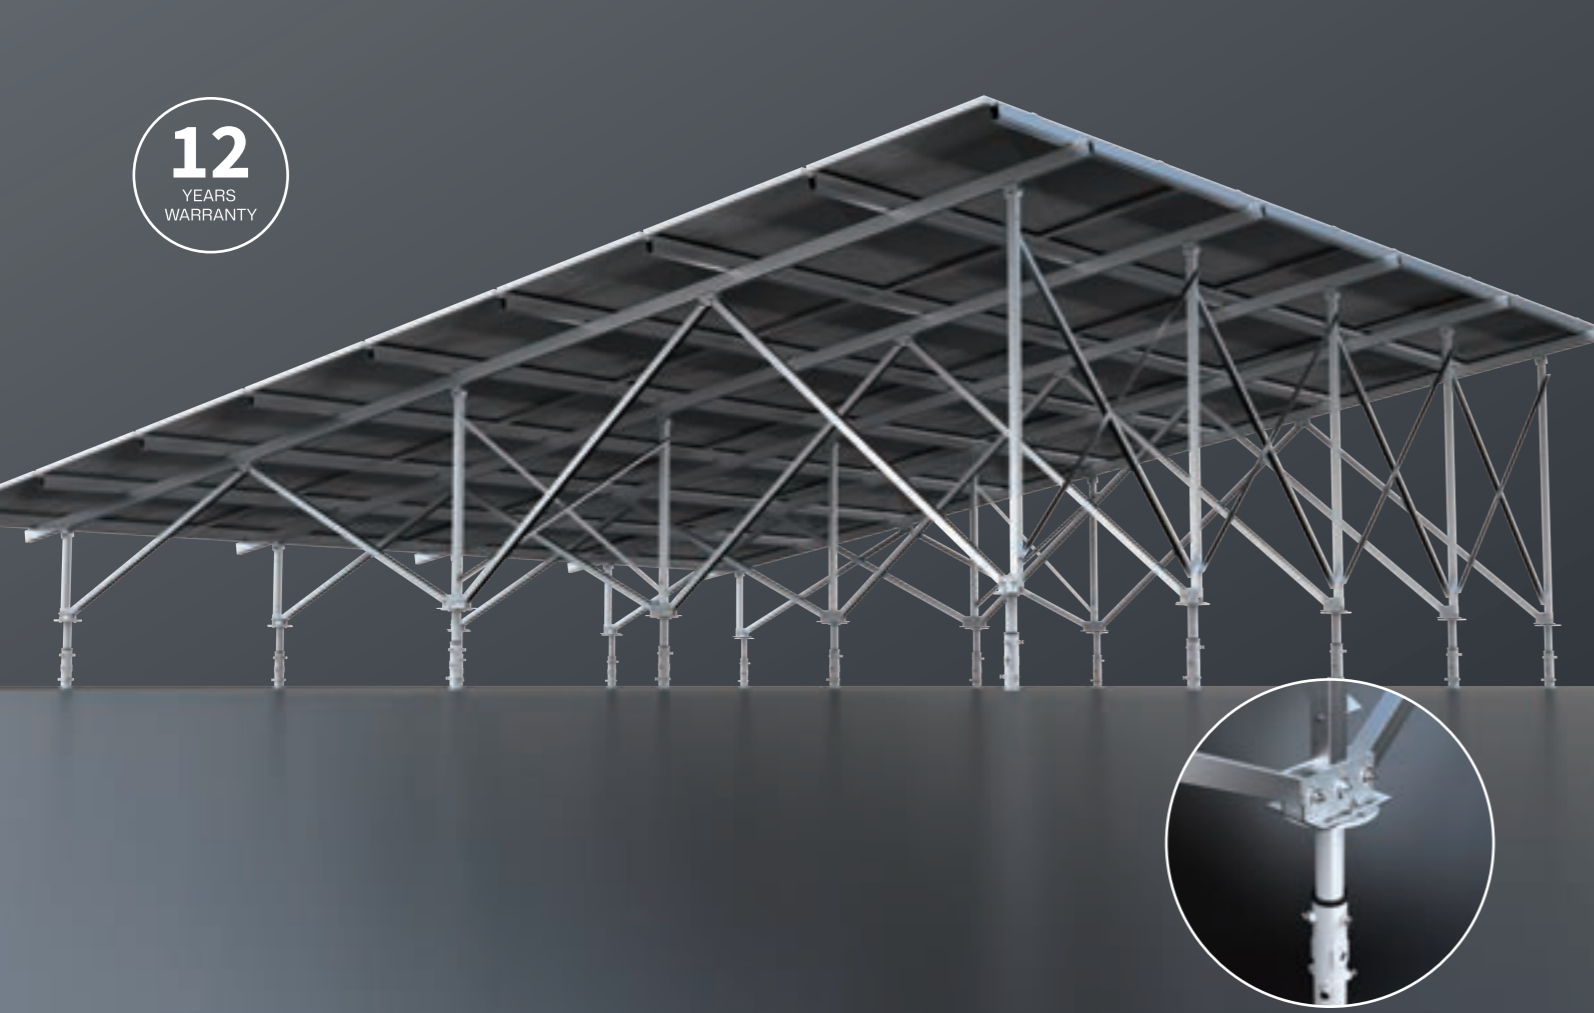


GROUND MOUNTING SYSTEM

Aluminum Mounting Bracket


Components



Ground Screw Pile




Rail



Rail Connector



H-Connector



H Base



Rail Block

Specifications

Material	AL 6005-T5 & SUS 304
Coating Thickness	AA10-12, higher standards available upon request
Wind Speed	70m/s (up to 316.8Km/h 196.9mph)
Standard	AS/NZ1170.2:2011/JISC8955-2017/ASCE7-10
Corrosivity Category	C3, higher standards can be customized

Features

- 1 Lightweight & corrosion-resistant
- 2 High-strength, durable aluminum alloy
- 3 Pre-assembled & easy to install
- 4 Compatible with various terrains