



12
YEARS
WARRANTY

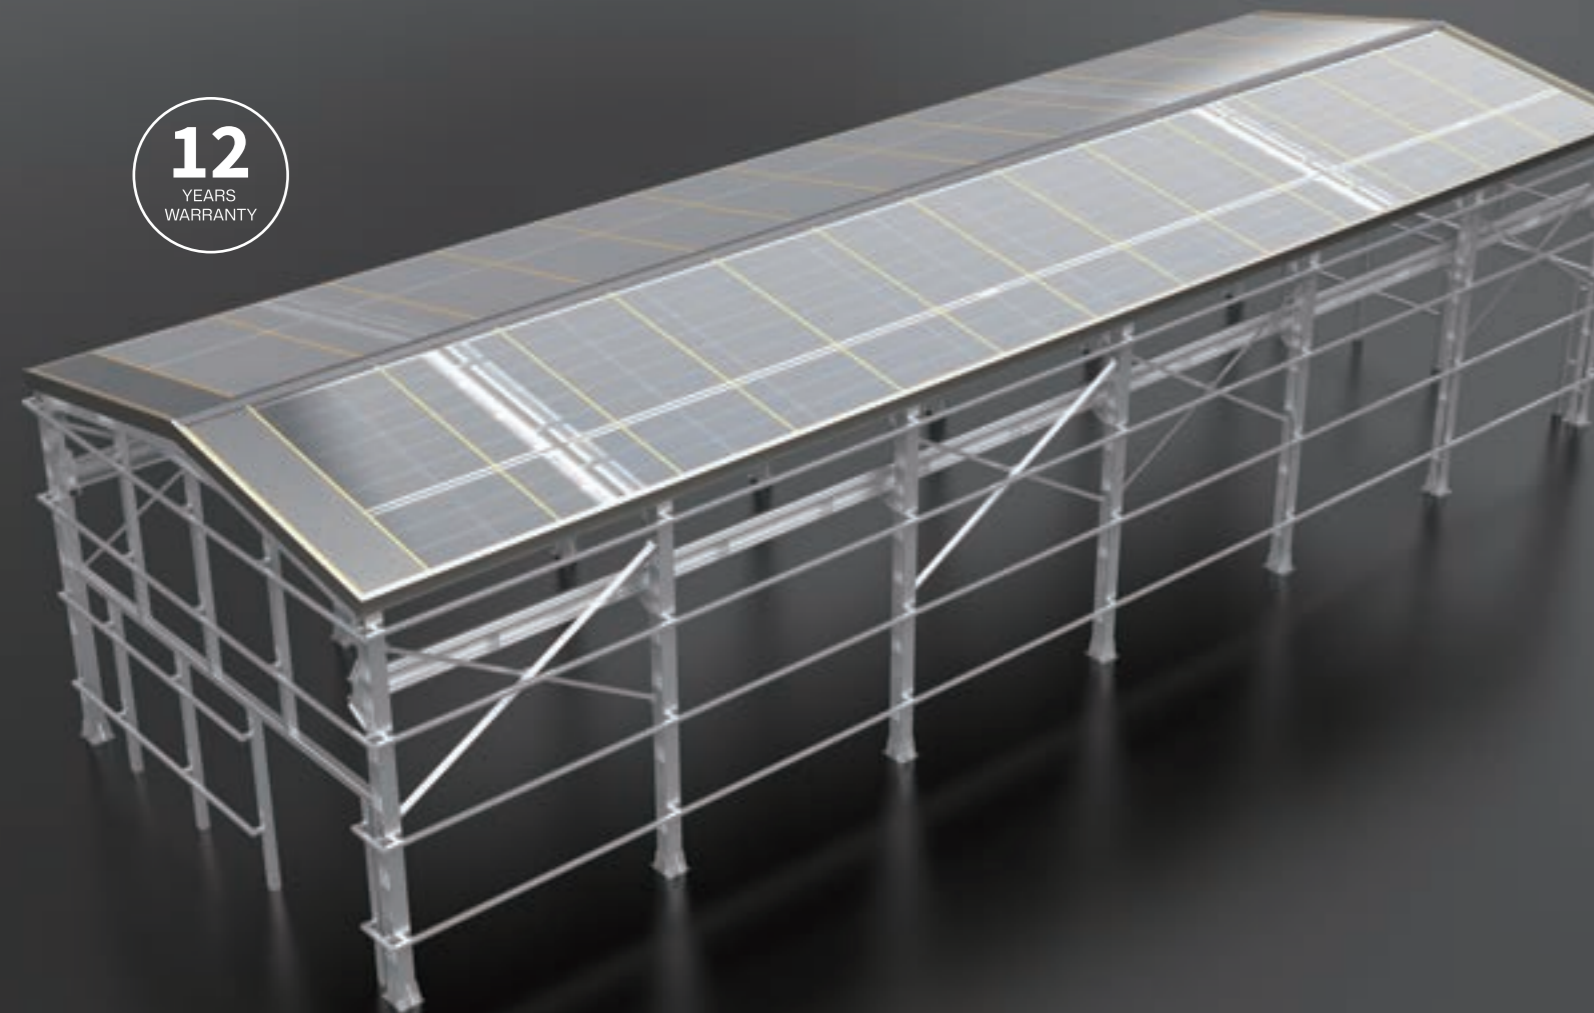

BIPV MOUNTING SYSTEM

Versatile Solution for C&I, RCC Roofs

Components

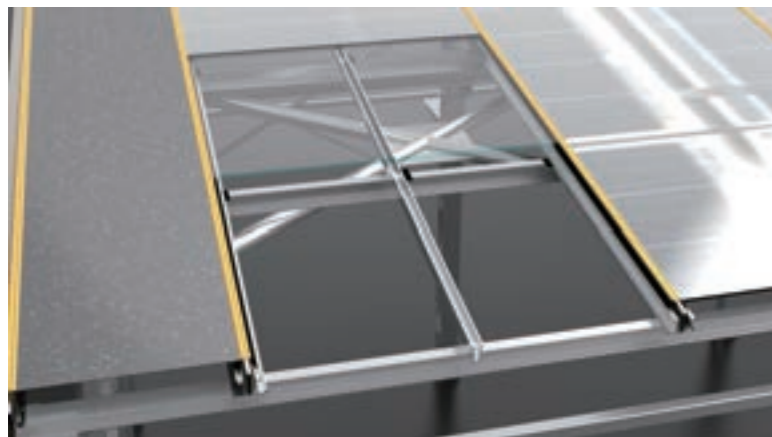

Specifications

Material	AL 6005-T5 & Zn-Al-Mg coated steel
Coating Thickness	AA10-12, higher standards available upon request
Wind Speed	70m/s (up to 316.8Km/h 196.9mph)
Standard	AS/NZ1170.2:2011/JISC8955-2017/ASCE7-10
Corrosivity Category	C3, higher standards can be customized

Features

- 1 Seamless Roof Integration
- 2 Dual-Function Cost Savings
- 3 Superior Weather Resistance
- 4 Heavy-Duty Load Capacity