


12
YEARS
WARRANTY

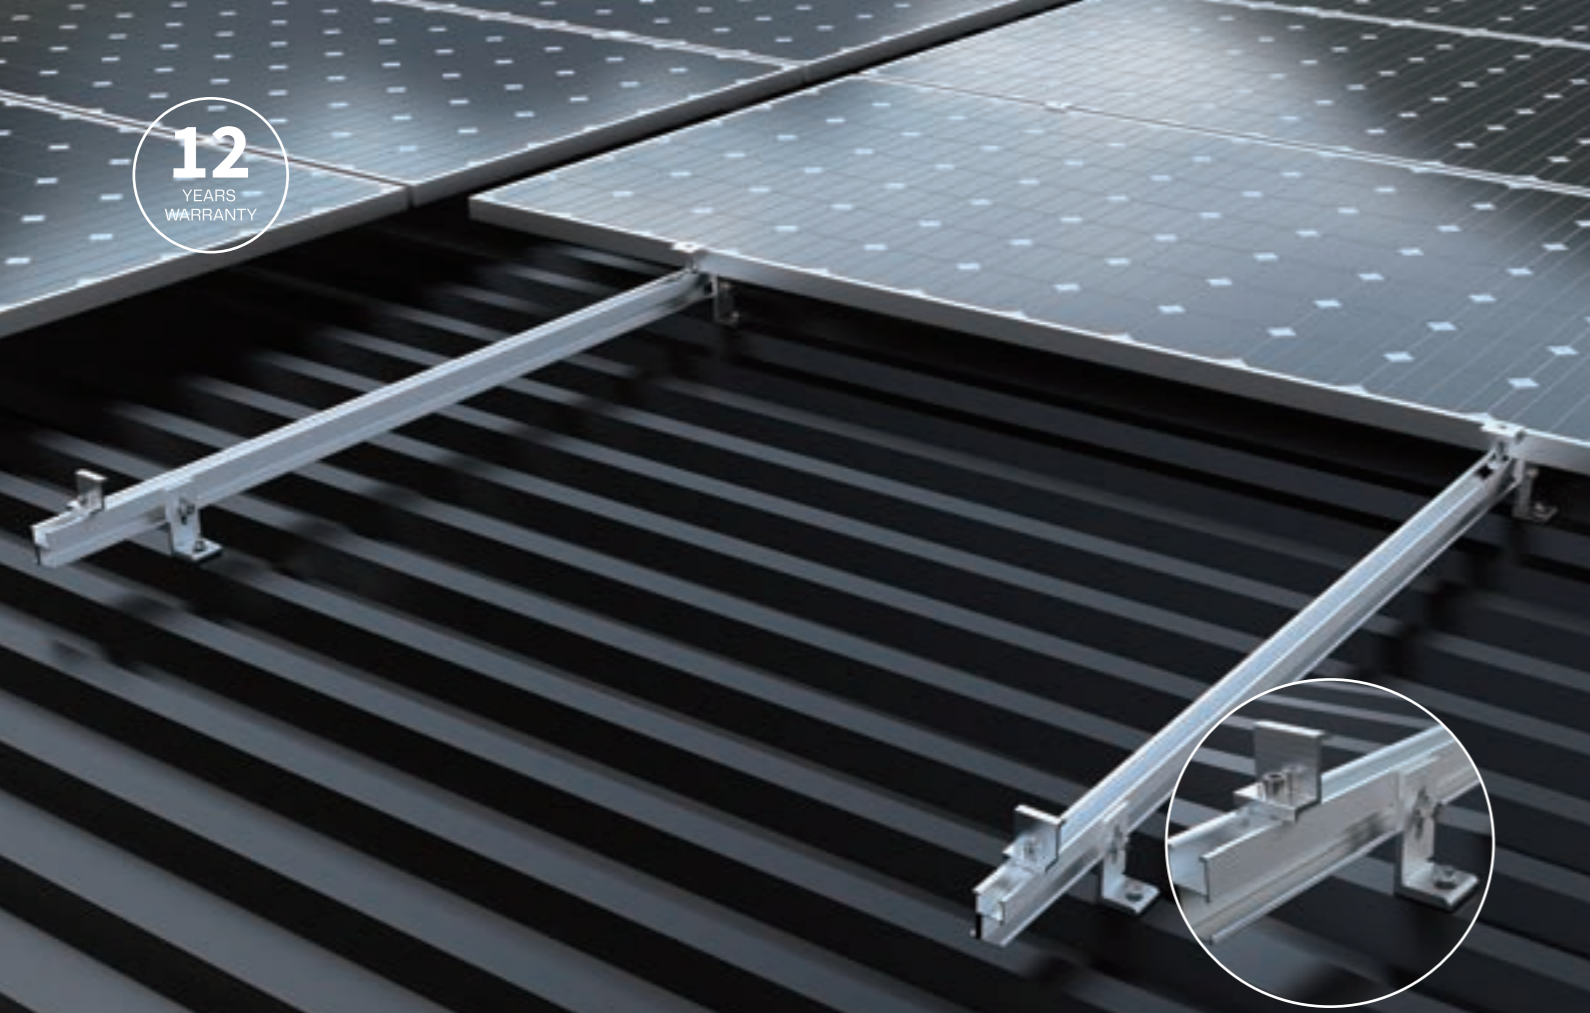


METAL ROOF SOLAR MOUNTING SYSTEM

L-Feet Solar Mounting Structure

Components



L Feet



L Feet+ Hanger Bolt
(Optional)



Rail



Rail Connector



Mid Clamp



End Clamp

Specifications

Material	AL 6005-T5 & SUS 304
Coating Thickness	AA10-12, higher standards available upon request
Wind Speed	70m/s (up to 316.8Km/h 196.9mph)
Standard	AS/NZ1170.2:2011/JISC8955-2017/ASCE7-10
Corrosivity Category	C3, higher standards can be customized

Features

- 1 Universal Compatibility:**
Designed to match a wide variety of roof clamps and solar mounts.
- 2 Fast Installation:**
Direct mounting onto a metal roof using self-tapping screws or hanger bolts.
- 3 Robust & Corrosion-Resistant:**
Manufactured for superior strength and durability to withstand harsh environmental conditions.