


12
YEARS
WARRANTY



ASPHALT SHINGLE ROOF MOUNTING SYSTEM

Components

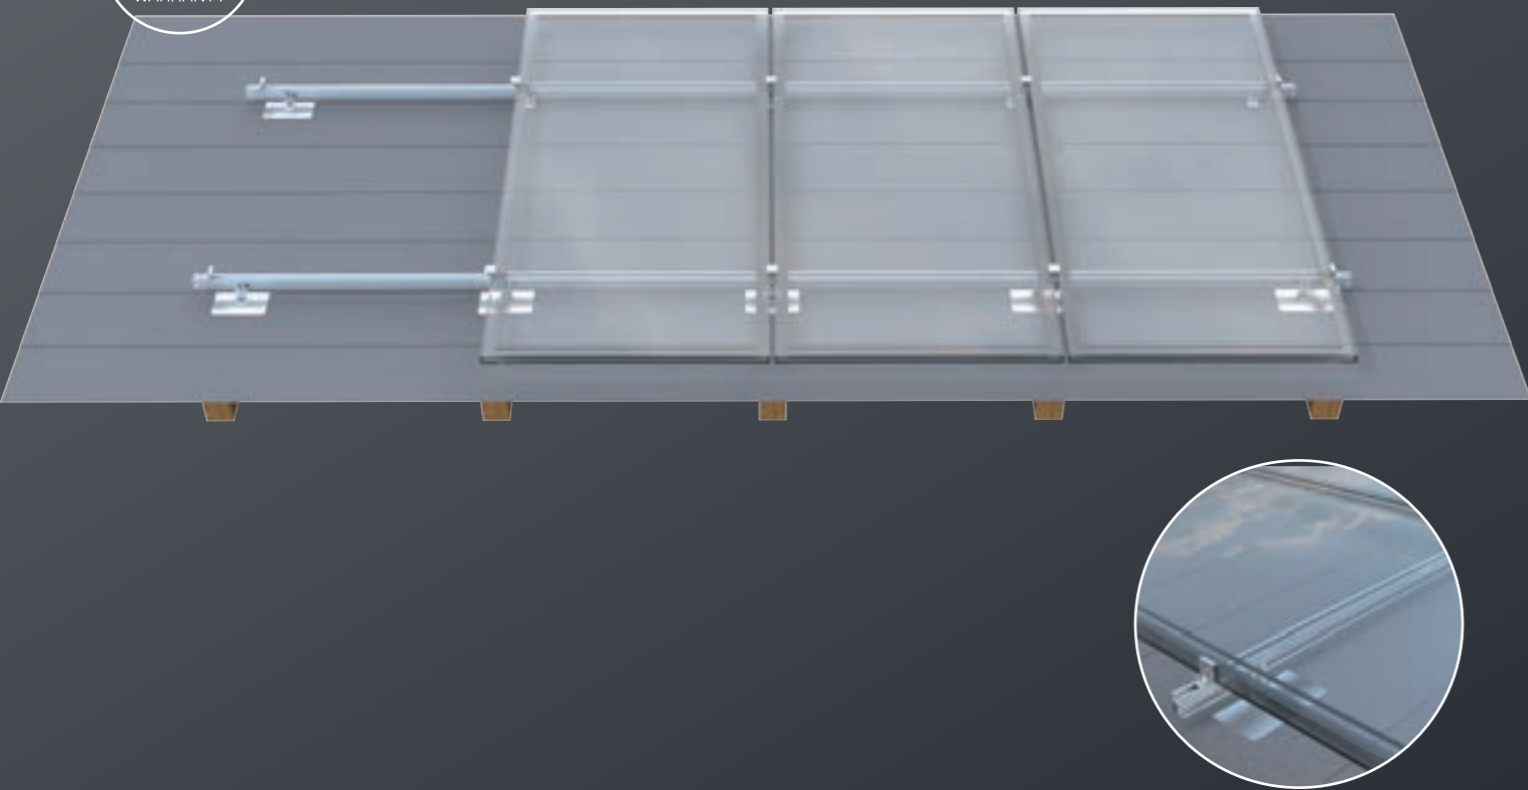

L Feet



Rail



Rail Connector



Mid Clamp



End Clamp

Specifications

Material	AL 6005-T5 & SUS 304
Coating Thickness	AA10-12, higher standards available upon request
Wind Speed	70m/s (up to 316.8Km/h 196.9mph)
Standard	AS/NZ1170.2:2011/JISC8955-2017/ASCE7-10
Corrosivity Category	C3, higher standards can be customized

Features

- 1 Compatibility:**
Designed to fit the profile of most 3-tab and architectural shingles.
- 2 Rapid Installation:**
Simple and fast mounting process that minimizes on-roof time.
- 3 Weather-Resistant Materials:**
Anodized aluminum for durable and long life.