


Solargiga Energy

Giga Sup7

JMPV-XVT6/48-440~455(R)

MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

Maximum Power	Maximum Efficiency	Power Tolerance
455W	22.8%	0~+3%

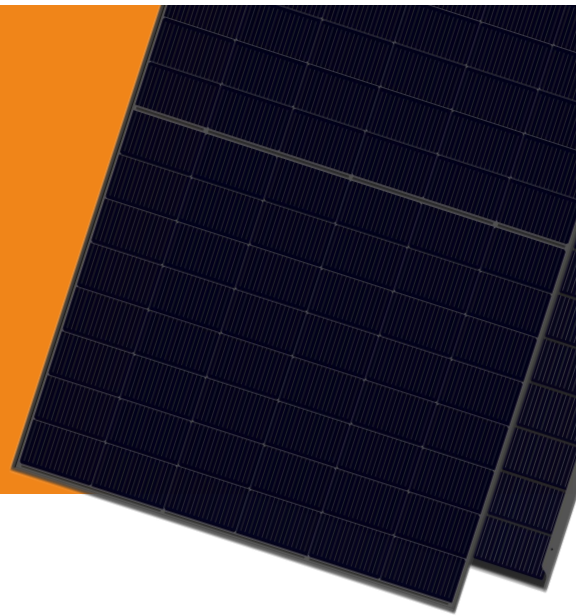

CELL TYPE

N-Type/MBB/Monocrystalline/Half-Cell



HIGH EFFICIENCY, HIGH GENERATION

Based on monocrystalline silicon wafer and TOPCon cell technology, the power generation efficiency has greatly improved with lower degradation and better temperature coefficient.



EXCELLENT ANTI-PID PERFORMANCE

Cell manufacturing technology optimization and materials control will help reduce PID degradation rate to the minimum.



SUPPORT 1500V SYSTEM

Increase the number of system modules in series, reduce overall cost of terminal power plant.




STRONG MECHANICAL LOAD CAPACITY

Withstand snow pressure up to 5400Pa on the front face and wind pressure up to 2400Pa on the rear face.

12 YEARS Product Warranty

30 YEARS Power Output Warranty

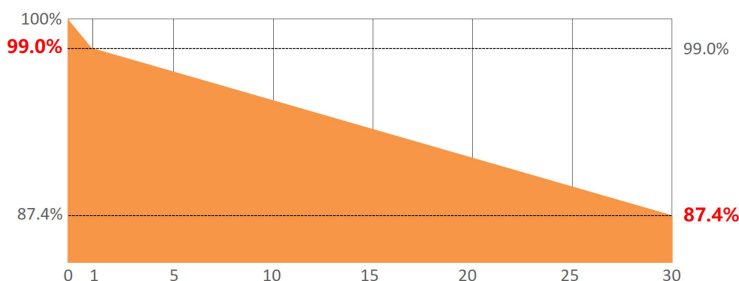

First Year Power Degradation : 1% , Subsequent Annual Power Degradation : 0.4%.
*Please refer to the product warranty for details.

MANAGEMENT SYSTEM CERTIFICATES

- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO 45001: Occupational Health and Safety Management System
- ISO 5001: Energy Management System
- ISO 14067: Product Carbon Footprint Limited Assurance
- ISO 14025: Product Environmental Declaration
- IEC 62941: Quality Management System for PV Module Manufacturing

PRODUCT CERTIFICATES

- IEC61215/ IEC61730/ IEC62804-1/ IEC61701/ IEC62716
- IEC60068-2-68/ UNI 9177



*The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Solargiga Energy sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.

PICC

ADDITIONAL PREMIUM INSURANCE SERVICES ARE AVAILABLE



Solargiga Energy

Founded in 2000 , Solargiga Energy Holdings Limited ('Solargiga Energy' , HKEX:00757.HK), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing , photovoltaic application and global marketing . It 's committed to provide PV products, technical support and integrated system solution for global customers.

Website: en.solargiga.com

DS-TSEL-V1.0

MBB MONO-CRYSTALLINE BIFACIAL HALF-CUT MODULE

MODEL NUMBER JMPV-XVT6/48-440~455(R)

ELECTRICAL PARAMETERS (STC)

	440	445	450	455
Max Power (Pmax/W)	440	445	450	455
Max Power Voltage(Vmp/V)	29.40	29.55	29.73	29.90
Max Power Current (Imp/A)	14.97	15.06	15.14	15.22
Open Circuit Voltage(Voc/V)	35.20	35.39	35.59	35.78
Short Circuit Current (Isc/A)	15.92	16.01	16.10	16.19
Module Efficiency (%)	22.0	22.3	22.5	22.8

STC(Standard Test Condition): AM1.5, Irradiance 1000W/m², Cell Temperature 25°C

ELECTRICAL PARAMETERS (NMOT)

	328.52	332.13	336.12	339.73
Max Power (Pmax/W)	328.52	332.13	336.12	339.73
Max Power Voltage(Vmp/V)	27.40	27.54	27.71	27.87
Max Power Current (Imp/A)	11.99	12.06	12.13	12.19
Open Circuit Voltage(Voc/V)	32.92	33.10	33.28	33.46
Short Circuit Current (Isc/A)	12.85	12.92	13.00	13.07

NMOT(Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

ELECTRICAL PARAMETERS (BNPI)

	486	492	497	503
Max Power (Pmax/W)	486	492	497	503
Max Power Voltage(Vmp/V)	29.48	29.67	29.81	30.01
Max Power Current (Imp/A)	16.49	16.58	16.67	16.76
Open Circuit Voltage(Voc/V)	35.32	35.51	35.72	35.91
Short Circuit Current (Isc/A)	17.61	17.71	17.81	17.91

BNPI(Bi-facial Nameplate Irradiance): AM1.5, Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25°C

TEMPERATURE CHARACTERISTICS

Cell Operating Temperature	45±2°C
Temperature Coefficient of Isc	0.047%/°C
Temperature Coefficient of Voc	-0.240%/°C
Temperature Coefficient of Pmax	-0.280%/°C

MECHANICAL PARAMETERS

Cell Type	N Type/MBB/Half-Cell	Number of Cells	96Pcs
Weight	24.5kg		
Front Glass	2.0mm Semi-tempered embossed coated glass		
Back Glass	2.0mm Semi-tempered glass (Black)		
Frame	Anodized Aluminum (Black)		
Dimension	1762 × 1134 × 30mm		
Junction Box	Protection Degree IP68; 3 diodes		
Cable	1×4.0 mm ² ; +300mm, -200mm /or customized length		

OPERATING CONDITIONS




Maximum System Voltage	1500V	Max Front Face Static Load (Snow etc)*	5400Pa
Operating Temperature	-40°C~+85°C	Max Rear Face Static Load (Wind etc)*	2400Pa
Maximum Series Fuse Rating	30A		
Bifaciality coefficient	ΦVoc=(99±5)%, ΦIsc=(80±10)%, ΦPmax=(80±10)%		

*Installation should strictly obey the installation manual of Solargiga Energy

PACKING INFORMATION

36pcs/pallet	936pcs/40'HQ	1152pcs/17.5m flatcar
--------------	--------------	-----------------------

*Powertestuncertainty +/-3%

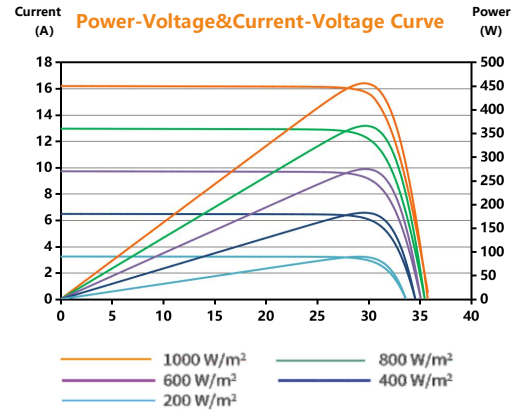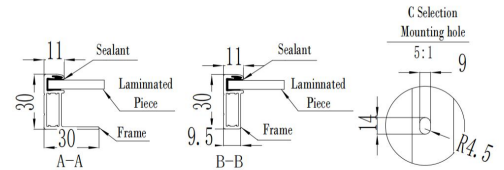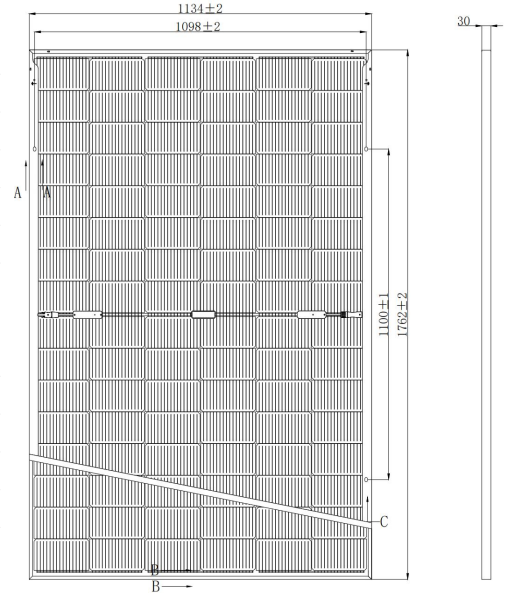

Sales HOT-line: (86)0416 508 1599
 E-mail: sales@jz.solargiga.com
 Xihai Industry Park, Economic and
 Technical Development Zone,
 Jinzhou, Liaoning Province, China.

Note: Electrical parameters are only used for comparison between different types of modules. Due to product innovation, Solargiga Energy reserves the right to adjust the information in this datasheet at any time without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.



DS-TSEL-V1.0