


05

## EnerXPack 5000

48V Battery Pack Module

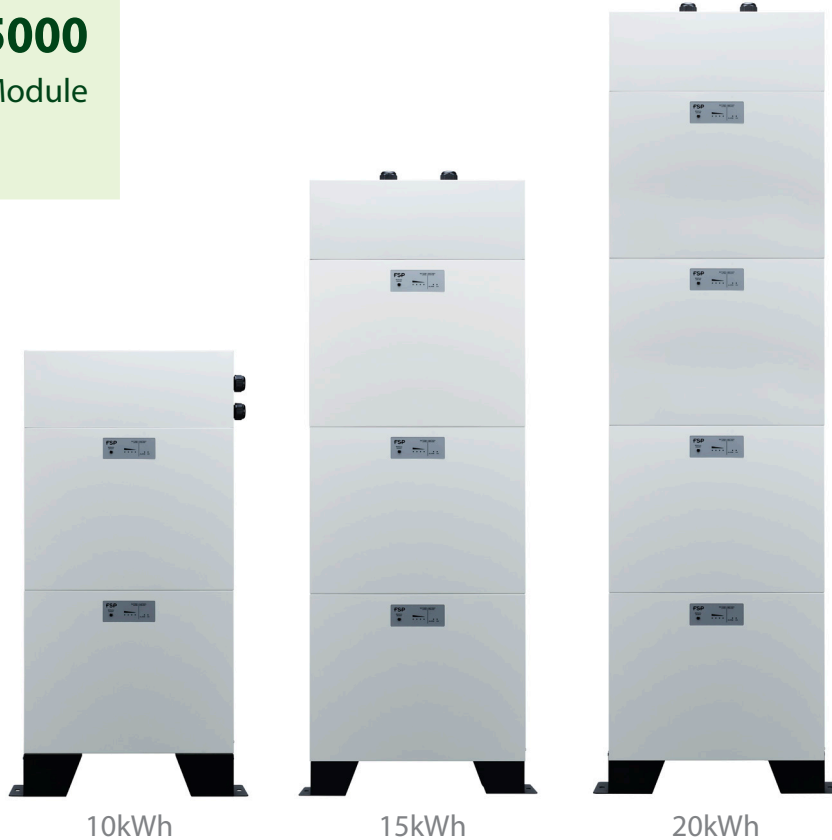

10kWh

15kWh

20kWh

### EnerXPack 5000 Specifications

#### FEATURES

- Operated with LightUp series off-grid inverter.
- Flexible configuration from 10kWh to 20kWh.

MODEL NAME		EnerXPack 5000		
Cell Material		LFP		
Applicable Inverter Power (kW)		6 ~ 12		
Number of Module	2	3	4	
Output Energy (kWh)	10	15	20	
Nominal Voltage (V)	51.2	51.2	51.2	
Operating Voltage Range (V)	40 ~ 56	40 ~ 56	40 ~ 56	
Nominal Discharge Current (A)	300	300	300	
Maximum Discharge Current (A)	384 (@1 min)	384 (@1 min)	384 (@1 min)	
MECHANICAL				
Dimension (mm)	D 185 x W 540 x H 1040	D 185 x W 540 x H 1460	D 185 x W 540 x H 1880	
Net Weight (kgs)	102	150	198	
INTERFACE				
Communication	RS485 port (RJ45) / CAN			
ENVIRONMENTAL				
Operating Temperature (°C)	0 ~ 50			
Storage Temperature (°C)	25 ~ 45 (under 3 Months) : -20 ~ 25 (under 18 Months)			
IP Protection	IP 20			
SAFETY				
Cerifications	UN 38.3 / IEC 62619			

Product specifications are subject to change without further notice.