

# Sun-Pursuit Series

Monocrystalline  
144 - cell Module

TW-555HT

**530-555W**

0-3% Positive Tolerance



Monocrystalline




Half Cell



10BB



Grade A

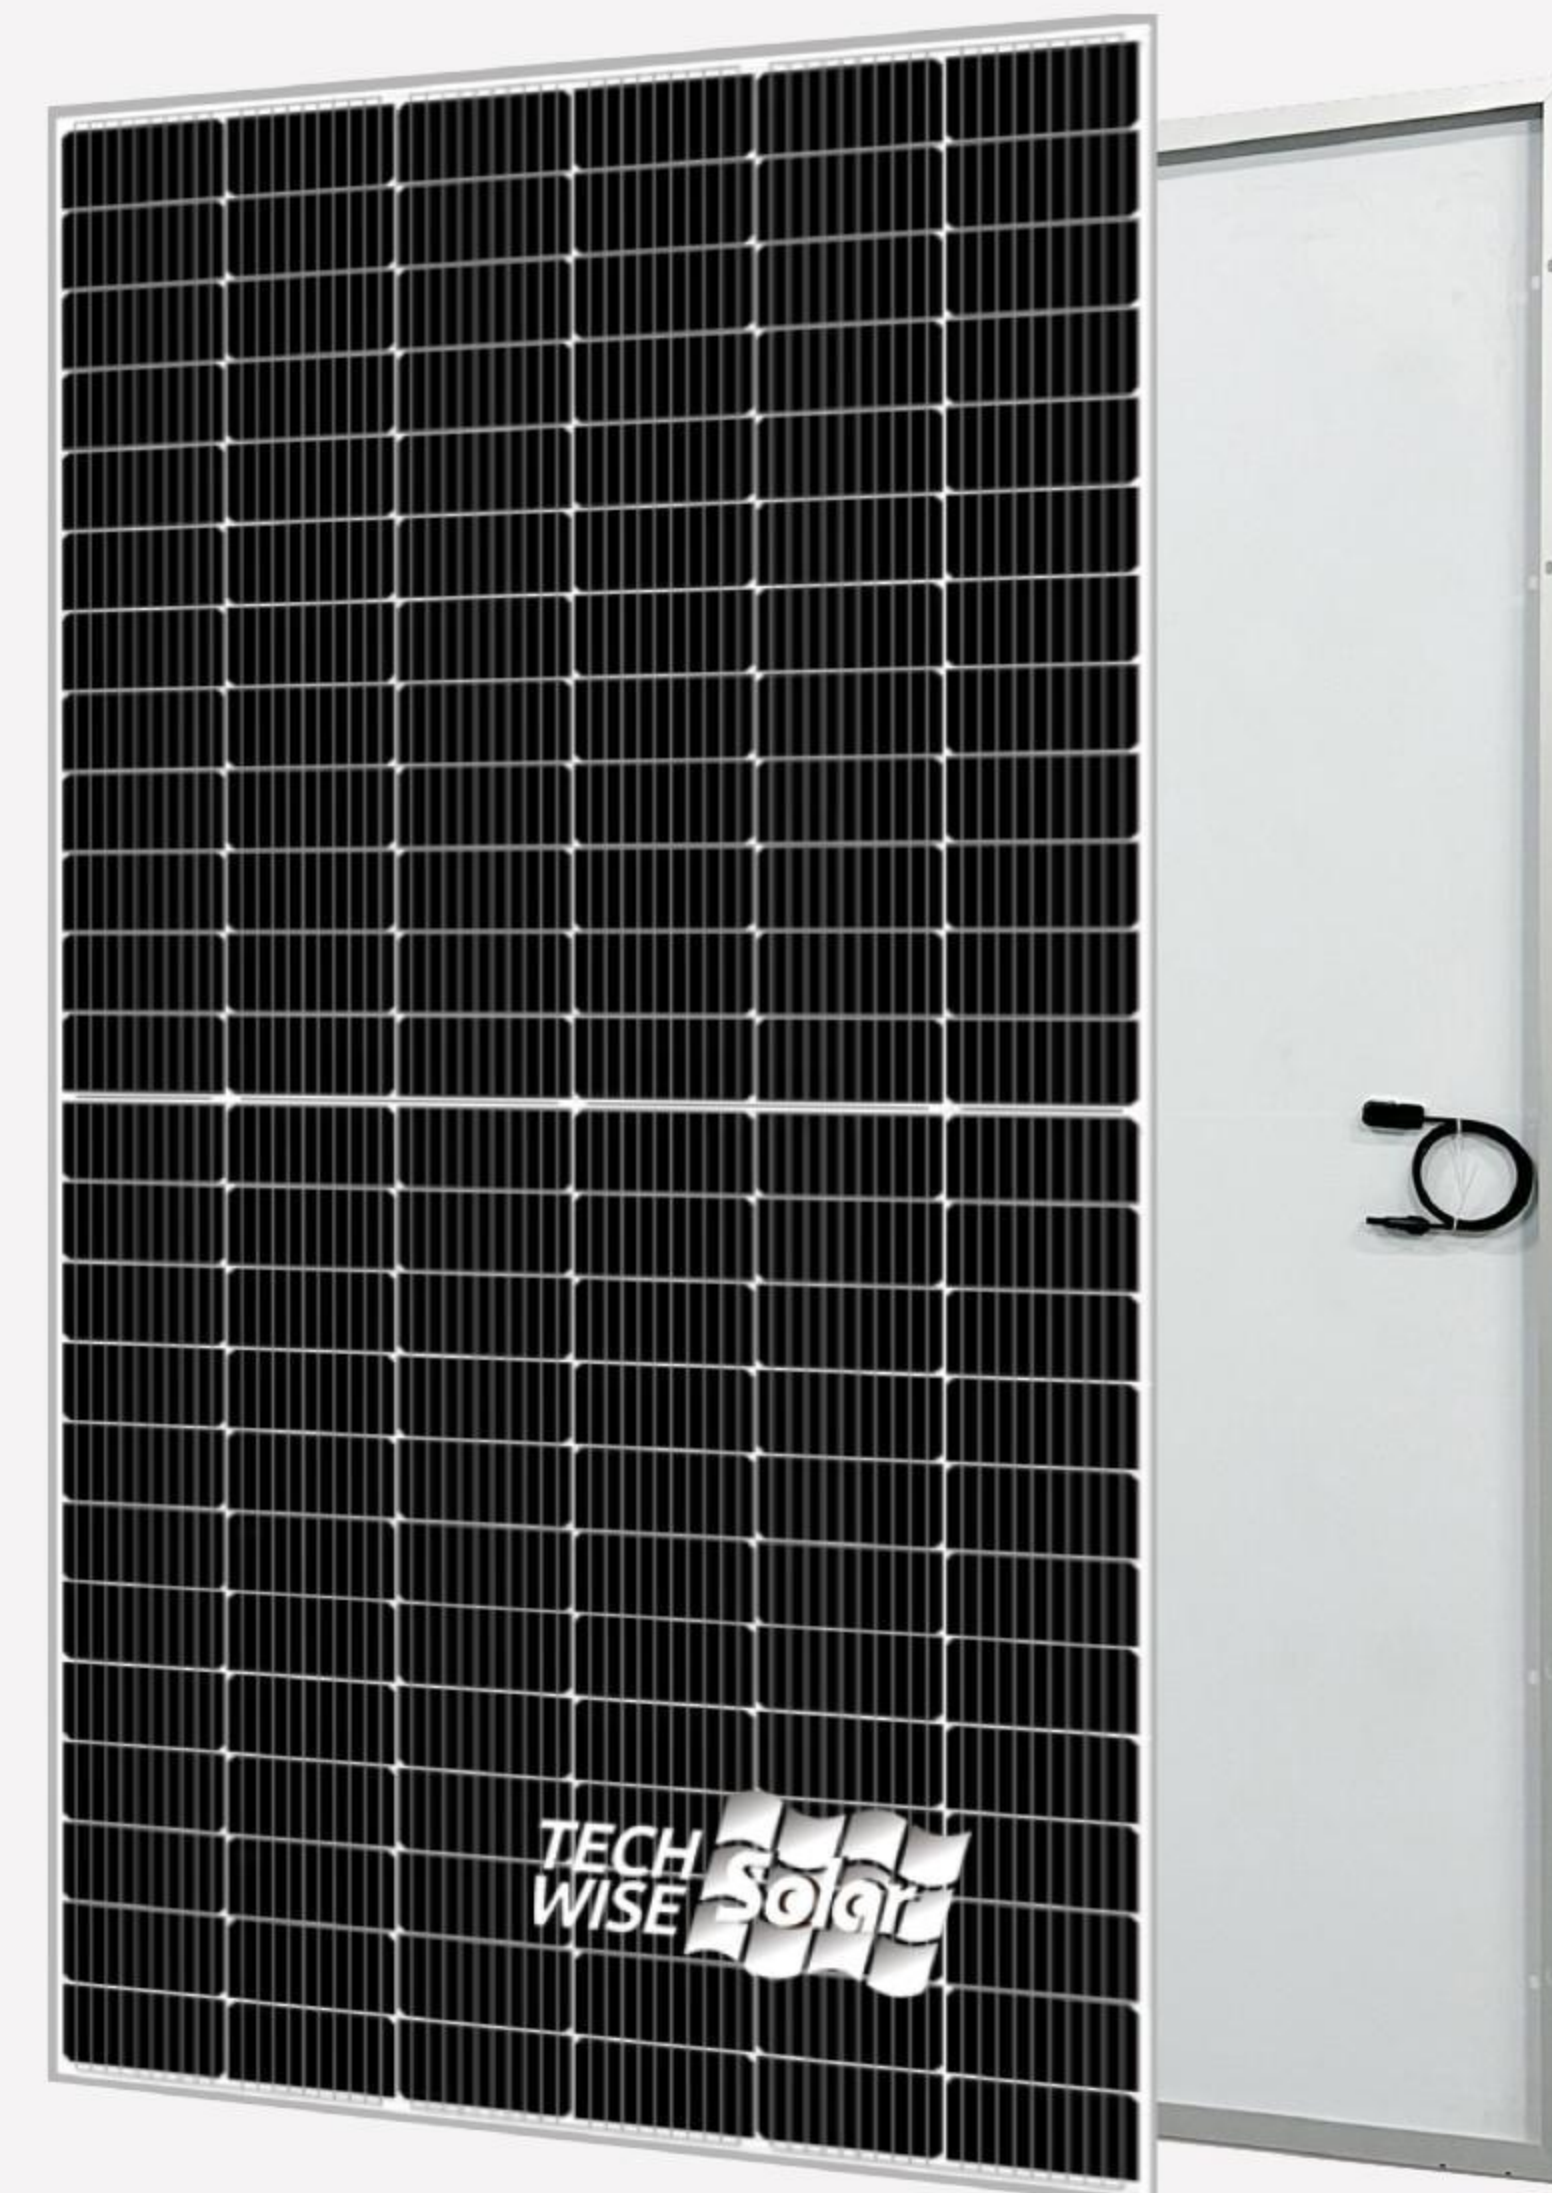

## • MODULE FEATURES



### High efficiency

PERC technology improves efficiency, increases power generation, and contributes to lower LCOE.



### Lower heat spot Risk

Innovative circuit design and "Half Cell" structure decrease the temperature of heat spots and effectively reduce power loss.



### Excellent low-light performance

Reliable performance in low-light conditions such as in the morning, at dusk or during raining days.



### Resilient to extreme weather

Carefully selected materials ensure the module still works well under the condition of 2400Pa wind load and 5400Pa snow load.



### PID resistant

High quality solar cell and advanced processing technology contribute to excellent PID resistance performance.


## • Quality Certification



## • Product Qualification



## • Performance Warranty

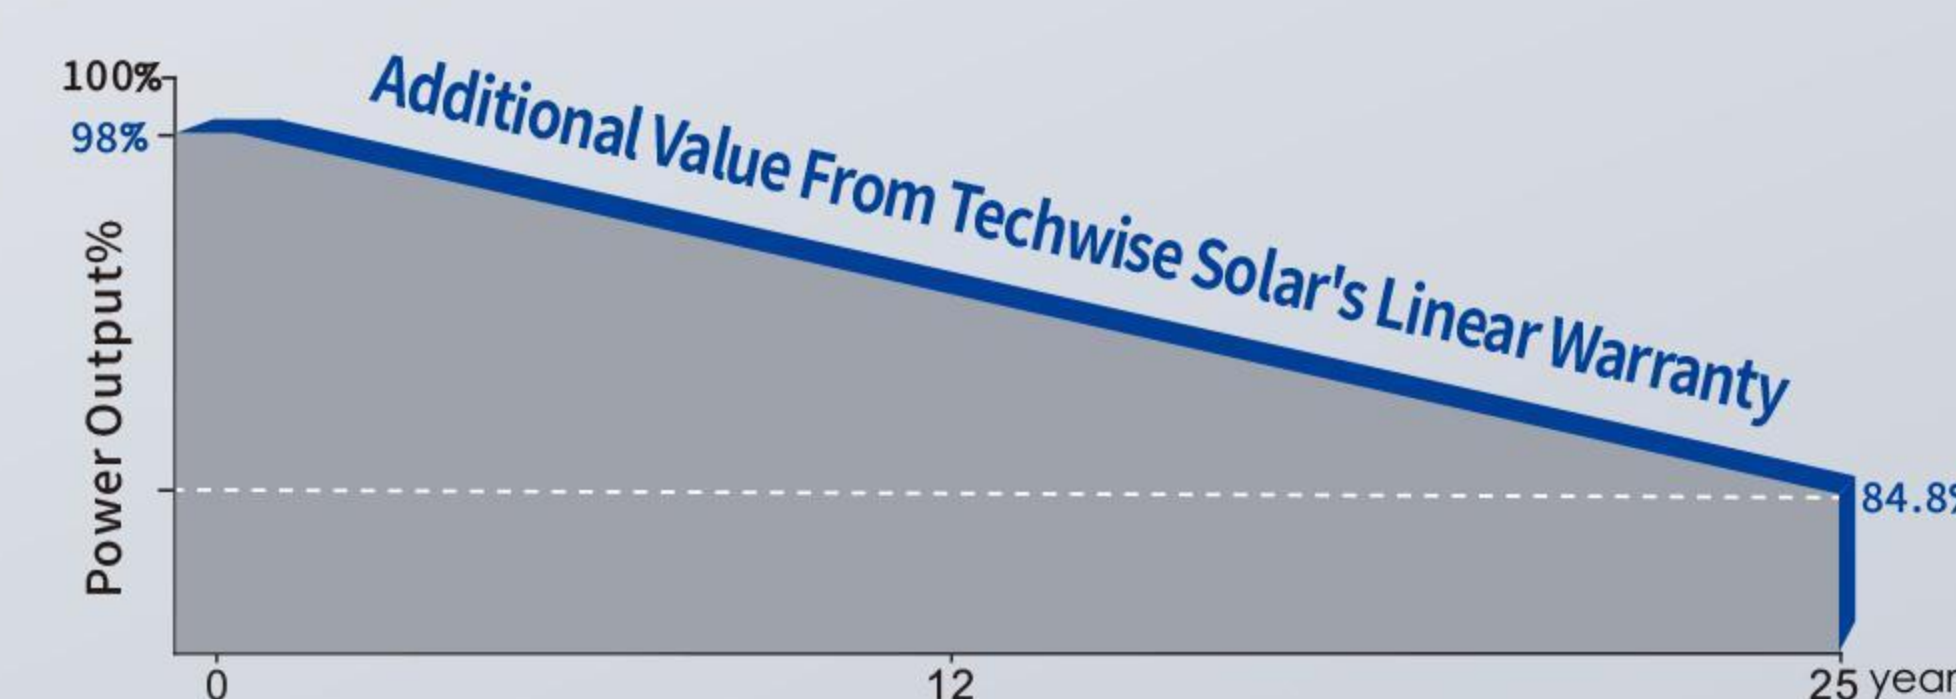

**12** 12 Years Product Warranty


**25** 25 Years Linear Power Warranty

## TW-555HT

### • Product Specification •

Cell Type	Mono crystalline
Cell Quantity	144 cell
Cell Size (mm)	182*91
Module Size (mm)	2279*1134*35
Module Weight (kg)	27
Glass Thickness (mm)	3.2
Frame Material	Anodized aluminum alloy
Junction Box	IP68
Cable/Connector	4mm <sup>2</sup> , MC4 compatible
Cable Length	+300mm/-300mm; or Customize
Max System Volt (V)	1500V DC
Max Fuse Rate (A)	25
Power Tolerance	0+3%

### • Engineering Drawings •

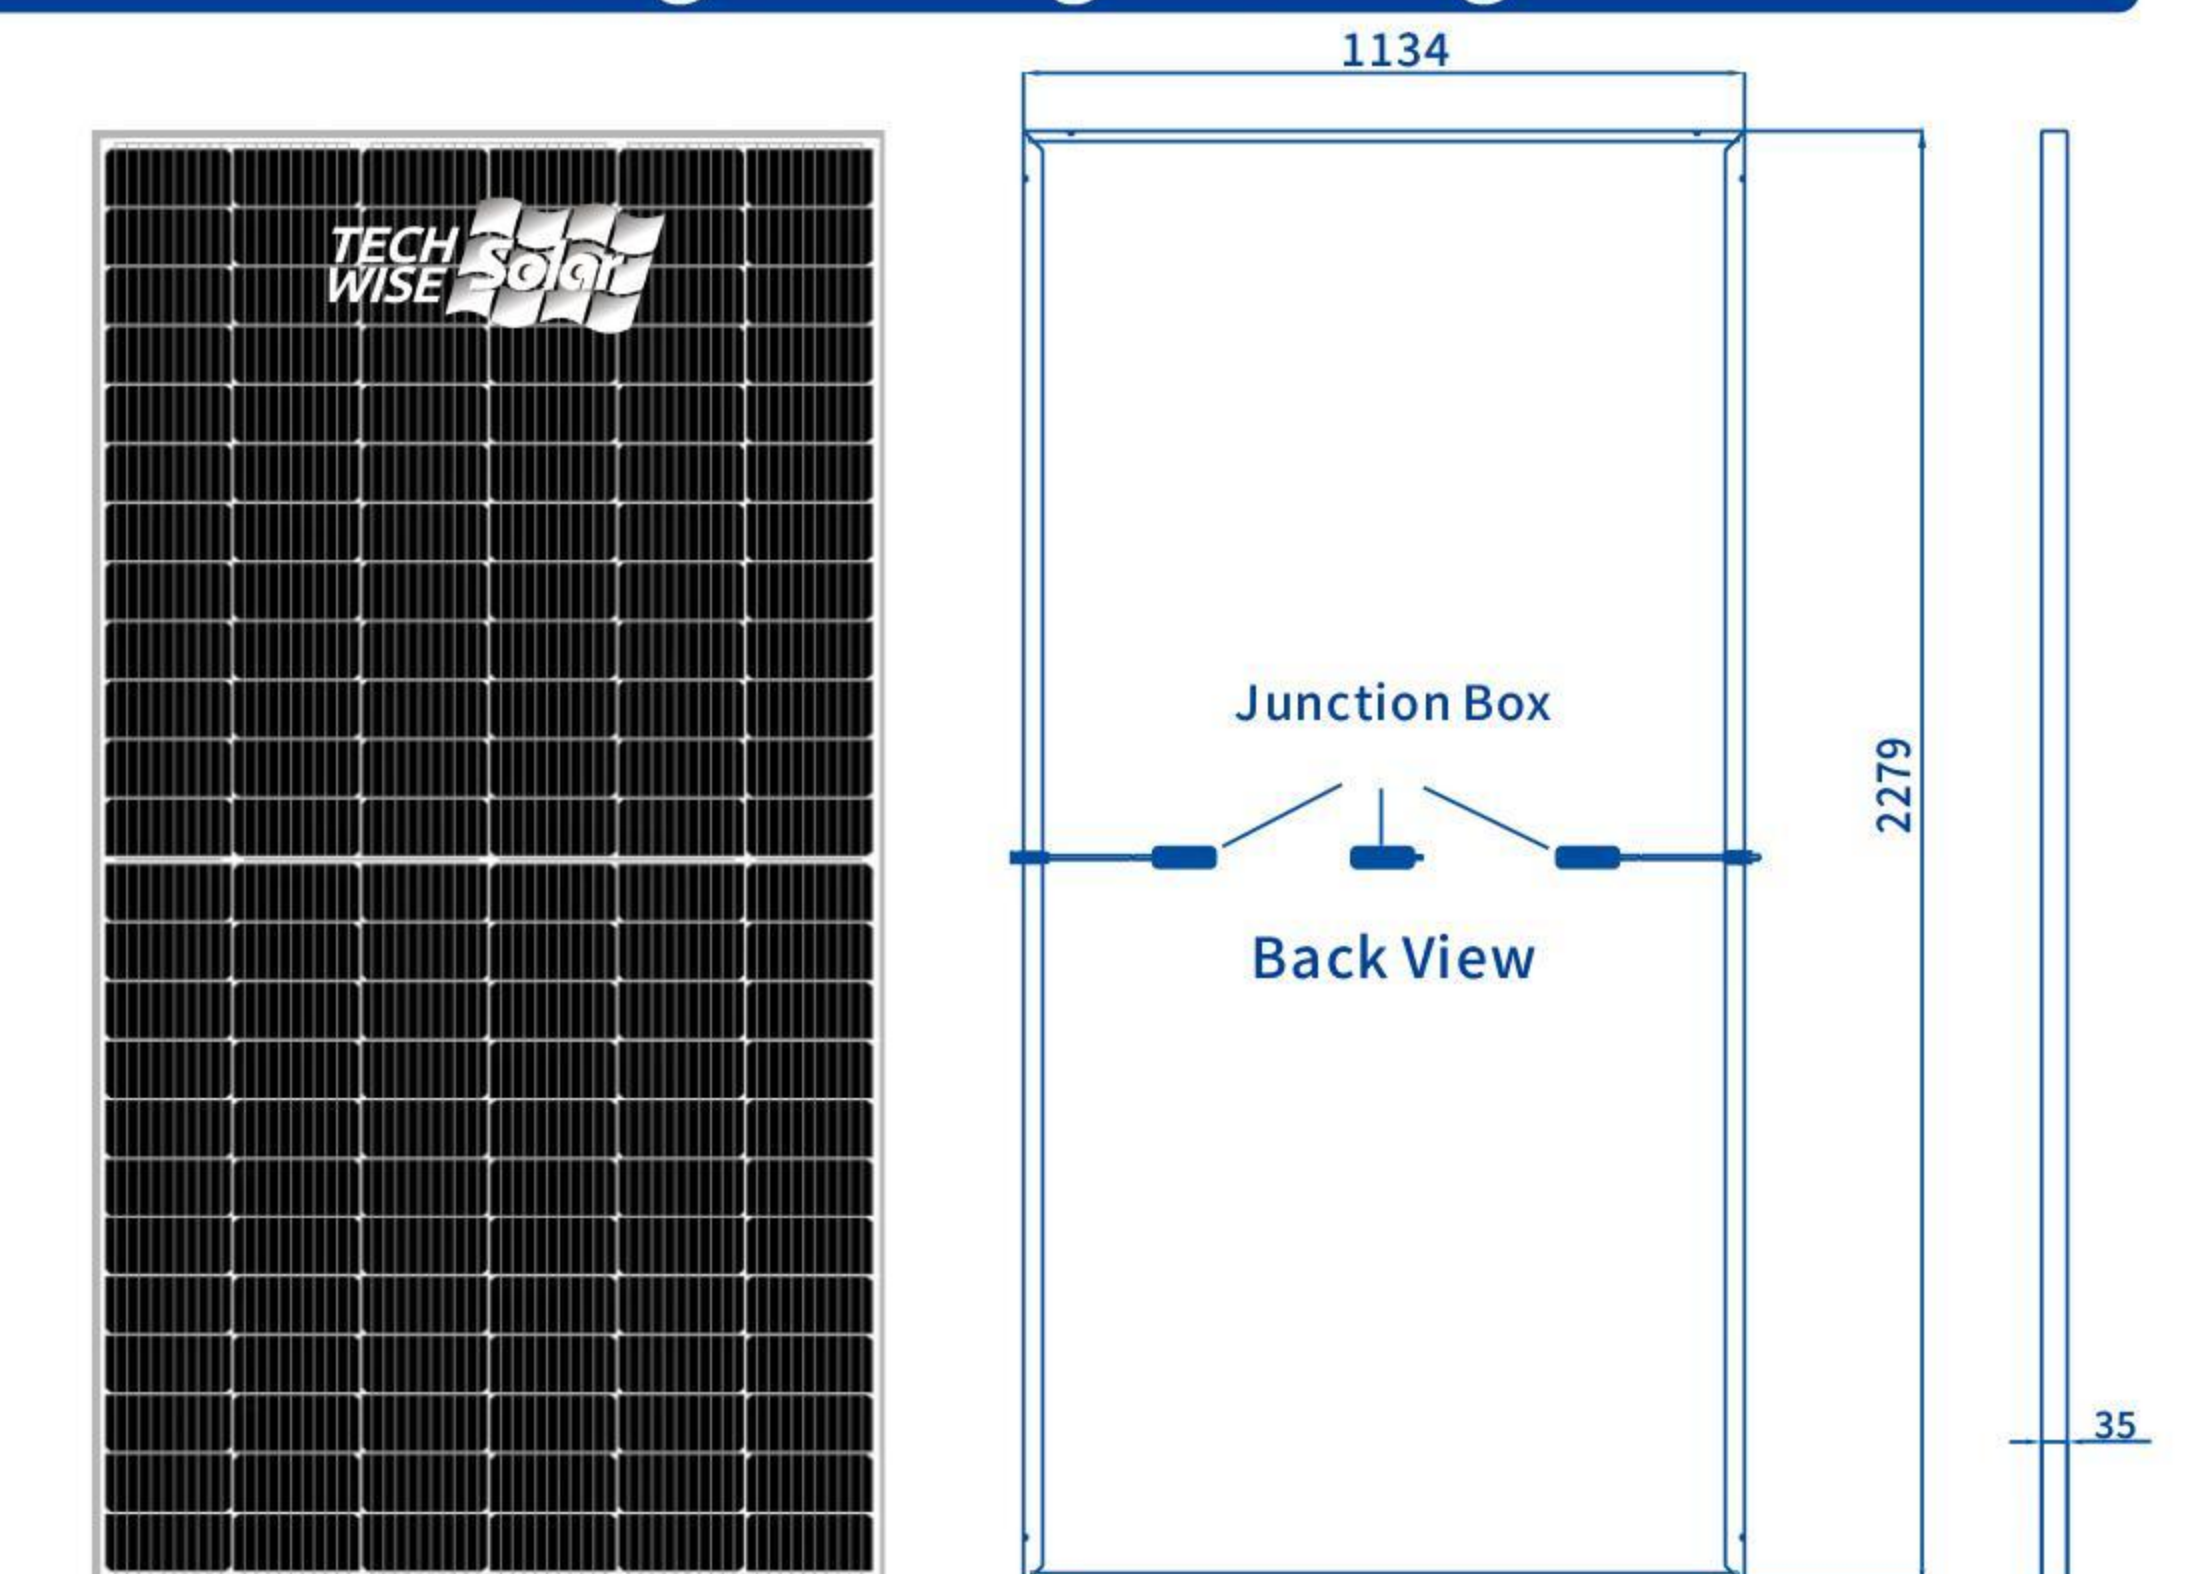

### • Electrical Characteristics •

#### STC standard performance >>>

Power Level	530	535	540	545	550	555
Pmax(W)	530	535	540	545	550	555
Vmp(V)	41.40	41.55	41.70	41.85	42.00	42.15
Imp(A)	12.81	12.88	12.95	13.03	13.10	13.17
Voc(V)	49.25	49.40	49.55	49.70	49.85	50.00
Isc(A)	13.73	13.79	13.85	13.91	13.97	14.02
Module Efficiency (%)	20.51	20.70	20.89	21.09	21.28	21.48

#### NOCT standard performance >>>

Power Level	530	535	540	545	550	555
Pmax(W)	401	405	409	412	416	420
Vmp(V)	38.48	38.67	38.89	39.14	39.28	39.45
Imp(A)	10.42	10.47	10.52	10.53	10.59	10.65
Voc(V)	46.16	46.28	46.40	46.59	46.80	47.01
Isc(A)	11.05	11.09	11.13	11.17	11.21	11.25



STC: Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM1.5

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

### • Temperature Characteristics •

Operating Temp (°C)	-40-85
Operating Humidity (%)	5-85
Hail Load Tolerance	25mm hailstone with velocity of 23m/s
Temp Coefficient (%/°C)	-0.350
Temp Coefficient Isc (%/°C)	0.05
Temp Coefficient Voc (%/°C)	-0.275
Operating Temp (°C)	44±2

### • I-V Curve •

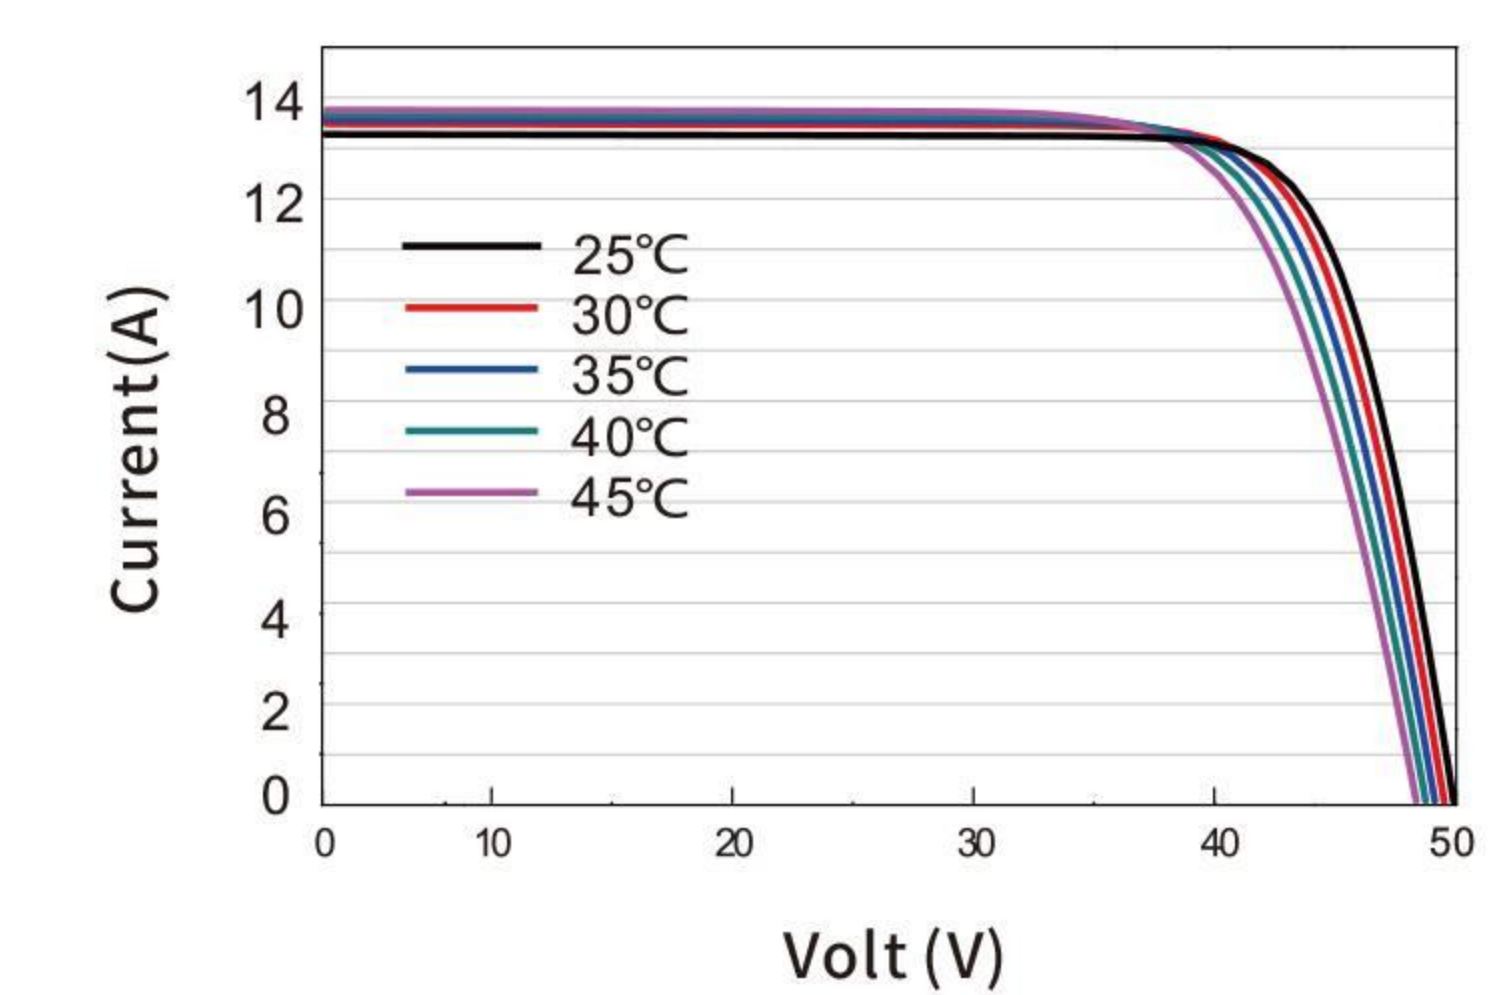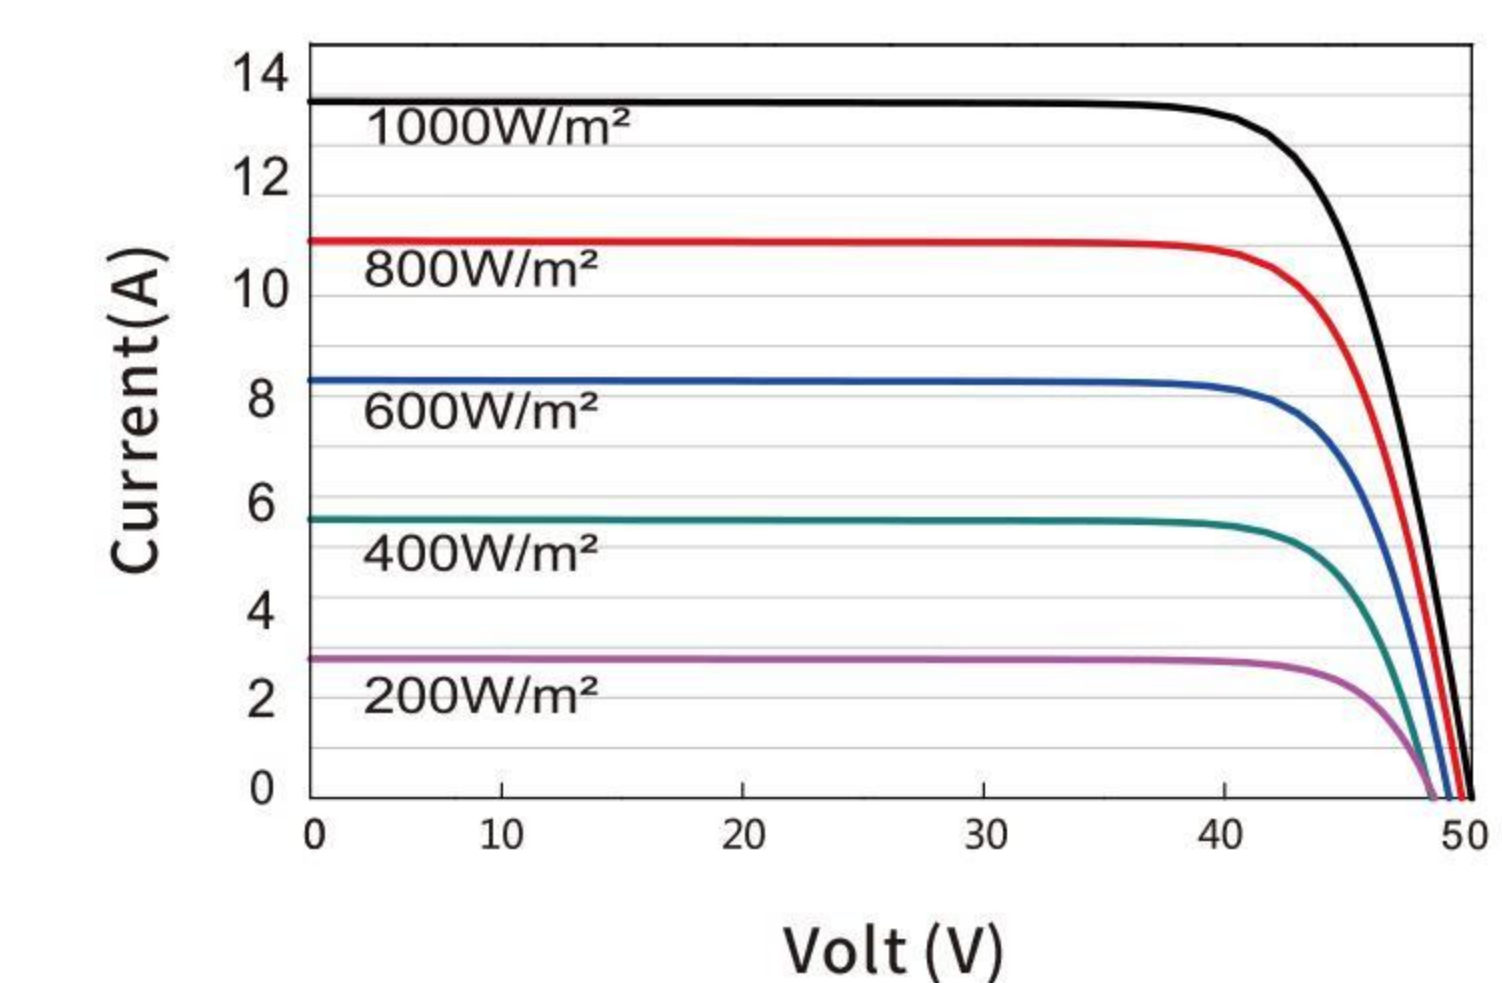

### • Packaging Info •

Pieces per Pallet	31
Size of Packaging (mm)	2305*1125*1270
Weight of per Pallet (kg)	862
Pieces per Container	620
Size of Container	40'HC



Add: No. 168, Group 8, Shangmanju, Caobu Town  
Rudong County, Nantong City, Jiangsu Province, China  
Tel: 86-513-69976081/81900128  
Web: www.techwisesolar.com  
Email: salesdept@techwisesolar.com

All data and specifications included in this brochure may subject to be modified without notice.  
All Rights reserved by TechWise Solar Co.  
(Sep 2025 V4 Edition)