




European Experts  
in Residential Modules

## Quartz TOPCon N-type

FRONT SIDE

# 125W

› Double Glass Bifacial

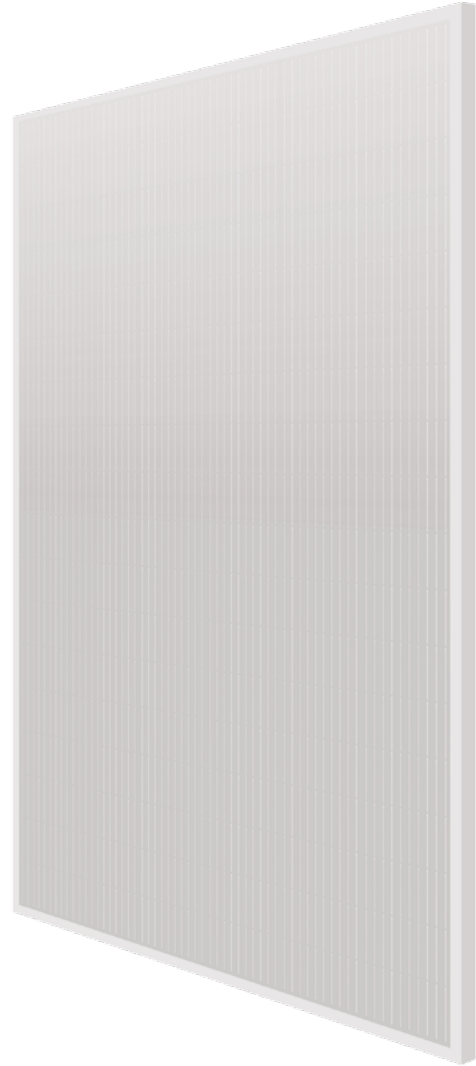

+20.0%

### Module efficiency

Module efficiency up to 6.26 %



### Colour RAL 9016

Perfect integration on demanding BIPV projects



### PID resistance

Certified according to IEC TS 62804 standards



### Bifacial cell

Bifaciality factor:  $80 \pm 5 \%$



### Sustainable product

High percentage of recyclable materials



### Easy to handle

Comfortable installation thanks to an optimized area size

European Quality



CE

UK  
CA



# 20 Years


Product Warranty

+5 years for Premium Partners



# 30 Years

Performance Warranty

Linear Warranty

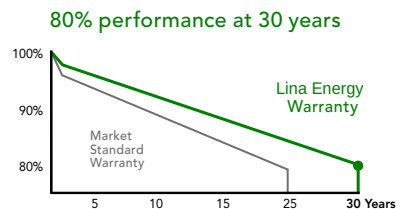

# LE MEPV — QUARTZ DG Bif 125W

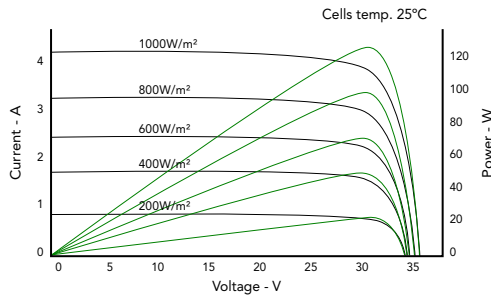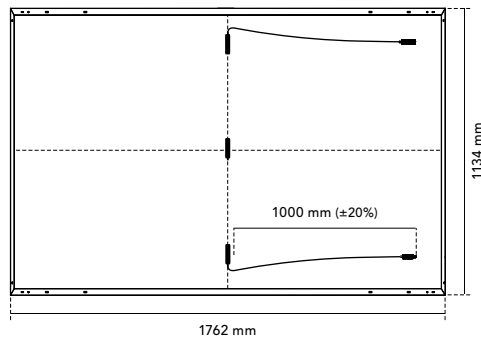

## Mechanical specification

Solar cells	N-Type bifacial monocrystalline silicon cells
Front Glass	2 mm anti-reflective surface tempered solar glass
Back Glass	2 mm tempered uncolored solar glass
Frame	Quartz anodized aluminium
Junction Box	IP68, 3 by-pass diodes
Connector	Original MC4-Evo 2
Cable	1000 mm (±20%) length and 4 mm² section
Dimension	1762 x 1134 x 30 mm (±1%)
Area	2.00 m²
Weight	25.5 kg

## Temperature coefficients

Temperature coefficient of Isc ( $\alpha$ )	0.05 %/°C
Temperature coefficient of Voc ( $\beta$ )	-0.28 %/°C
Temperature coefficient of Pmax ( $\gamma$ )	-0.29 %/°C
Temperature range	-40 °C ~ +85 °C
Nominal operating cell temperature (NOCT)	45 ± 2 °C

## MEPV 125

Electrical characteristics	STC	NOCT
Nominal power. Pmax	125 Wp	92 Wp
Short-circuit current (Isc)	4.50 A	3.56 A
Open-circuit voltage (Voc)	35.34 V	33.38 V
Maximum power current (Imp)	4.37 A	3.45 A
Maximum power voltage (Vmp)	28.62 V	26.80 V
Module efficiency	6.25 %	
Electrical characteristics	Bifacial gain 10%	
Nominal power. Pmax	138 Wp	
Short-circuit current (Isc)	4.95 A	
Open-circuit voltage (Voc)	35.34 V	
Maximum power current (Imp)	4.80 A	
Maximum power voltage (Vmp)	28.62 V	

\* STC: 1000 W/m², module temperature 25°C, AM 1.5

\* NOCT: 800 W/m², ambient temperature 20°C, AM 1.5

## Operating parameters

Maximum voltage	1500 V
Maximum series fuse rating. Ir	25 A
Power output tolerance	0 - +3 %
Voc and Isc tolerance	± 3 %
Fire rating	BROOF (t4) (EN 13501-5) Class A or C (UL 790)
Protection class	Class II (IEC 61140)
Mechanical loads	Front load 5400 Pa, Back load 2400 Pa

## Corporate and product certificates

ECOVADIS rating - Platinum Medal (TOP 1%)
Solar Industry Forced Labor Prevention Pledge by SEIA
ISO9001:2015 - Quality Management Systems
ISO14001:2015 - Environmental Management System
WEEE compliance in Germany
PV CYCLE Italy
IEC 61215 - Terrestrial photovoltaic (PV) modules - Design qualification and type approval
IEC 61730 - Photovoltaic (PV) module safety qualification
IEC 61701 - Photovoltaic (PV) modules - Salt mist corrosion testing
IEC 62716 - Photovoltaic (PV) modules - Ammonia corrosion testing
IEC TS 62804 - Photovoltaic (PV) modules - Test methods for the detection of potential-induced degradation
Hail resistance HW3/RG3
Certificate of Factory Production Control (UK) - MCS
Fire reaction class: 1 - LAPI
Swissolar Quality Certificate



NOTE: All information contained in this data sheet is provided for general information purposes only. Product specifications may be subject to technical modifications. Reception installation and use shall comply with the applicable Installation Manual, General Conditions of Sale and Warranty Terms and Conditions.



www.lina-energy.com  
info@lina-energy.com  
+359 893916630  
Izgrez 8000, Burgas  
Bulgaria

Crafting a brighter future

Since 2016, our primary focus has been on providing high-quality, durable photovoltaic module that enable us and future generations to sustainably generate clean energy for the preservation of our planet.