

Waterfall Pro

LANTE SOLAR

Powering Possibilities


LTS8-144DGNT

**N-type
Bifacial Dual Glass
Mono Module**

575 - 600W / Power Output

0~5W / Pmax Tolerance

23.23% / Maximum Module Efficiency

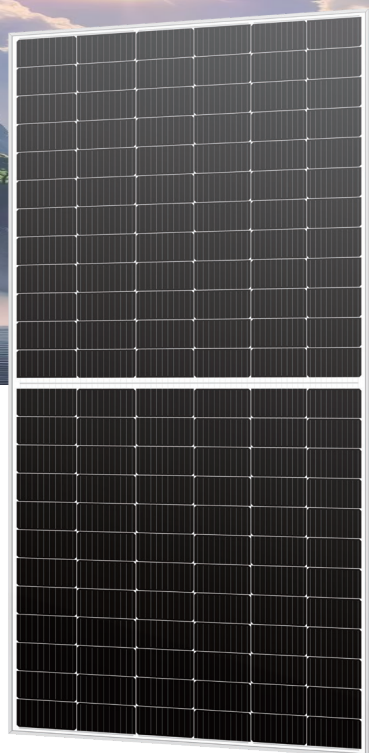

Outstanding Low Light Performance

Higher power output even under low-light environments like on cloudy or foggy days.



Better Temperature Coefficient

Higher power generation under working conditions, thanks to passivating contact cell technology



Lower LCOE

Higher bifaciality, higher power output and lower BOS cost



Wider Applicability

More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area



10%-30% Additional Power Generation

30 years lifespan brings 10%-30% additional power generation comparing with conventional P-type module



Zero LID (Light Induced Degradation)

N-type solar cell has no LID naturally which can increase power generation



PID Resistance


Excellent Anti-PID performance guarantee via optimized mass-production process and materials control



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)

Linear Performance Warranty

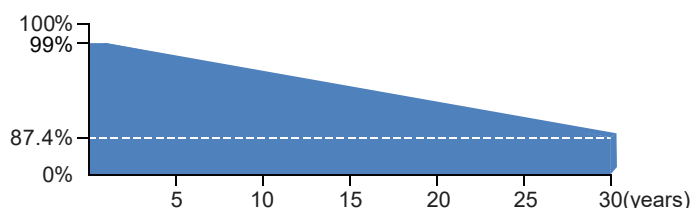

15 years

Product quality & process guarantee

30 years

Linear power guarantee

0.40 %

Annual degradation

Product Certification

ISO9001 : 2015: Quality Management System

ISO14001 : 2015: Environment Management System

ISO45001 : 2018: Occupational health and safety management systems

IEC61215, IEC61730, IEC62716



* Different markets have different certification requirements.

Also, the products are under rapid innovation.


Please confirm the certification status with regional sales representatives.

Waterfall Pro

LT575~600S8-144DGNT

Module Specification

Cell Type	144 [2 x (12 x 6)] / 182*91.875mm
Dimensions (mm)	2278*1134*30
Weight (kg)	32.5
Front Cover	2.0mm, Anti-Reflection Coating
Rear Cover	2.0mm, Heat Strengthened Glass
Junction Box	IP68 (3 diodes)
Cables	TUV 1x4.0mm ² , (+):300mm(-):300mm or Customized length
Connector Type	MC4-EVO2 / MC4 compatible

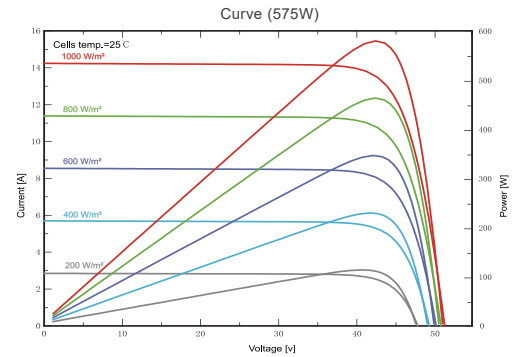

Electrical Specifications

Module Type	LT575S8-144DGNT		LT580S8-144DGNT		LT585S8-144DGNT		LT590S8-144DGNT		LT595S8-144DGNT		LT600S8-144DGNT	
	STC ¹	NOCT ²	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	575	435	580	439	585	442	590	446	595	450	600	454
Maximum Power Current (Imp/A)	13.47	10.84	13.54	10.89	13.60	10.95	13.67	11.00	13.73	11.06	13.80	11.12
Maximum Power Voltage (Vmp/V)	42.69	40.13	42.84	40.25	43.02	40.40	43.17	40.53	43.34	40.67	43.49	40.81
Short-circuit Current (Isc/A)	14.24	11.49	14.30	11.54	14.36	11.58	14.42	11.63	14.48	11.68	14.54	11.72
Open-circuit Voltage (Voc/V)	51.23	48.83	51.43	49.02	51.63	49.21	51.83	49.40	52.03	49.59	52.23	49.78
Module Efficiency (%)	22.26		22.45		22.65		22.84		23.03		23.23	

¹ STC: Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5
² NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Electrical Specifications(BNPI¹)

Nameplate Power (W)	575	580	585	590	595	600
Maximum Power (Pmax/W)	627	632	638	643	649	654
Maximum Power Current (Imp/A)	14.68	14.76	14.82	14.90	14.97	15.04
Maximum Power Voltage (Vmp/V)	42.69	42.84	43.02	43.17	43.34	43.49
Short-circuit Current (Isc/A)	15.52	15.59	15.65	15.72	15.78	15.85
Open-circuit Voltage (Voc/V)	51.23	51.43	51.63	51.83	52.03	52.23

¹ BNPI: Front radiation 1000W/m², Rear radiation 135W/m², Module temperature 25°C, AM=1.5

Temperature Characteristics


Nominal Operating Cell Temperature (NOCT/°C)	42±2
Temperature Coefficient of Pmax (%/°C)	-0.310
Temperature Coefficient of Voc (%/°C)	-0.26
Temperature Coefficient of Isc (%/°C)	+0.046

Packaging

Container	20GP	40HQ
Pallet Dimensions (mm)	2315*1142*2070	2315*1120*1258
Pieces per Pallet	56	36
Pieces per Container	280	720

Operating Conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC (IEC)
Overcurrent Protection Rating (A)	30
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 2400

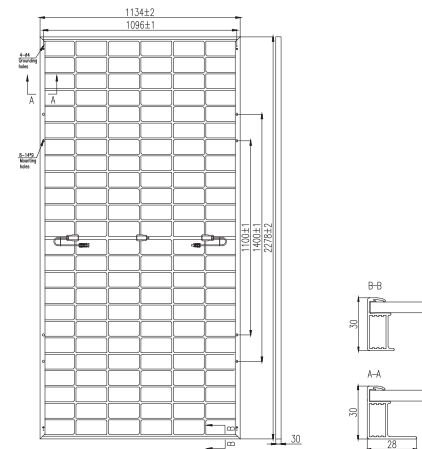

LANTE SOLAR LIMITED
Factory Address: No.1, Longmen road, Wujin Hi-tech Industrial Zone, Changzhou, Jiangsu, China
Hong Kong head office : Unit 505,5/F, King's Commercial Building, 2-4 Chatham Court, Tsim Sha Tsui, Kowloon, Hong Kong
E-mail: sales@lantesolar.com **Website:** www.lantesolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
 © 2025 Lante Solar All rights reserved. Contents included in this datasheet are subject to change without notice.
 No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.