


# BiDrive UltraMax Series

## TSBHM-120HSG 590-600

### **Ultra High Efficiency Bifacial Mono PERC Half-cell Solar Module (210)**

#### **ABOUT BEYONDSUN**

Founded in 2008, Beyondsun is the world's leading PV manufacturer and one-stop solution provider. With multiple manufacturing bases and more than 8 branches around the world, our business covers cells, modules, aluminum frame and PV projects. With its advantages of continuous technological innovation, strong financial performance, and well-established global sales and service networks, Beyondsun has been highly recognized by its global partners. Until now, Beyondsun has distributed more than 8 GW PV products to over 30 countries all over the world. We are committed to collaborate with our partners in driving renewable energy together.

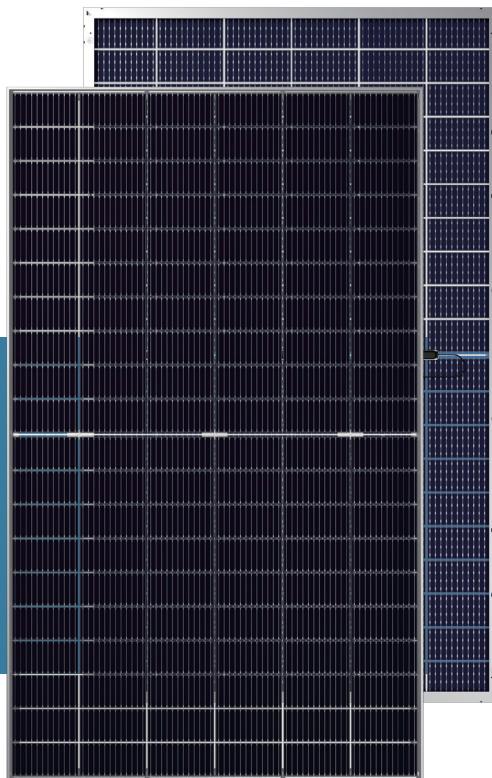

#### **ULTRA HIGH MODULE EFFICIENCY**

More power output with 210 MBB mono PERC half-cut cell



#### **MORE ENERGY YIELD**

Bifacial cell, additional 5%-30% more energy yield from rear side



#### **LOWER OPERATING TEMPERATURE, MORE RELIABLE**

Lower operating temperature and hot spot temperature during the sunny day, making the module prevail during the sunny days



#### **BETTER SHADING TOLERANCE**

Thanks to paralleling circuit design, more power generated under shading condition and during morning & evening time



#### **BETTER MICRO CRACK RESISTANCE**

Minimize the impact by micro crack by limiting cell damage and potentially extending area by half-cut module architecture



#### **1500V SYSTEM VOLTAGE**

Approved IEC1500Vdc system voltage, saving on BoS cost

#### **QUALIFICATIONS & CERTIFICATES**

- IEC 61215 / IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- OHSAS 18001: Occupational Health and Safety




#### **INDUSTRY LEADING WARRANTY**

30-Year Linear Performance Warranty

12-Year Product Material & Workmanship Warranty

LLOYDS Product & Performance Insured by LLOYD'S

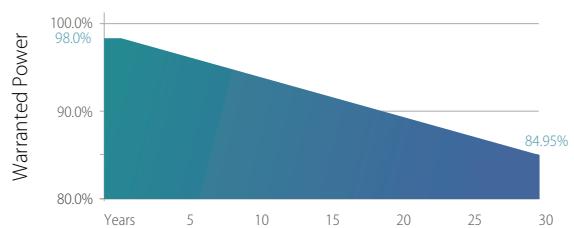

#### **THE IDEAL SOLUTION FOR**



Ground-mounted projects



Commercial / industrial rooftop projects

# BiDrive UltraMax Series TSBHM-120HSG 590-600

## ELECTRICAL PARAMETERS

| Module Type                   | TSBHM590-120HSG |       | TSBHM595-120HSG |       | TSBHM600-120HSG |       |
|-------------------------------|-----------------|-------|-----------------|-------|-----------------|-------|
| Test Condition                | STC             | NMOT  | STC             | NMOT  | STC             | NMOT  |
| Max. Power Output Pmax (W)    | 590             | 443   | 595             | 447   | 600             | 451   |
| Power Tolerance               | 0~+3%           | 0~+3% | 0~+3%           | 0~+3% | 0~+3%           | 0~+3% |
| Max. Power Voltage Vmp (V)    | 34.47           | 32.11 | 34.66           | 32.28 | 34.85           | 32.47 |
| Max. Power Current Imp (A)    | 17.12           | 13.80 | 17.17           | 13.85 | 17.22           | 13.89 |
| Open Circuit Voltage Voc (V)  | 40.93           | 38.91 | 41.11           | 39.08 | 41.29           | 39.25 |
| Short Circuit Current Isc (A) | 18.36           | 14.81 | 18.41           | 14.85 | 18.46           | 14.89 |
| Module Efficiency (%)         | 20.85%          |       | 21.02%          |       | 21.20%          |       |

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C, Air Mass 1.5

\*NMOT (Nominal Module Operating Temperature), Irradiance of 800W/m<sup>2</sup>, Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

## REAR SIDE POWER GAIN

|     |                           |        |        |        |
|-----|---------------------------|--------|--------|--------|
| 5%  | Maximum Power (Pmax)      | 620    | 625    | 630    |
|     | Module Efficiency STC (%) | 21.89% | 22.08% | 22.26% |
| 15% | Maximum Power (Pmax)      | 679    | 684    | 690    |
|     | Module Efficiency STC (%) | 23.97% | 24.18% | 24.38% |
| 25% | Maximum Power (Pmax)      | 738    | 744    | 750    |
|     | Module Efficiency STC (%) | 26.06% | 26.28% | 26.50% |

## TEMPERATURE COEFFICIENTS

|                                 |             |
|---------------------------------|-------------|
| Temperature Coefficients of Pmp | -0.36%/°C   |
| Temperature Coefficients of Voc | -0.29%/°C   |
| Temperature Coefficients of Isc | +0.048 %/°C |
| NMOT                            | 42°C±3°C    |

## MECHANICAL PARAMETERS

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| Cell Type                | Mono, 210x105mm                                                 |
| Cell Arrangement         | 120pcs 2x(6x10)                                                 |
| Dimension (LxWxH)        | 2172x1303x35mm                                                  |
| Weight                   | 35.3kg                                                          |
| Front Cover / Back Cover | 2.0mm AR Coating Tempered Glass / 2.0mm Heat Strengthened Glass |
| Frame                    | Anodized Aluminium Alloy                                        |
| Junction Box             | IP68, 3 bypass diodes                                           |
| Cable                    | 4mm <sup>2</sup> solar cable, 450mm (customizable)              |
| Connector                | PV Connector                                                    |



## OPERATING PARAMETERS

|                                |           |
|--------------------------------|-----------|
| Maximum System Voltage(V)      | 1500(DC)  |
| Operating Temperature(°C)      | -40~+85   |
| Max. Wind Load / Snow Load(Pa) | 2400/5400 |
| Max. Over Current(A)           | 25        |
| Application Class              | Class A   |
| Fire Rating                    | Class A   |


## PACKAGE INFORMATION

|                   |                     |
|-------------------|---------------------|
| Quantity / Pallet | 31 pcs              |
| Container 40'HQ   | 17 pallets, 527 pcs |

## I-V CURVES

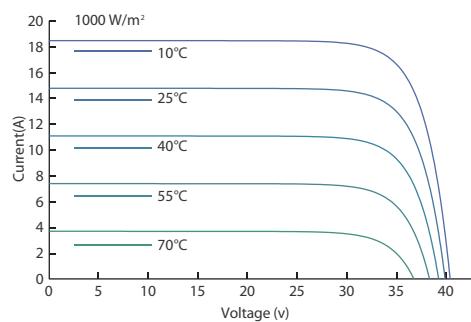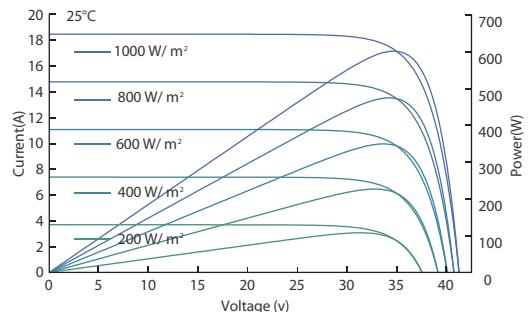

## TECHNICAL DRAWINGS

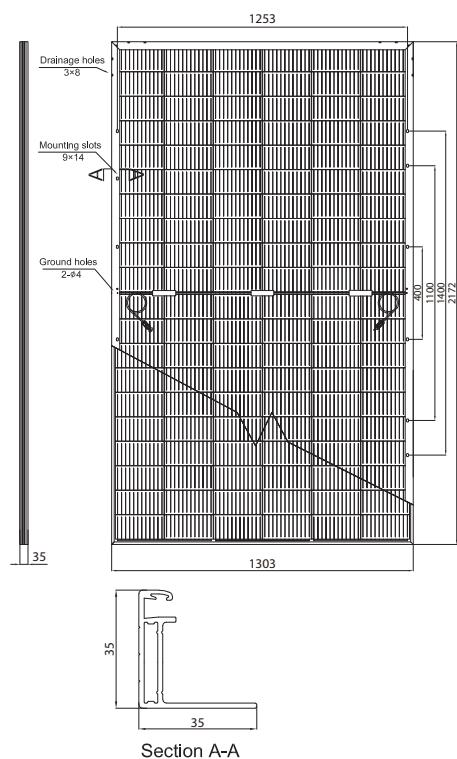

\*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Zhejiang Beyondsun Green Energy Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.