


365~400W

**High Efficiency Low
LID Mono PERC with
MBB & Half-cut Technology**

Quality Guarantee

15-year Warranty for Materials and Processing
25-year Warranty for Extra Linear Power Output

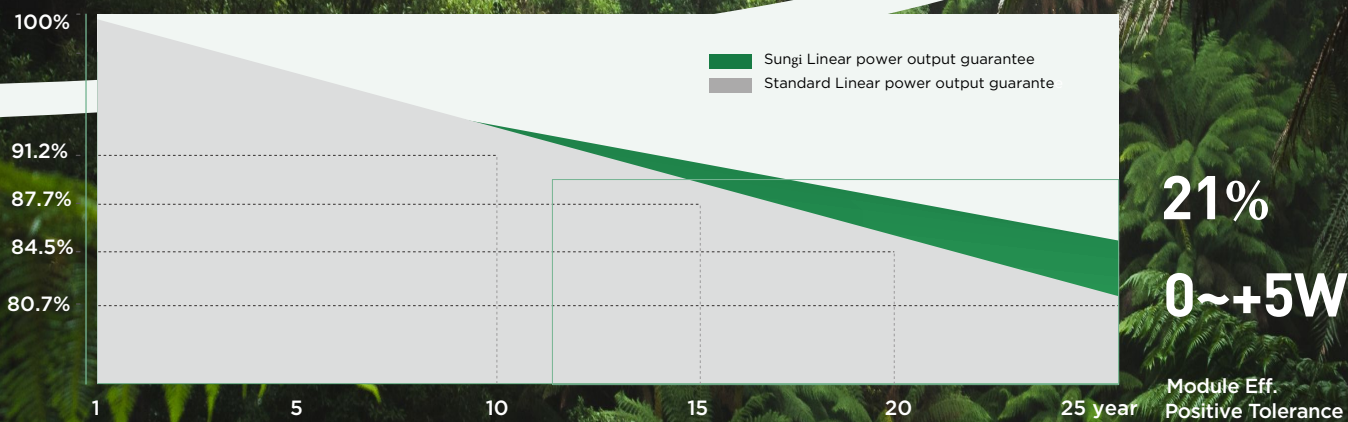

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730
ISO 9001:2008: ISO Quality Management System
ISO 14001:2004: ISO Environment Management System
OHSAS 18001:2007 Occupational Health and Safety



* Specifications subject to technical changes and tests. Sungi Solar reserves the right of interpretation.

Positive power tolerance (0 +5W) guaranteed

High module conversion efficiency (up to 21.0%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current



365~400W

Design (mm)



*Units: mm *Tolerance: ±2mm

Cell Orientation	120 (6x20)
Junction Box	IP68, three diodes
Output Cable	4mm ² , 300mm in length, length can be customized
Glass	Single glass 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight:	19.5kg
Dimension	1755x1038x35mm
Packaging	30pcs per pallet 180pcs per 20'GP 780pcs per 40'HC

Operational Temperature	-40°C~+85°C
Power Output Tolerance	0~+5W
Voc & Isc Tolerance	±3%
Max. System Voltage	DC1000V(IEC/UL)
Max. Series Fuse Rating	20A
NOCT	45±2°C
Safety Class	II
Fire Rating	UL type 1 or 2
Max. Static Load(Front)	5400Pa
Max. Static Load(Back)	2400Pa

Electrical Characteristics

Model Number	365M-60H		370M-60H		375M-60H		380M-60H		385M-60H		400M-60H	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	365	276	370	280	375	284	380	287	385	291	400	300
Open Circuit Voltage (Voc/V)	41.13	38.41	41.30	38.65	41.45	38.89	41.62	39.14	41.78	39.38	41.94	39.63
Short Circuit Current (Isc/A)	11.30	9.15	11.35	9.20	11.41	9.25	11.47	9.30	11.53	9.35	11.58	9.40
Voltage at Maximum Power (Vmp/V)	33.96	32.05	34.23	32.30	34.50	32.55	34.77	32.72	35.04	32.96	35.33	33.20
Current at Maximum Power (Imp/A)	10.75	8.61	10.81	8.66	10.87	8.71	10.93	8.78	10.99	8.83	11.04	8.88
Module Efficiency(%)	19.6		19.9		20.2		20.4		20.7		21.0	
Temperature Coefficient of Isc	+0.044%/°C											
Temperature Coefficient of Voc	-0.272%/°C											
Temperature Coefficient of Pmax	-0.350%/°C											


* STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25°C, Spectra at AM1.5

* NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s


* Test uncertainty for Pmax: ±3%

I-V Curve

Current-Voltage Curve(400M-60H)

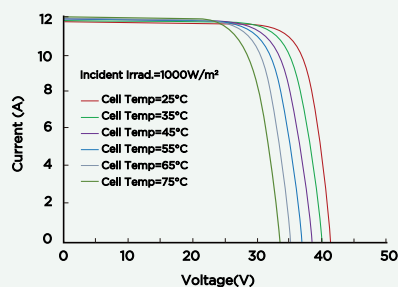

Power-Voltage Curve(400M-60H)

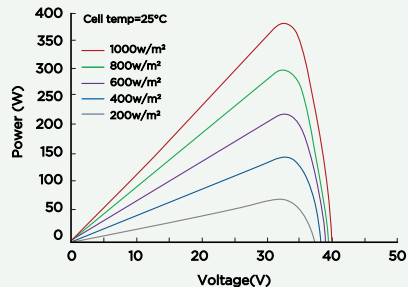

Current-Voltage Curve(400M-60H)

