

NPA240S-12H

Monocrystalline Module

40 Cell

Monocrystalline Module

240W


Power Output

22.9%

Maximum Efficiency

5%

Positive Tolerance

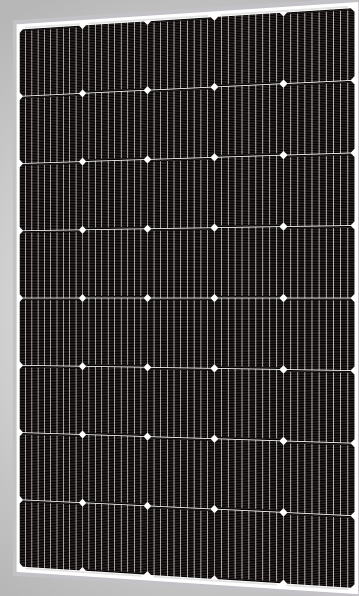

High Efficiency

Module Efficiency improved through advanced cell technology and manufacturing capabilities



High Performance Cost Ratio

Provide industry advanced cell technology and qualified materials at affordable prices



Efficient Sorting Process

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage




Highly Reliable

Solid encapsulation and diffusion barriers provides long term protection against PID damage, built to handle 5,400 Pa of front load, rear side 2,400Pa, Hailstone Test at 1.375 inches in diameter falling at terminal velocity through the sky.

Product Certificate	IEC 61215, IEC 61730
Mangement Certificate	ISO 9001: 2016
Other certificate	Fire Rating Class C, TÜV Rheinland
Positive mechanical load	>5400Pa
Positive Power Tolerance	0~+5W
Warranty	25-year Linear Power Warranty

Performance Warranty

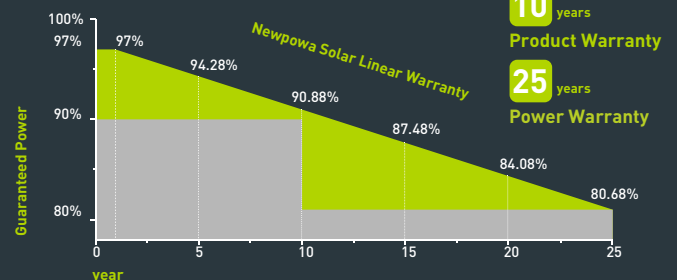

ELECTRICAL CHARACTERISTICS


Type	NPA240S-12H
Power Output(W)	240W
Voltage MPP Vmp(V)	23.32V
Current MPP Imp(A)	10.16A
Voltage Open Circuit Voc(V)	27.08V
Short Circuit Current Isc(A)	10.71A
Temperature Coefficient Of Voc	-[80±10]mV/°C
Temperature Coefficient Of Isc	[0.065±0.015]%/°C
Temperature Coefficient Of Power	-[0.5±0.05]%/°C
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C

STC: 1000W/m² Irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3

MECHANICAL CHARACTERISTICS

Cells	Monocrystalline Silicon
Solar Cells Grade	Class A High Efficiency
Module Dimension(mm/in.)	1390[54.72]x875[34.45]x35[1.38]
Weight(kg/lbs)	13.21[29.12]
Packing Information(mm/in.)	1440[56.69]x925[36.42]x63[2.48]/(1 pcs/ctn)

I-V CURVES (Irradiance: AM1.5, 1km/m²)

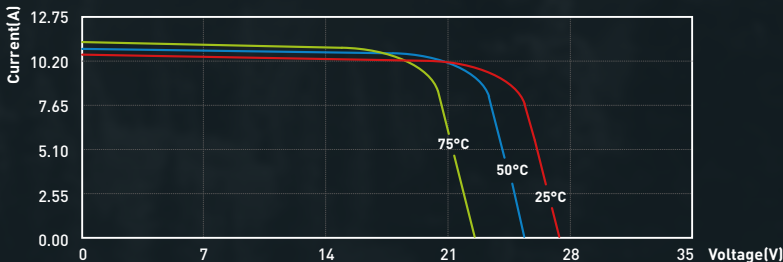

*Specifications subject to technical changes and tests.
NEWPOWA reserves the right of final interpretation.

