

10% transmittance mono-crystal modules-72 cells

10%透光单晶组件—72片



### 结构参数

## Mechanical Specifications

Parameter/参数	Value/数值
Cell Type/电池类型	Mono crystalline/单晶硅 (156mm*156mm)
Solar Cells/电池片数量[片]	72(6*12)
Length*Width*Thickness/长*宽*厚[mm]	1968*992*6
Weight/重量[Kg]	27.0
Front Glass/前板玻璃[mm]	2.5 ( Low iron semi tempered coated glass/低铁压花半钢化镀膜玻璃 )
Interlayer/中间层[mm]	EVA/POE/PVB
Back Glass/背板玻璃[mm]	2.5 ( Float semi tempered glass/浮法半钢化玻璃 )
Junction Box/接线盒	IP67 Rated, 3 by-pass diodes /3个旁路二极管, 满足IP67安全防护等级
Connector/连接器	Multi-Contact MC-4(or equivalent)/MC-4连接器 ( 或同类产品 )
Transmittance/透光率[%]	10
Maximum Load Capacity/机械负载[Pa]	2400(风压)/5400(雪压)

### 电学性能

## Electrical Characteristics

Parameter/参数		DM72-320	DM72-325	DM72-330	DM72-335
STC : 光谱 AM1.5, 辐照度 1000W/m <sup>2</sup> , 电池温度25°C	Maximum Power at STC [Pmax]/标测下最大功率 [W]	320	325	330	335
	Open Circuit Voltage [Voc]/开路电压 [V]	45.50	45.90	46.40	46.90
	Short Circuit Current [Isc]/短路电流 [A]	9.01	9.07	9.10	9.14
	Voltage at Maximum Power point[Vm]/最大功率点电压 [V]	37.35	37.75	37.98	38.25
	Current at Maximum Power point[Im]/最大功率点电流 [A]	8.57	8.61	8.69	8.76
	Power Tolerance /功率偏差 [%]	0~+3%			
	Module Efficiency/转换效率 [%]	16.3	16.6	16.9	17.1
NOCT : 光谱 AM1.5, 辐照度 800W/m <sup>2</sup> , 环境温度20°C, 风速1m/s	Maximum Power at NOCT [Pmax]/NOCT下最大功率 [W]	234	238	241	244
	Open Circuit Voltage [Voc]/开路电压 [V]	42.72	42.95	43.00	43.15
	Short Circuit Current [Isc]/短路电流 [A]	7.15	7.18	7.22	7.25
	Voltage at Maximum Power point[Vm]/最大功率点电压 [V]	34.25	34.28	34.50	34.70
	Current at Maximum Power point[Im]/最大功率点电流 [A]	6.84	6.92	6.99	7.03
	Power Tolerance /功率偏差 [%]	0~+3%			

### 工作范围

## Scope of Work

Parameter/参数	Unit / 单位	Value/数值
Maximum System Voltage /最大系统电压	[V]	1000 DC(IEC)或1500 DC(IEC)
Operating Temperature /工作温度范围	[°C]	-40~85
Nominal Operating Cell Temperature/额定电池工作温度	[°C]	45±3
Maximum rated current/最大保险丝额定电流	[A]	15

### 温度系数

## Temperature Coefficients

Parameter/参数	Unit / 单位	Value/数值
Temperature Coefficient of Pmax/最大功率温度系数	[%/°C]	-0.42
Temperature Coefficient of Voc/开路电压温度系数	[%/°C]	-0.33
Temperature Coefficient of Isc/短路电流温度系数	[%/°C]	0.04


### 包装信息

## Package Configuration

Package Size	Container	20'GP	40'GP	40'HQ
2120×1150×1160mm	pieces for pallet	30	30	30
	pallets for Container	5	11	22
	pieces for Container	150	330	660

### 结构视图

## Module Layout

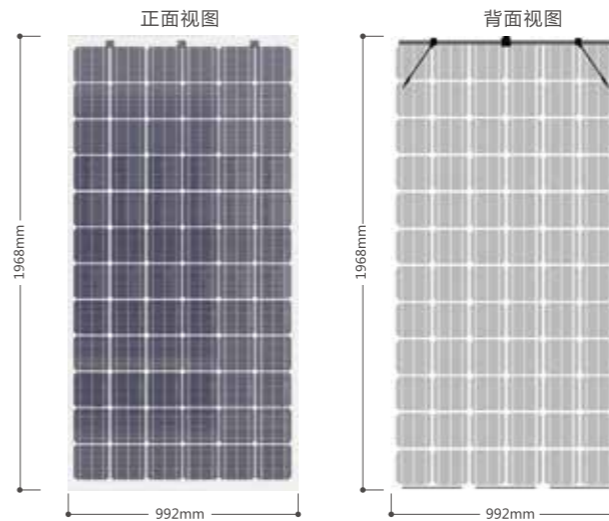


### 总装图

## Components

Front Glass ( 2.5mm Low iron semi tempered coated glass )
Encapsulant ( EVA/POE/PVB )
Cell Type ( Mono crystalline 156mm×156mm )
Encapsulant ( EVA/POE/PVB )
Back Glass ( 2.5mm Float semi tempered glass )

### 曲线图

## Electrical curves

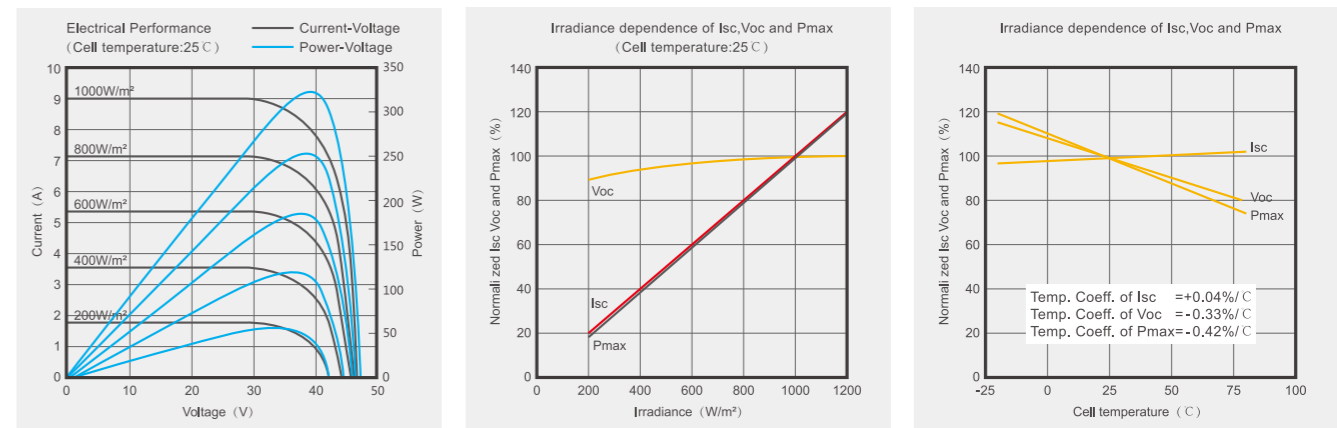

### 输出功率线性质保

### 业内领先的线性质保

### 认证标识

Certification

