Up to 375 watt









WST-MG GEMINI

370-375 W / 120 Cells



Stable long term investmentReliability you can bank on for 25 years




Advanced cell technology
Better performance in any weather



High-density module technologyHalf cell and multi-busbar design to increase power yield



Improved temperature performance
Reduced internal resistance and module degradation

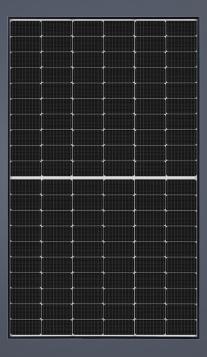

Greater Value

Premium quality from solar module specialists

A solar system is a long term investment, which should last for over 20 years. You want to be able to trust that the solar panels you install will perform for their whole life. WINAICO specialises in premium quality solar that you can rely on.

Greater Customer Satisfaction

Thousands of satisfied system owners worldwide

Established in 2008 WINAICO is one of the world's oldest solar manufacturers. Since inception we have focused on building close relationship with our customers. WINAICO stands for quality, reliability and customer engagement, values we apply every day in our business. Working closely with our customers builds trust and understanding, a feeling shared by thousands of satisfied customers worldwide.

Greater Protection

3 in 1 insurance for your complete system

Photovoltaic modules from WINAICO are characterised by outstanding quality, innovative design, durability and safety. In order to protect your system against property damage, operational interruption and reduced yields, we offer comprehensive all-round protection for your complete photovoltaic system when purchasing WINAICO modules.

Ask your installer to check if you qualify for free complimentary insurance.



WINAICO is one of the few manufacturers to be awarded the EUPD Research "Top Brand PV" seal. The award centres around customer satisfaction from the performance of their solar systems in the real world. The EUPD Seal reflects WINAICO's customer focus and the positive consensus on lifetime performance.




Greater Durability Reliable Long Term Investment

WINAICO's solar panels are designed to last for a long time. They are backed by industry-leading 25-year product warranty to give you reliable and consistent returns.



WINAICO combines half cell, multi-busbar and reflective wire designs to maximise efficiency and reduce internal resistance. The result is higher energy yield and lower module degradation.

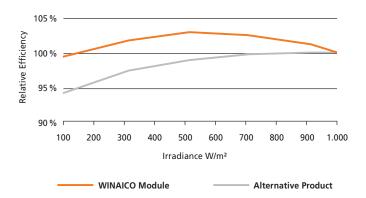



Greater Safety Tested to the Limits


WINAICO's modules are tested above and beyond international standards. Aiming to use lab conditions to simulate 25 years of service life, we push our modules to withstand conditions far above what they will likely experience on your roof. Be confident that your WINAICO panels will last the test of time.



Greater Quality Control 100% Inspection

We examine all cells and finished laminates for internal damage with a special electroluminescence test. In doing so, we can virtually eliminate all micro-cracks, hot spots, solder defects and other faults that cannot be seen with the naked eye. A type of "X-ray image" proves the 100% cell quality for each individual module, ensuring every WINAICO product is ready to perform on your roof.

Beyond Industry Standard Testing

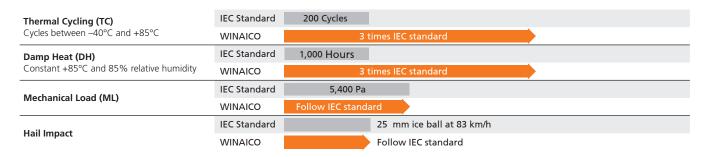

We test beyond the Industry testing standards because at WINAICO we believe that our customers deserve complete peace of mind.

Mechanical Data WINAICO WST-MG GEMINI

Monocrystalline silicon cells Quantity of cells 6 strings x 20 cells Dimensions 1,759 x 1,034 x 35 mm . (69.25 x 40.71 x 1.38 in) 20.6 kg (45.4 lbs) Weight Glass thickness 3.2 mm (0.13 in) Frame Black anodised aluminium Junction box IP 68 Connector type MC4 IP 68 Type 4

WINAICO PERFORMANCE GUARANTEE

Module fire performance

Fire safety class

At least 98% of nominal power during the first year. No more than 0.53% degradation per year from 2nd year to 25th year. The output power will be at least 85.28% at the end of 25th year.

WINAICO PRODUCT WARRANTY

In order to activate our 25-year product warranty, please register your installation under https://www.winaico.com/warranty-registration/

Operating conditions	WINAICO WST-MG
Operating temperature	-40°C to +85°C / -40°F to +185°F
Maximum system voltage IEC/UL	1,000 V/1,000 V
Maximum series fuse	20 A
Maximum design load (push/pull)	3,600 Pa/1,600 Pa
Maximum test load (push/pull)	5,400 Pa/2,400 Pa
Nominal module operating temperature NMOT	43.85 ± 3°C
Temperature coefficient of P_{MAX}	−0.35 %/°C
Temperature coefficient of V _{oc}	−0.28 %/°C
Temperature coefficient of I_{sc}	0.04 %/℃
Certifications	IEC 61215-1:2016, IEC 61215-2:2016, IEC 61730-1:2016, IEC 61730-2:2016

Electrical data (STC)		WST-375MG	
Nominal performance	P_{MAX}	375	Wp
Voltage at maximum performance	V_{MP}	34.46	V
Current at maximum performance	I _{MP}	10.95	Α
Open circuit voltage	V_{oc}	41.08	V
Short circuit current	I_{sc}	11.47	Α
Module efficiency		20.62	%
Power tolerance		-0/+5	

Electrical data applies under standard test conditions (STC): solar radiation 1,000 W/m² with light spectrum AM 1.5, with cell temperature 25 °C. Measurement tolerance of P_{MAX} at STC: ±3%. Accuracy of other electrical data: ±10%.

Electrical data (NMOT)		WST-375MG	
Nominal performance	P _{MAX}	273	Wp
Voltage at maximum performance	V_{MP}	31.66	V
Current at maximum performance	I _{MP}	8.63	Α
Open circuit voltage	V _{oc}	38.70	V
Short circuit current	I _{sc}	9.07	А

Electrical data applies under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.



