




# 315-330W

Bifacial  
Solar cell


20.0%  
Max efficiency

30 years  
Warranty

2 mm+2 mm  
Thickness


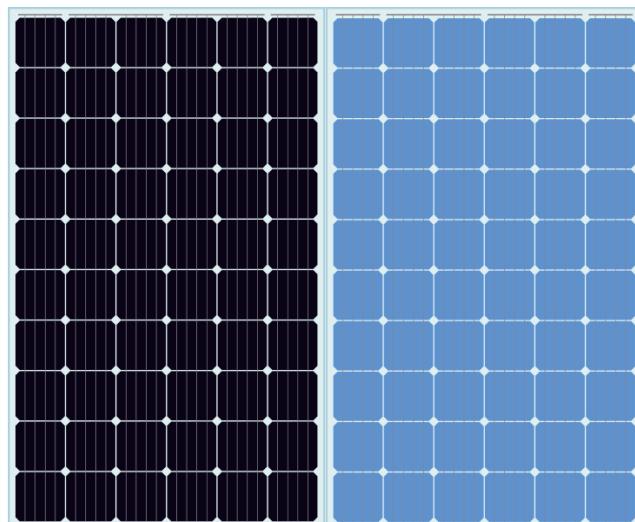


## Dual-glass solar module linear warranty

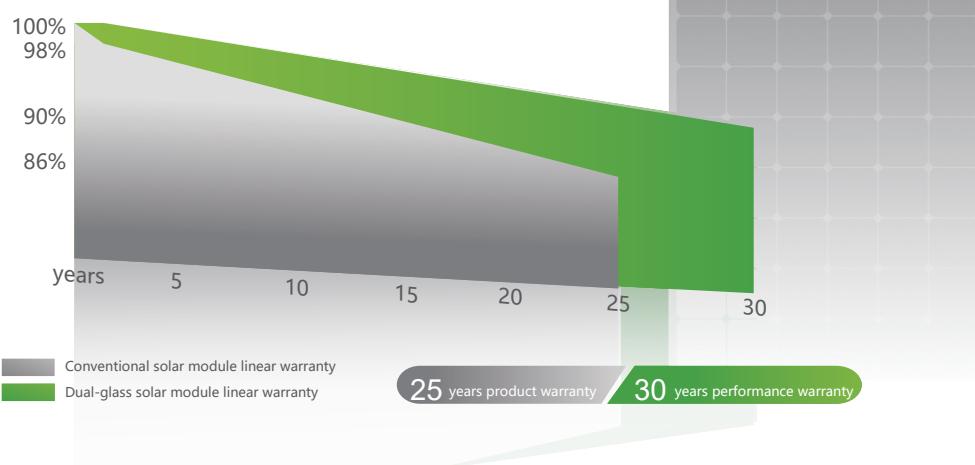


-  Power generated on both sides, up to 30% yield increasing
-  Assemble with thinner and lighter glass in only 2mm
-  Great heat dissipation by replacing backsheet with glass to increase power generation
-  PID free by frameless design
-  Fully symmetrical structure to prevent micro crack
-  Encapsulate with POE, lower water permeability, to avoid delamination
-  No snail trail
-  Highly anti-corrosion, such as ammonia or saline
-  30-year linear performance warranty ensure higher ROI of the power plant

## I-V & P-V Curve

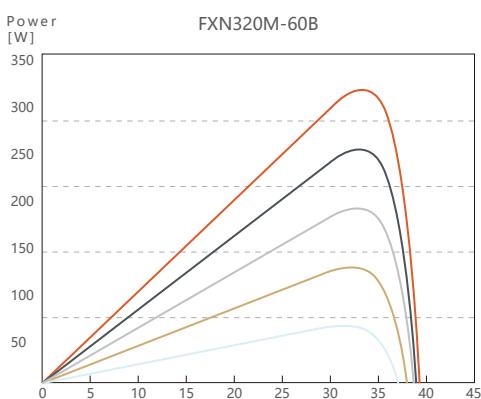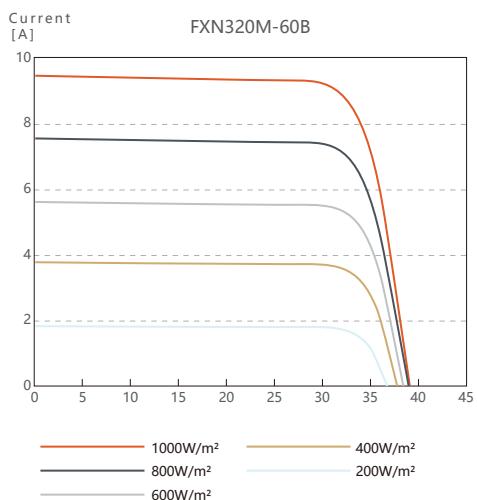

## DIMENSION(mm)

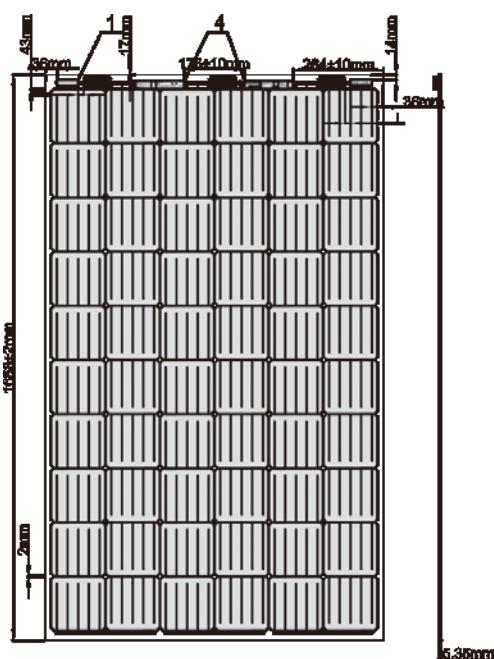

## ELECTRICAL SPECIFICATION (STC)

Module	FXN315M-60B	FXN320M-60B	FXN325M-60B	FXN330M-60B
Rated Power (Pmpp) (W)	315	320	325	330
Power Output Tolerance (W)		0~+5		
Rated Current (Impp) (A)	9.31	9.39	9.44	9.52
Rated Voltage (Vmpp) (V)	33.84	34.08	34.43	34.67
Short Circuit Current (Isc) (A)	9.8	9.82	9.87	9.89
Open Circuit Voltage (Voc) (V)	39.89	40.03	40.33	40.45
Efficiency(%)	19.1	19.4	19.7	20.0
Operational Temperature		-40~+85°C		
Maximum Static Load		5400Pa		
Maximum Wind Load		2400Pa		
Maximum System Voltage		IEC:1000/1500V		
Maximum Series Fuse Rating		20A		

STC : Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.

## MECHANICAL SPECIFICATION

Cell Type	bifacial cells
Cell Orientation	156.75mm × 156.75mm
Module Dimensions	1658mm × 992mm × 5mm (J-box not included )
Weight	19.6kg
Front Glass	2mm tempered AR glass
Encapsulant	POE
Back Glass	2mm ceramic coated glass
Junction Box	IP68 (three bypass diodes)
Cable	4mm <sup>2</sup>
Connector	MC4 / MC4 equivalent

## TEMPERATURE COEFFICIENT

NOCT ( Nominal Operating Cell Temperature )	45±2°C
Temperature Coefficient of Isc	+0.0484%/°C
Temperature Coefficient of Voc (β)	-0.2883%/°C
Temperature Coefficient of Pmpp (γ)	-0.3797%/°C

## PACKAGING CONFIGURATION

Modules per box	38 pieces
Modules per 40' container	988 pieces