


MPS-VII SERIES

- Pure sine wave solar inverter
- Output power factor 1.0
- Wifi&GPRS available for IOS and android
- Inverter running without battery
- Built-in 100A MPPT solar charger
- High PV input voltage range(120~500VDC)
- Built-in anti-dusk kit for harsh environment
- Smart battery charge design to optimize battery life
- Remove LCD



- **Detachable LCD control module with various communications**

The detachable LCD control module can be disassembled. Equipped with remote control line up to 20m. Users can monitor and set up inverters far away.

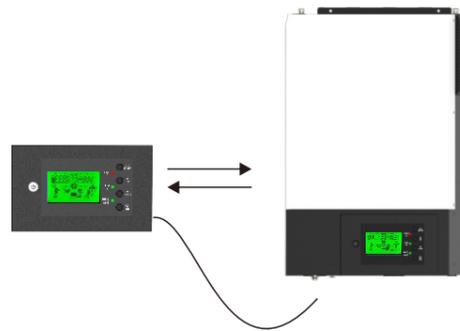


- **It is applicable to the lithium battery system Customizable BMS system**




- **Working with or without battery, only**

■ Operation without battery connected

1 Solar Power available




2 AC Power available



- **Detachable LCD control module users can be free and practical**



KEY FEATURES

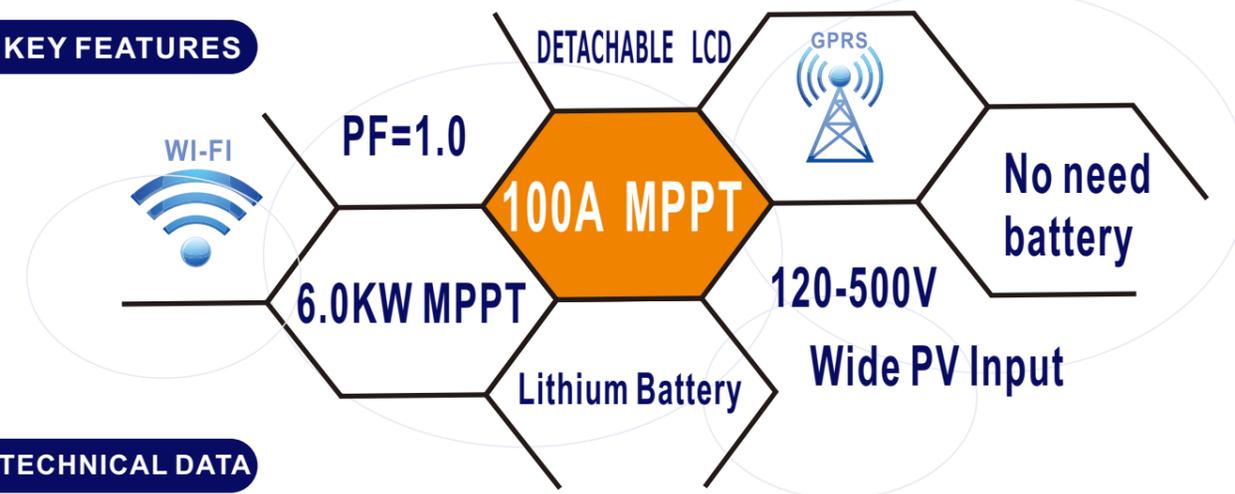

TECHNICAL DATA

Model	MPS-VII-3500W	MPS-VII-5500W
RATED POWER	3500VA/3500W	5500VA/5500W
Input		
Voltage	230VAC	
Selectable Voltage Range	170~280VAC(For Personal Computers)	
	90~280VAC(For Home Appliances)	
Frequency Range	50 Hz/60Hz(Auto sensing)	
OUTPUT		
AC Voltage Regulation(Batt.Mode)	230VAC±5%	
Surge Power	7000VA	11000VA
Efficiency(Peak)PV to INV	97%	
Efficiency(Peak)Battery to INV	94%	
Transfer Time	10 ms (For Personal Computers);20 ms (For Home Appliances)	
BATTERY & AC CHARGER		
Battery Voltage	24VDC	48VDC
Floating Charge Voltage	27VDC	54VDC
Overcharge Protection	33VDC	63VDC
Maximum Charge Current	80A	80A
SOLAR CHARGER		
Maximum PV Array Power	5000W	6000W
MPPT Range @ Operating Voltage	120~450VDC	
Maximum PV Array Open Circuit Voltage	500VDC	
Maximum Charging Current	100A	100A
Maximum Efficiency	98%	
PHYSICAL		
Dimension,D*W*H(mm)	100*300*440	
Net Weight(kgs)	11	12
Communication interface	REMOVE LCD/RS232/GPRS/WIFI	
OPERATING ENVIRONMENT		
Mumidity	5% to 95% Relative Humidity(Non~condensing)	
Operating Temperature	0°C~55°C	
Storage Temperature	-15°C~60°C	