

IGNITE THE POWER OF NATURE

Monocrystalline Module

--small size 170Watt

Model (RD170M6) Specifications











Electrical Data

| Maximum Power(W) | 170W |
|--------------------------------|-------------|
| Optimum Power Voltage(Vmp) | 19.08V |
| Optimum Operating Current(Imp) | 8.91A |
| Open Circuit Voltage(Voc) | 22.59V |
| Short Circuit Current(Isc) | 8.99A |
| Cell Efficiency | 19.80% |
| Module Efficiency | 17.14% |
| Tolerance Wattage | 0~+3% |
| NOCT | 47°C +/-2°C |

Benefits

- High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- ∑Bypass diode minimizes the power drop caused by shade;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.

Applications

- ○On-grid residential roof-tops
- COn-grid commercial/industrial roof-tops
- Solar power stations
- ☐Other on-grid applications

Temperature Coefficients

| Temperature Coefficients of Isc(%)℃ | +0.04 |
|---|-------|
| Temperature Coefficients of Voc(%) $^{\circ}\mathrm{C}$ | -0.38 |
| Temperature Coefficients of Pm(%)℃ | -0.47 |
| Temperature Coefficients of Im(%)°C | +0.04 |
| Temperature Coefficients of Vm(%)℃ | -0.38 |





IGNITE THE POWER OF NATURE


Monocrystalline Module

--small size 170Watt

Components & Mechanical

| Solar Cell | 156.75*156.75 Mono |
|-------------------------------|---------------------|
| Number of Cell(pcs) | 4*9 |
| Size of Module(mm) | 1485*668*40 |
| Front Glass Thikness(mm) | 3.2 |
| Surface Maximum Load Capacity | 2400Pa |
| Allowable Hail Load | 23m/s ,7.53g |
| Weight Per Piece(KG) | 11.6 |
| Bypass Diode Rating(A) | 10 |
| Frame(Material Corners,etc.) | 40# |
| Temperature Range | -40°C to +85°C |
| FF (%) | 70-76% |
| Standard Test Conditions | AM1.5 1000W/m² 25°C |

Engineering Drawings

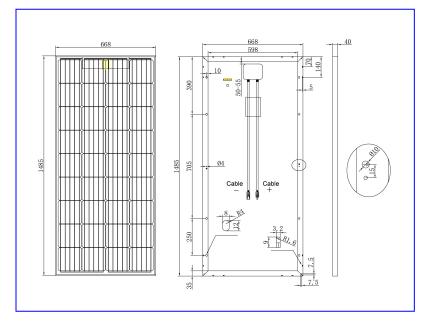

© 2019 NINGBO RENELED NEW ENERGY CO.,LTD. All rights reserved. Specifications included in this datasheet are subject to change without notice.



















Warranty & Certifications

| Warranty | 25 years limited power warranty |
|----------------|-----------------------------------|
| | 10 years limited product warranty |
| Certifications | IEC 61215, IEC 61730 |

Packing

| Packing | 2PCS/CTN or Pallet Packing |
|---------|----------------------------|

Project Picture



NINGBO RENELED NEW ENERGY CO.,LTD.

ADD: No. 35 Jintong Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China

TEL: 0086 (0)574 65786319 FAX: 0086 (0)574 65786317 Email: info@renepv.com

