



## Mono-crystalline Silicon Photovoltaic Module



**WS360-375WG6M**

### Features :

- High power module using 6" mono-crystalline solar cell.
- Bypass diode minimizes power drop by shade.
- Using optical low iron tempered glass, EVA laminate and Tedlar backsheet.
- Anodize aluminum frame protected.
- Manufactured in ISO 9001 : 2000 certified facility.
- 20-years limited warranty on power output.

NO.7-1, Ln.3, Xinhe 1st Rd., Tainan City 702, Taiwan

TEL: +886-6-2648199 FAX: +886-6-2657069

[www.target-solar.com](http://www.target-solar.com)

[info@target-solar.com](mailto:info@target-solar.com)

# Specifications :

Model \ Power	360W	365W	370W	375W
Max power voltage Vmp(V)	39.44	39.73	40.01	40.24
Max power current Imp(A)	9.13	9.19	9.25	9.32
Open circuit voltage Voc(V)	47.52	47.74	47.95	48.54
Short circuit current Isc(A)	9.84	9.93	10.02	10.03
Weight(KG)	22.5			
Number of cells	72			
Module Efficiency(%)	18.6%	18.8%	19.1%	19.35%
Power Tolerance	+/-3%			

\*1 STC: Irradiance level 1000 W/m<sup>2</sup>; Spectral AM1.5; Temperature 25°C

\*2 Power tolerance can be adjusted upon requests


\*3 NOCT: 46±2°C

### Mechanical Characteristics


Dimensions of the Module (W×H×D)(mm) 1948X995X40

Junction box IP 67 or above with 3 bypass diodes ; cables 1.3M/φ 4mm<sup>2</sup>

Series fuse rating Inside Junction Box 15A

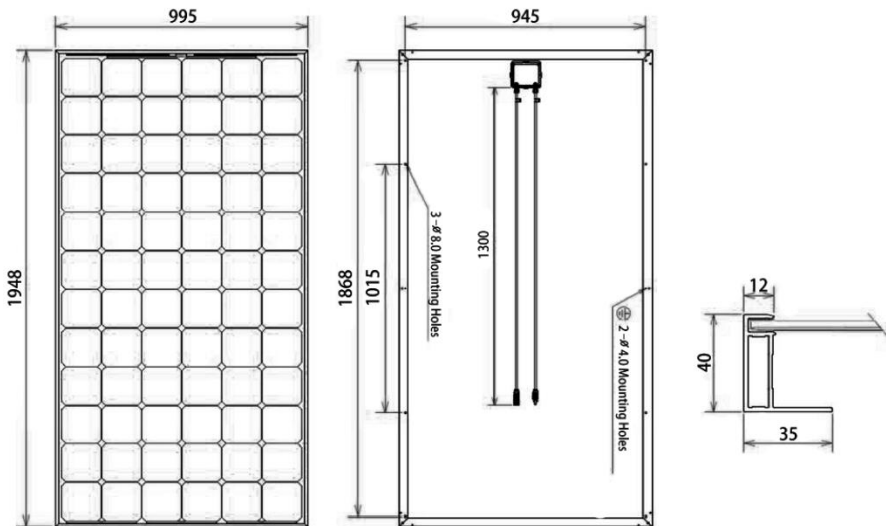

### IV Curve

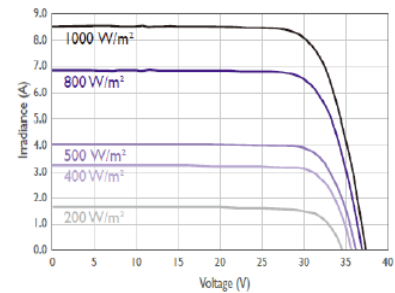

### Packing Configuration

Container	20'GP	40'HQ
Pieces per pallet	52	26
Pallets per container	5	24
Pieces per container	260	624

### Warranty

Product Warranty:

10 Years for Material and Workmanship

Performance Guarantee:

90% for 10 Years Guaranteed Output

80% for 25 Years Guaranteed Output

### Working Condition

Maximum System Voltage: 1000V

Operating Temperature: -40 ~ +85°C

Maximum Static Load: Snow load 5400pa

Wind load 3600pa

### Temperature Coefficient

Isc Temperature Coefficient: α(%/°C) +0.06

Voc Temperature Coefficient: β(%/°C) -0.33

Pmax Temperature Coefficient: γ(%/°C) -0.44

NO.7-1, Ln.3, Xinhe 1st Rd., Tainan City 702, Taiwan

TEL: +886-6-2648199 FAX: +886-6-2657069

[www.target-solar.com](http://www.target-solar.com)

[info@target-solar.com](mailto:info@target-solar.com)