



**MULTI  
BUSBAR**

**FU 360 / 365 / 370 M SILK® Pro - All Black**  
Monocrystalline Photovoltaic Module - 120 half-cut MBB cells

Engineered  
in Italy






- > IEC 61215:2016 - IEC 61730:2016 & Factory Inspection
- > Fire Resistance - Class C



**GENERAL FEATURES**

- **Total black look for particular architectural requirements**
- **15-year product warranty**
- **9 busbar 166 mm half-cut PERC cells**
- **High module efficiency up to 20.31%**
- **Less shades and more reflected light** to the cell thanks to the round ribbon
- **2 independent section** design secures a higher energy yield in case of shading
- **Low Hot-Spot risk** thanks to half-cut design and multi busbar
- **Improved low light performance**
- **Low NMOT**, improving the power generation efficiency
- **Half cut design in combination with multi busbar** reduce internal resistance **increasing the power output**

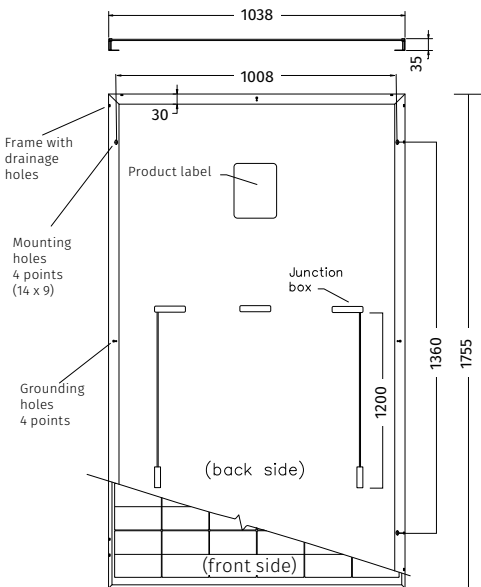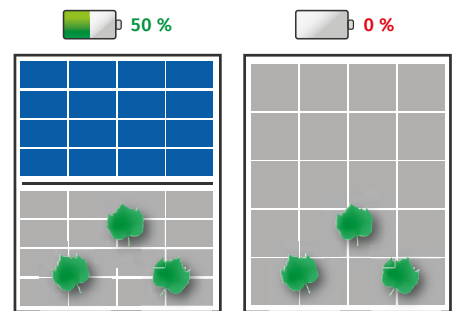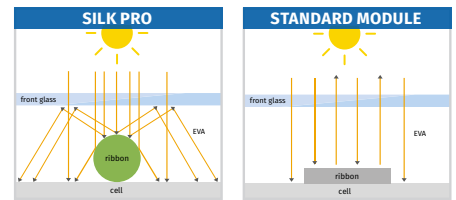

Note: dimensions in mm  
tolerance +/- 2 mm

**GUARANTEES**


**Performance guarantee**

Max power decrease **0.5%/year**  
97% at the end of first year  
**90% at the end of 20<sup>th</sup> year** **NEW**  
87% at the end of **25<sup>th</sup> year**

**Product guarantee**

**15 YEARS** **NEW**

Market standard performances  
FuturaSun performances

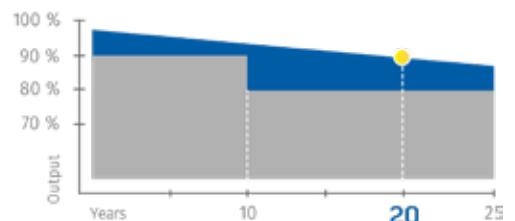

## ELECTRICAL DATA

MODULE SILK® Pro		FU 360 M SILK® Pro	FU 365 M SILK® Pro	FU 370 M SILK® Pro
<i>Standard Test Conditions STC: 1000 W/m<sup>2</sup> - AM 1.5 - 25 °C - tolerance: Pmax (±3%), Voc (±4%), Isc (±5%)</i>				
Module power (Pmax)	W	360	365	370
Open circuit voltage (Voc)	V	40.80	41	41.20
Short circuit current (Isc)	A	11.15	11.23	11.31
Maximum power voltage (Vmpp)	V	33.81	34.02	34.23
Maximum power current (Impp)	A	10.65	10.73	10.81
Module efficiency	%	19.76	20.04	20.31

*Nominal Module Operating Temperature NMOT: 800 W/m<sup>2</sup> - T=45 °C - AM 1.5*

Module power (Pmax)	W	266	269	273
Open circuit voltage (Voc)	V	37.75	37.96	38.16
Short circuit current (Isc)	A	9.11	9.16	9.21
Maximum power voltage (Vmpp)	V	31.10	31.30	31.50
Maximum power current (Impp)	A	8.54	8.60	8.66

## TEMPERATURE RATINGS

Temperature coefficient Isc	%/°C	0.05
Temperature coefficient Voc	%/°C	-0.28
Temperature coefficient Pmax	%/°C	-0.35
NMOT *	°C	45
Operating temperature	°C	from -40 to +85

\*Nominal Module Operating Temperature

## MECHANICAL SPECIFICATIONS

Dimensions	1755 x 1038 x 35 mm
Weight	19.7 kg
Glass	High transmission, Low iron, Tempered, ARC, Transparent, 3.2 mm
Cell encapsulation	EVA (Ethylene Vinyl Acetate)
Cells	120 monocrystalline half-cut PERC cells 166 x 83 mm
Backsheet	Black composite multilayer film
Frame	Black anodized aluminium frame with mounting and drainage holes
Junction box	Certified according to IEC 62790, IP 68 approved, 3 bypass diodes
Cables	Solar cable, length 1200 mm or customized assembled with MC4-compatible plugs
Maximum reverse current (Ir)	20 A
Maximum system voltage	1000 V (1500 V on request)
Mechanical load (snow)	Design load: 3600 Pa 5400 Pa (including safety factor 1.5)
Mechanical load (wind)	Design load: 1600 Pa 2400 Pa (including safety factor 1.5)
Protection Class	II - accordance to IEC 61730

Authorized Dealer



**FuturaSun srl**

Riva del Pasubio, 14 - 35013 Cittadella - Italy  
Tel + 39 049 5979802 Fax + 39 049 0963081  
[www.futurasun.com](http://www.futurasun.com) - [info@futurasun.it](mailto:info@futurasun.it)