

### Mechanical characteristics

Cell Type	Poly-crystalline 156.75×52.25mm
No. of Cells	36(4×9)
Dimensions	545×668×25mm
Weight	4.0kgs
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65 Rated
Output cables	2.5mm <sup>2</sup> cable 90cm+mc4
Quantity/cartons	5pcs


### Product Standard

Product Performance	IEC61215
Product Safety	IEC61730

### Specifications

Model Type	AU55-18-P
Peak Power(Pmax)	55.00
Maximum Power Voltage(Vmp)	18.67
Maximum Power Current(Imp)	2.95
Open Circuit Voltage(Voc)	22.87
Short Circuit Current(Isc)	3.11
Cells Efficiency(%)	18.65
Module Efficiency(%)	15.10
Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	10
Power Tolerance	0 ~ +3 %
Pmax Temperature Coefficients(W/°C)	-0.400 %
Voc Temperature Coefficients(V/°C)	-0.300 %
Isc Temperature Coefficients(A/°C)	+0.060 %
NOCT Nominal Operating Cell Temperature(°C)	45±2
Operating and Storage Temperature(°C)	-40 ~ +85
Standard Test Condition(STC)	1.000W/m <sup>2</sup> ; AM 1.5; 25+/-2°C

### Linear Performance Warranty

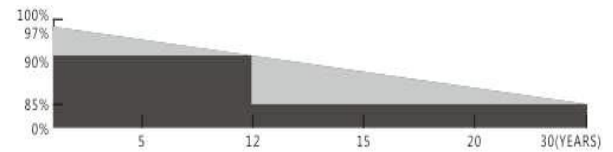

**12 YEARS** Guarantee on product material and workmanship

**30 YEARS** Linear Power output warranty

### Key Features



**5 Busbar Cell:**  
5 Busbar Solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance making it perfect for rooftop installation and application



**High Efficiency**  
High Module conversion efficiency, through innovative manufacturing technology



**Low-Light Performance**  
Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments



**Serve Weather Resilience**  
Certified to withstand: wind load(2400Pa) and snow load (5400Pa)



**Durability against extreme environmental conditions**  
High salt mist and ammonia resistance certified by TUV



**0 to +5W Positive Tolerance**  
Detailed information in Electrical Specifications

### Certification



### Drawing Picture

