




LiFePO4 Battery SF48200-5U (51.2V200Ah)

Features

- Standard size:** it can be installed in a standard 19" cabinet. Height is 5U only, saving cabinet space.
- Lower usage cost:** Longer cycle life, Lower usage cost;
- Wider discharge temperature range:** -20~65°C.
- Superior safety:** High safety lithium iron phosphate cell, equipped with high-precision BMS, to ensure Safe operation of battery pack;
- Intelligent BMS:** can communicate with PCS, real-time monitoring and remote control battery pack status;

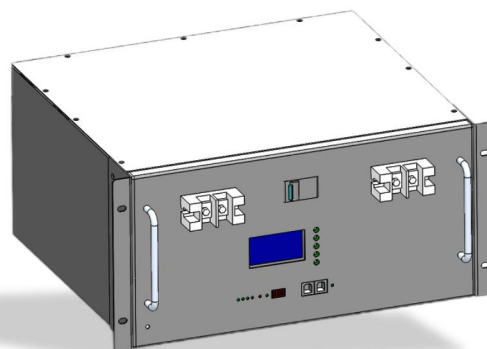


Applications

Length*Width*Height: 442*580*221mm
(Excluded Terminals, handles & mounting ears)


Specification

Nominal voltage	51.2V	Nominal capacity	200Ah
Energy	10.24KWh	Cycle life	3000 cycles @25°C,0.2,C,80%DOD
Charge voltage	≤58.4V	Discharge voltage	≥40V
Charge current	100A	Discharge current	≤100A
Charge temperature	0~45°C	Discharge temperature	-20~65°C
Storage temperature	0~45°C	Self-discharge rate	≤3%/month
Shell material	Q235	IP class	IP30
N.W:	~85Kg	Material system	Lithium Iron Phosphate (LFP)
Terminals	Quick plug	Option functions	LCD
Protective function	Over-current,Over-voltage,Low-voltage,Over-temperature,Low-temperature,Short-circuit protections etc		
Communication interfaces	CAN & RS485 (Each one, connected to PCS, CAN be configured according to PCS communication protocol, to meet the communication requirements of PCS of any brands)		
Other functions	20A Charge current limiting, dry contact, 125A circuit breaker, Cell voltage balance, reset switch etc		

Discharge voltage curve at Different temperature

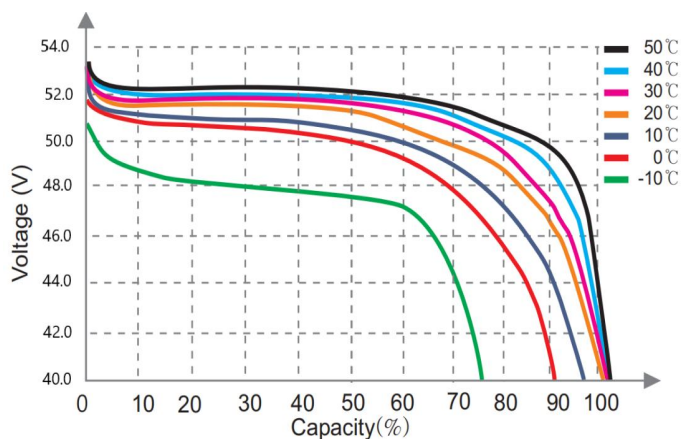

Cycle life at different DOD

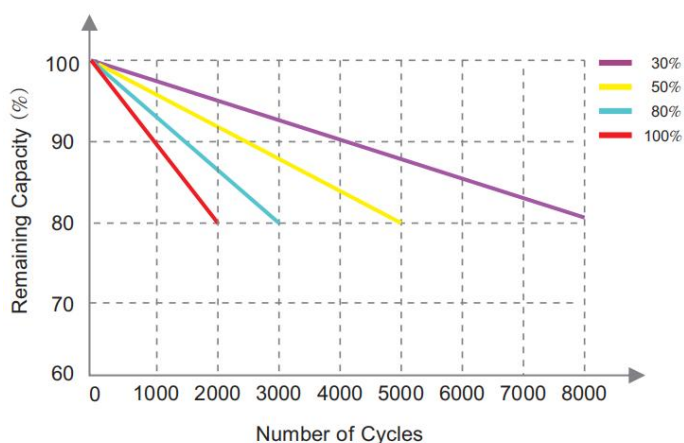

Zhuhai Angel Energy Technology Co., Ltd

W: www.agmenergy.net

T/F: +86-0756-5239892

Contact: James Wong E: agm01@agmenergy.net

Whatsapp/M: +86-13527267085 Wechat: Cindy-AGM

Add: Bldq2, No.26, 2nd Xinke Road, Baijiao Technology Industrial Park, Doumen District, Zhuhai, GD, China.