


JT SGh 530-550W Monocrystalline Solar Module

144 Cells / Mono PERC / 1500V DC / 21.5% Maximum Efficiency



KEY FEATURES

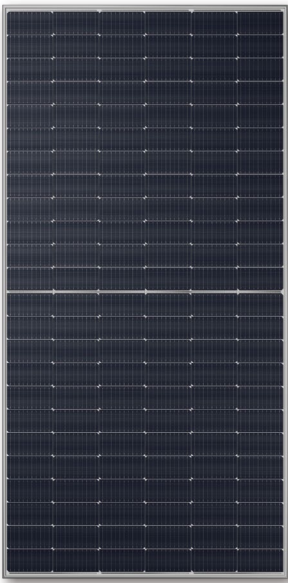

Higher module conversion efficiency

Maximize limited space with high efficiency mono PERC cells
Half-cell design, lower R_s loss, lower hot spot temperature



Highly reliable due to stringent quality control

100% EL double inspection
In-house testing goes well beyond certification requirements



Excellent low light performance

Excellent low light performance on cloudy days
mornings and evenings



Certified to withstand the most challenging environment

2400 Pa wind load • 5400 Pa snow load • 25 mm hail stones at 82 km/h



High system voltage compatible

Maximum 1500V DC system voltage saves total system cost



IP68 junction box

High waterproof level for long term weather endurance

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety
- IEC 62941: Design and Manufacture of Crystalline Silicon Photovoltaic Modules

JETION SOLAR

As a member of CNBM - a Fortune 500 company, Jetion Solar provides various product solutions, global EPC service and financing. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. Till now, Jetion Solar has cumulatively more than 10 GW module shipment and 1 GW global EPC track records.


WARRANTY

12
years

Product
Warranty

25
years

Performance
Warranty


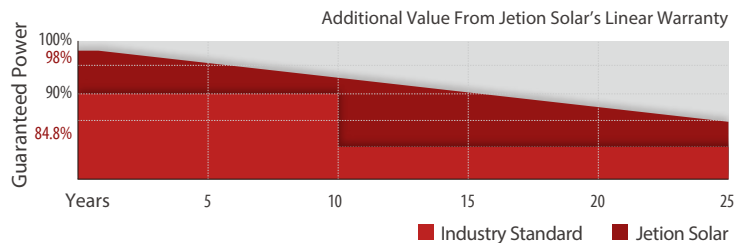


Jetion Solar (China) Co., Ltd.

Add: 1011 Zhencheng Road, Jiangyin, Jiangsu Province, P.R. China 214443
Tel: +86 (510) 8668 7300 400-8868-659
E-mail: marketing@jetion.com.cn
Web: www.jetionsolar.com



IV CURVES

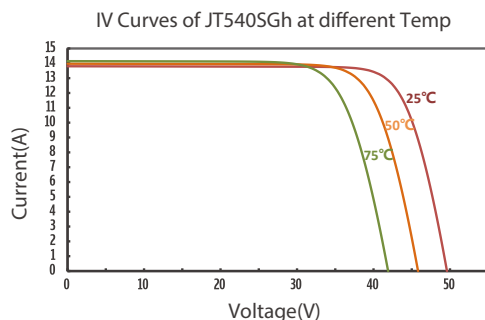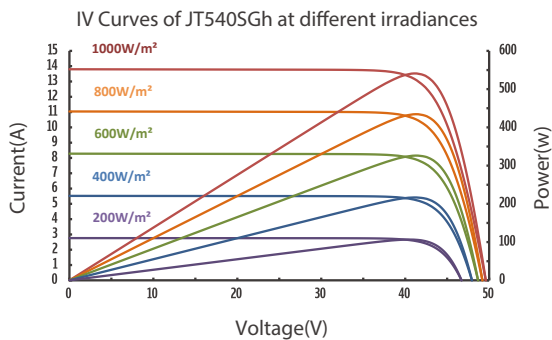

ELECTRICAL DATA *STC

| TYPE (Tolerance: 0 - +5W) | JT530SGh | JT535SGh | JT540SGh | JT545SGh | JT550SGh |
|-------------------------------|----------|----------|----------|----------|----------|
| Maximum Power Pmax (W) | 530 | 535 | 540 | 545 | 550 |
| Maximum Power Voltage Vmp (V) | 41.3 | 41.5 | 41.7 | 41.9 | 42.1 |
| Maximum Power Current Imp (A) | 12.84 | 12.90 | 12.95 | 13.01 | 13.07 |
| Open Circuit Voltage Voc (V) | 49.2 | 49.4 | 49.6 | 49.8 | 50.0 |
| Short Circuit Current Isc (A) | 13.69 | 13.75 | 13.80 | 13.86 | 13.92 |
| Module Efficiency (%) | 20.7% | 20.9% | 21.1% | 21.3% | 21.5% |

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

Measuring tolerance: ±3%

ELECTRICAL DATA *NMOT


| | | | | | |
|-------------------------------|--------|--------|--------|--------|--------|
| Maximum Power Pmax (W) | 397.20 | 401.19 | 405.21 | 409.25 | 413.31 |
| Maximum Power Voltage Vmp (V) | 38.6 | 38.8 | 39.0 | 39.2 | 39.4 |
| Maximum Power Current Imp (A) | 10.29 | 10.34 | 10.39 | 10.44 | 10.49 |
| Open Circuit Voltage Voc (V) | 46.2 | 46.4 | 46.6 | 46.8 | 47.0 |
| Short Circuit Current Isc (A) | 11.03 | 11.08 | 11.12 | 11.16 | 11.2 |

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE RATINGS

| | |
|--|------------|
| Temperature Coefficient of Isc (αIsc) | +0.048%/°C |
| Temperature Coefficient of Voc (βVoc) | -0.27%/°C |
| Temperature Coefficient of Pmax (γPmp) | -0.35%/°C |
| Normal Module Operating Temperature (NMOT) | 41°C±3°C |

DIMENSION

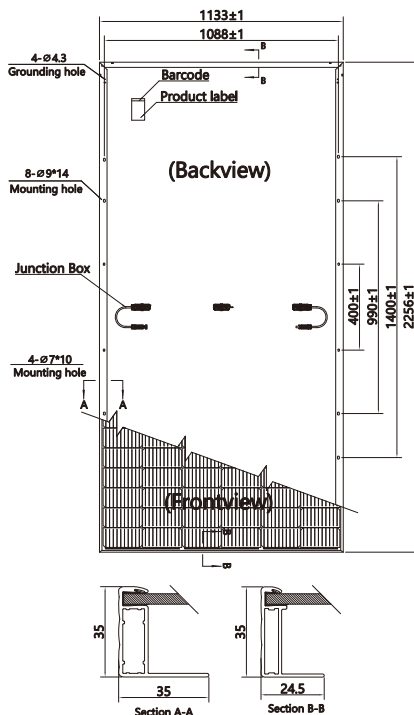

OPERATING PARAMETERS

| | |
|------------------------------|---------------|
| Maximum System Voltage | 1500V/DC(IEC) |
| Operating Temperature | -40°C~+85°C |
| Maximum Series Fuse | 25A |
| Maximum Test Load, Push/Pull | 5400Pa/2400Pa |
| Conductivity at Ground | ≤ 0.1Ω |
| Safety Class | II |
| Resistance | ≥100MΩ |
| Voc and Isc Tolerance | ±3% |

MECHANICAL DATA

| | |
|-------------------|---|
| Solar Cell Type | Mono 91×182 mm(3.6×7.2 inches) |
| Number of Cells | 144 [2 x (12 x 6)] |
| Module Dimensions | 2256×1133×35 mm(88.8×44.6×1.4 inches) |
| Weight | 27.2 kg(60 lb) |
| Front Cover | 3.2 mm (0.13 inches), high transmission, AR coated tempered glass |
| Back Cover | White composite film |
| Frame | Silver, anodized aluminium alloy |
| J-Box | ≥IP68 |
| Cable | 4.0 mm ² solar cable, 150/300 mm(5.9/11.8 inches) |
| Number of diodes | 3 |
| Connector | MC4 EVO2 compatible |

PACKAGING CONFIGURATION

| | |
|----------------------------|------------------------|
| Module per pallet | 31 pieces |
| Module per 40'HQ container | 20 pallets, 620 pieces |

Remarks

*Installation instruction must be followed. See the installation manual or contact our technical service department for further information on approved installation.
 *The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jetion Solar (China) Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Jetion Solar_REV_2022_03_EN