

Topsun's Crystalline Photovoltaic Modules are manufactured under Integrated Management System (ISO 9K: ISO 14K: BS 18K) for quality and safety environment. Offers high module efficiencies with consistent performance, quality workmanship and antimony free glass material. High power modules precisely manufactured to achieve better module conversion efficiency in the industry. Environmental friendly product confirming to RoHS standards.

Features :

- Multi Crystalline
- PID Free
- Micro cracks free -100% EL inspected
- AR coated glass for better positive tolerance
- RoHS and CE certified
- Linear degradation as per Industry standard
- Best suited for Grid Tied applications

Product Certifications :

- IS14286/IEC 61215: 2005 Ed 2.0
- IEC/IS 61730-1: 2013/2004 Ed 1.2/IEC 61730-1: 2007
- IEC/IS 61730-2: 2012/2004 Ed 1.1/IEC 61730-2: 2007
- IEC 61701: 2012 salt mist corrosion test
- IEC 62716: 2013 Ammonia corrosion test
- IEC 62804: 2015 Potential Induced Degradation

Organization Certifications :

- ISO 9001; ISO 14001; OHSAS 18001 Certified
- ISO 50001 Certified
- ZED Certified



Typical Electrical Characteristics at STC

IV parameters are tested at STC (Irradiance of 1000W/m², AM 1.5G and Temperature 25°C)

Model/Type	(Pmax)	(Vmp)	(Imp)	(Voc)	(Isc)	Eff (%)
320 W	320.00	37.25	8.60	45.28	9.20	16.47
325 W	325.00	37.80	8.61	45.94	9.21	16.72
330 W	330.00	38.25	8.63	46.44	9.23	16.98
335 W	335.00	38.78	8.65	46.44	9.26	17.23
340 W	340.00	38.88	8.75	46.73	9.36	17.49

Electrical Parameters Tolerance: ± 3%

Compliance of Simulator readings with an accuracy of class AAA (±2%)

Typical Electrical Characteristics at NOCT

IV parameters are tested at NOCT (Irradiance of 800W/m², Temp at NOCT)

Model/Type	(Pmax)	(Vmp)	(Imp)	(Voc)	(Isc)
320 W	229.92	33.22	6.92	41.18	7.43
325 W	233.59	33.71	6.93	41.78	7.44
330 W	236.92	34.11	6.95	42.23	7.46
335 W	240.76	34.58	6.96	42.23	7.48
340 W	244.17	34.67	7.04	42.50	7.56

System Design

Series Fuse Rating (Recommended): 15 A

Maximum System Voltage: 1000 VDC

Static Load: 5400 Pa (113 Psf)

Module Dimension: 1961 x 991 x 40 mm

Module Weight: 22.50 kg (49.6 Lbs)


Temperature Co-efficients

NOCT	45±2	°C
Pmp	-0.43	%/°C
Isc	0.05	%/°C
Voc	-0.36	%/°C
Operating Temperature	-40 to +85	°C

Packing Configuration


Each Pallet	22 Modules
20 Ft Container	264 Modules
40 Ft /40Ft HC Container	528 Modules

Typical IV Curves


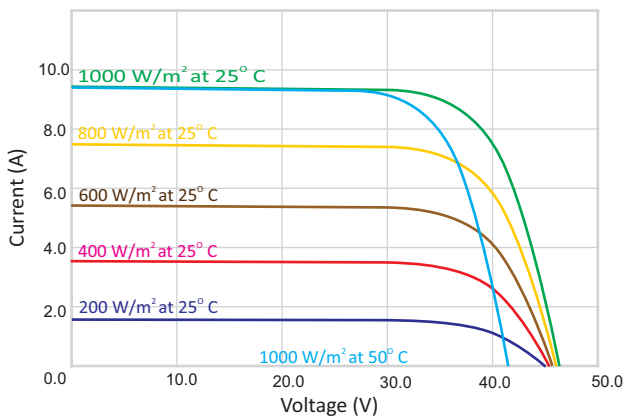


Current/voltage dependence on irradiance and module temperature. These I-V curves indicate the effect of temperature and light intensity on module Performance.

Dimensions:

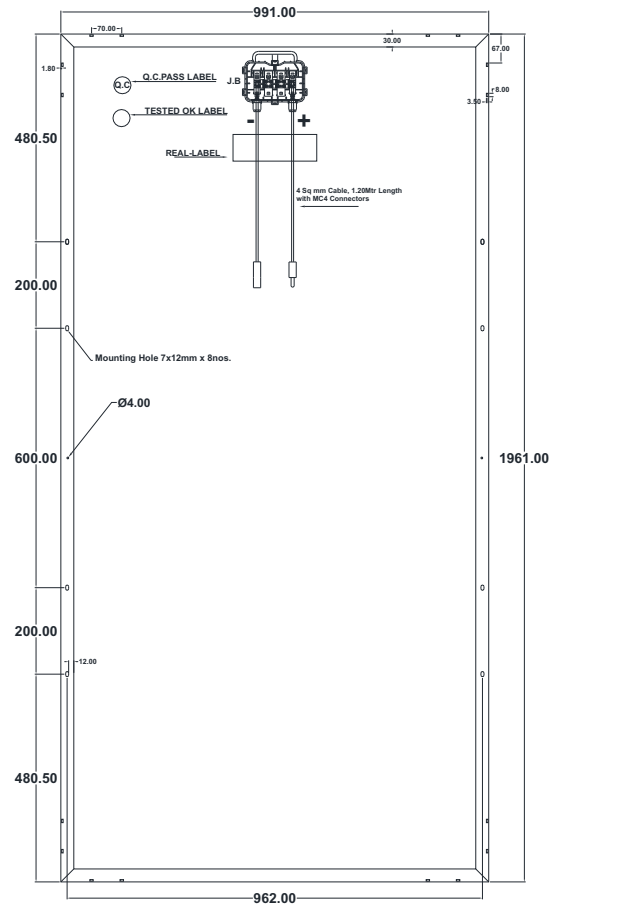

Tolerance: ± 2mm
All Dimensions are in mm



NOTE: Data within this document may change without any prior notice due to continual improvements. you are advised to get latest information before making any final decision on listed products.

Topsun Energy Ltd.

B-101, GIDC, Electronics Zone, Sector-25, Gandhinagar- 382 028, Gujarat, India. Phone/Fax: +91 79 23288804, 23288805.

Email: marketing@topsunenergy.com, Website: www.topsunenergy.com.