

### Mechanical characteristics

Cell Type	Poly-crystalline 156.75×130.625mm
No. of Cells	36(4×9)
Dimensions	1250×668×30mm
Weight	9.5kgs
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP65 Rated
Output cables	2.5mm <sup>2</sup> cable 90cm+mc4
Quantity/cartons	5pcs


### Product Standard

Product Performance	IEC61215
Product Safety	IEC61730

### Specifications

Model Type	AU135-18-P
Peak Power(Pmax)	135.00
Maximum Power Voltage(Vmp)	18.50
Maximum Power Current(Imp)	7.30
Open Circuit Voltage(Voc)	22.66
Short Circuit Current(Isc)	7.69
Cells Efficiency( % )	18.32
Module Efficiency( % )	16.16
Maximum System Voltage(V)	1000
Maximum Series Fuse Rating(A)	15
Power Tolerance	0 ~ +3 %
Pmax Temperature Coefficients(W/°C)	-0.400 %
Voc Temperature Coefficients(V/°C)	-0.300 %
Isc Temperature Coefficients(A/°C)	+0.060 %
NOCT Nominal Operating Cell Temperature(	45±2
Operating and Storage Temperature(°C)	-40 ~ +85
Standard Test Condition(STC)	1.000W/m <sup>2</sup> ;AM 1.5;25+/-2°C

### Linear Performance Warranty

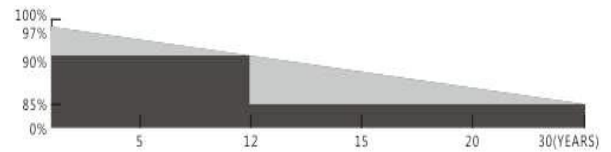

**12**  
YEARS

Guarantee on product material and workmanship

**30**  
YEARS

Linear Power output warranty

### Key Features



**5 Busbar Cell:**  
5 Busbar Solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance making it perfect for rooftop installation and application



**High Efficiency**  
High Module conversion efficiency, through innovative manufacturing technology



**Low-Light Performance**  
Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments



**Serve Weather Resilience**  
Certified to withstand: wind load(2400Pa) and snow load (5400Pa)



**Durability against extreme environmental conditions**  
High salt mist and ammonia resistance certified by TUV



**0-+5W Positive Tolerance**  
Detailed information in Electrical Specifications

### Certification



### Drawing Picture

