

# Mars Series

620W/625W/630W/635W/640W/  
645W

## SUN60M-H12J




HJT MBB HALF-CELL MONO PV MODULE  
210MM CELLS



### COMPREHENSIVE CERTIFICATES


IEC61215 / IEC61730 / IEC61701 / IEC62716 / IEC62804  
ISO 9001: 2015 Quality management systems;  
ISO 14001: 2015 Environmental management systems;  
OHSAS 18001: 2007 Occupational health and safety management systems;

### KEY SALIENT FEATURES

-  **High output power**
-  **Better Temperature Coefficient**
-  **Long weather resistance**
-  **Better power generation under shadows**
-  **Strong anti-hot spot ability**
-  **Strong mechanical load capacity**

### LINEAR PERFORMANCE WARRANTY

- 12 Years Manufacturing Warranty
- 12 Years 94.2% Power Output
- 25 Years 89.6% Power Output

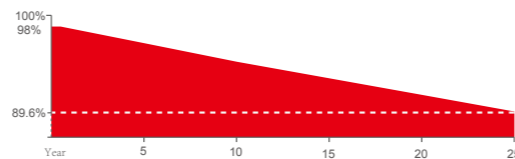

### SUNERGY USA WORKS LLC

Founded in 2008, Sunergy is a manufacturer of high-performance photovoltaic products. With 12 manufacturing bases and more than 20 branches around the world, the company's business covers modules, photovoltaic power stations and EPC. Sunergy products are available in over 120 countries and regions and are used extensively in ground-mounted power plants, commercial & industrial rooftop PV systems and residential rooftop PV systems.

### QUALIFICATIONS AND CERTIFICATES




SUNERGY USA WORKS LLC  
www.sunergyworks.com



# Mars Series SUN 60M-H12J

### MECHANICAL DRAWINGS

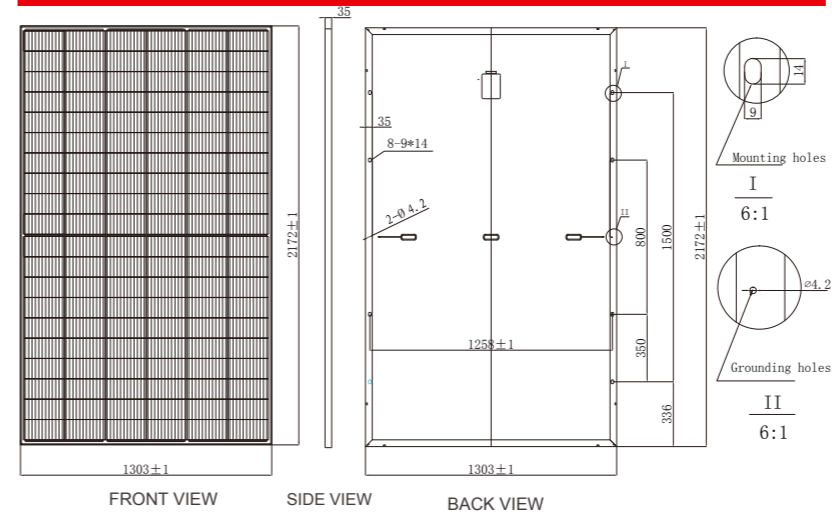

### MECHANICAL SPECIFICATION

Cell Type	HJT 210x105mm
Number Of Cells	120 (6x20)
Dimensions(AxBxC)	2172x1303x35mm
Weights	31.0kg
Glass	3.2mm Tempered Low Iron Glass
Aluminium Frame	Anodised Aluminium
Junction Box	Split Junction Box (IP68 ,three diode)
Connector	Mc4 Compatible
Output Cables	4.0mm <sup>2</sup> ,+300mm,-300mm Customized Length


### ELECTRICAL CHARACTERISTICS

Module Type	620W		625W		630W		635W		640W		645W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power At STC(Pmax)	620W	479.0W	625W	482.9W	630W	486.8W	635W	490.6W	640W	494.5W	645W	498.3W
Short Circuit Current(Isc)	17.21A	13.88A	17.25A	13.91A	17.31A	13.96A	17.35A	13.99A	17.40A	14.03A	17.44A	14.06A
Open Circuit Voltage(Voc)	44.7V	42.1V	44.9V	42.3V	45.1V	42.5V	45.3V	42.7V	45.5V	42.9V	45.7V	43.1V
Maximum Power Current(Imp)	16.19A	13.05A	16.23A	13.08A	16.28A	13.13A	16.32A	13.16A	16.37A	13.20A	16.41A	13.23A
Maximum Power Voltage(Vmpp)	38.3V	36.7V	38.5V	36.9V	38.7V	37.1V	38.9V	37.3V	39.1V	37.5V	39.3V	37.7V
Module Efficiency	21.91%		22.08%		22.26%		22.44%		22.61%		22.79%	
Power Tolerance	0~+5W		0~+5W		0~+5W		0~+5W		0~+5W		0~+5W	
Maximum System Voltage	VDC 1500V											
Maximum Series Fuse	30A											
Increased Snowload Acc.to Iec 61215	5400Pa											
Operating Temperature	-40~+85°C											
Number Of Bypass Diodes	3											
Norminal Operating Cell Temperature(Noct)	45°C±2°C											
Temperature Coefficient Of Pmax	-0.26%/°C											
Temperature Coefficient Of Voc	-0.24%/°C											
Temperature Coefficient Of Isc	0.04%/°C											


STC: 1000W/m<sup>2</sup> irradiance, 25°C cell temperature, AM1.5. NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, wind speed 1m/s.



### I-V CURVES

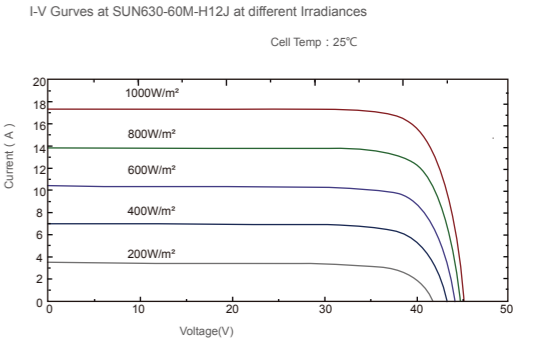

Power voltage current curve at different temperature



### PACKING CONFIGURATION

Container	40' HQ
Pieces Per Pallet	31
Pallets Per Container	17
Pieces Per Container	527

SUNERGY USA WORKS LLC  
www.sunergyworks.com

