

# Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery

## AJ-LFP12.8V30AH

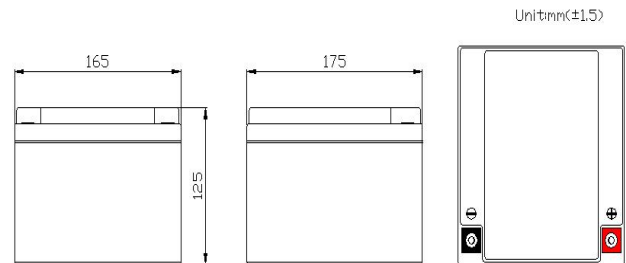
### Features

- ◆ Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions
- ◆ Built-in automatic protection for over-charge, over discharge, over current and over temperature
- ◆ Maintenance free
- ◆ Internal cell balancing
- ◆ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- ◆ Can be charged using most standard lead-acid charges (set)
- ◆ Wider temperature range:-20℃~60℃



### Application

- ◆ UPS
- ◆ Solar & Wind power system
- ◆ Golf Cart
- ◆ Electric vehicle , E-bike, E-rickshaw e.g.
- ◆ Lighting

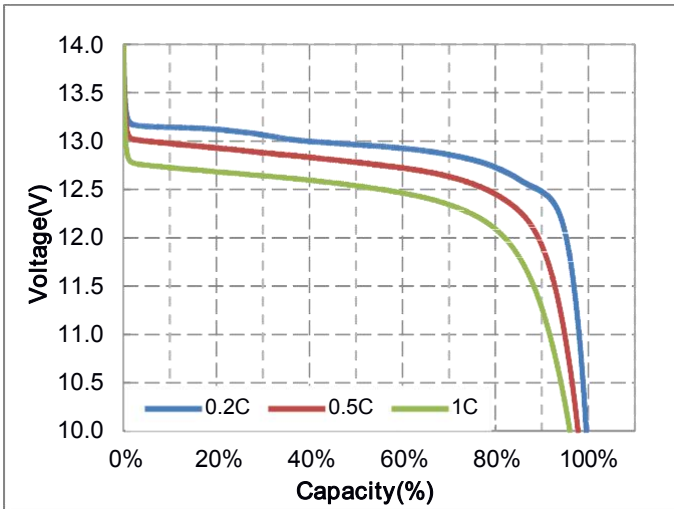
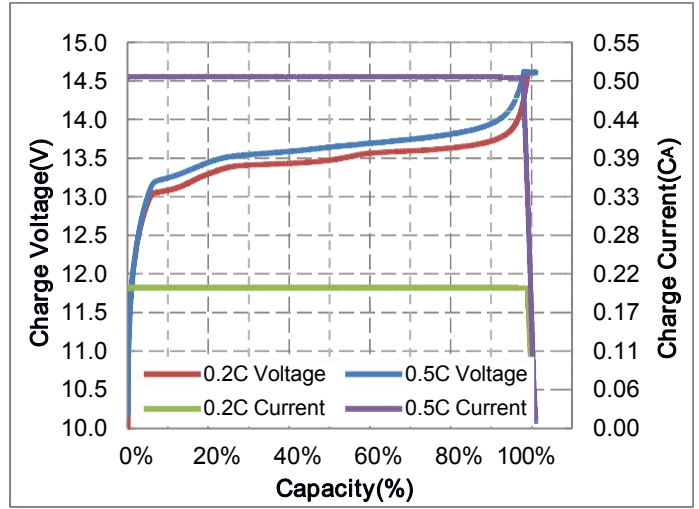
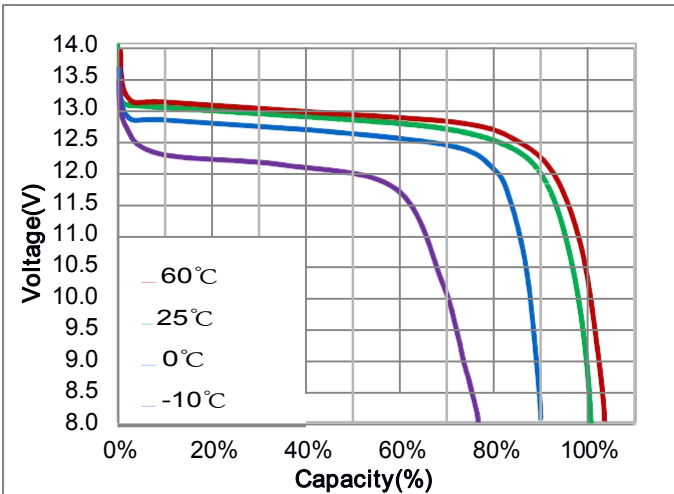
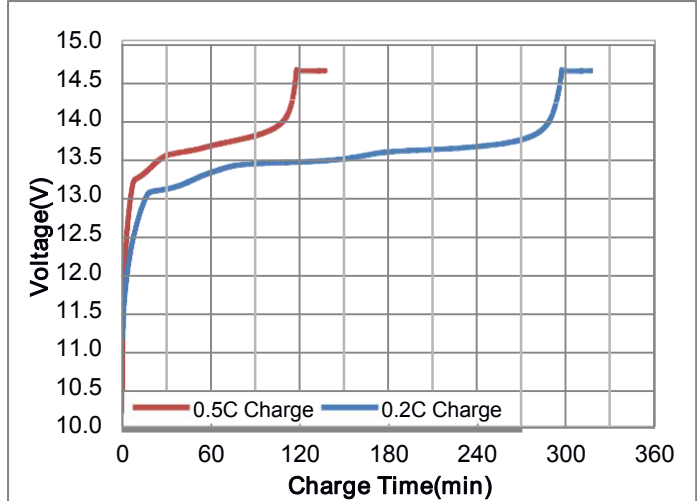
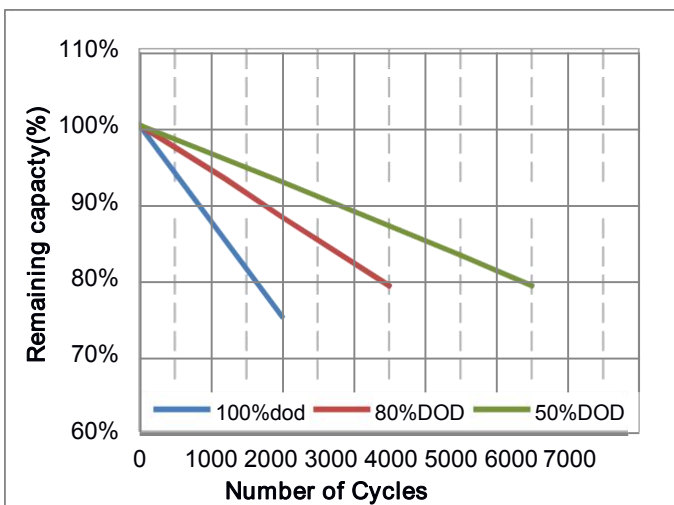


### General Specification

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	30Ah@0.2C
	Energy	384Wh
	Internal Resistance	≤55mΩ
	Cycle Life	>2000 Cycles @ 0.2C Charge/Discharge at 100%DOD,End of Life 70% Capacity.
	Months Self Discharge	≤3.5% per month at 25℃
Standard Charge	Charge Voltage	(14.6±0.2) V
	Charge Mode (CC/CV)	At 0℃~45℃ temperature, charged to 14.6V at a constant current of 0.2C <sub>5</sub> A, and then,changed continuously with constant voltage of 14.6V until the current was not more than 0.02C <sub>5</sub> A.
	Charger Current	6A
	Max.Charge Current	15A
Standard Discharge	Discharge Current	6A
	Max. Continuous Current	30A
	Max.Pulse Current	60A(<3S)
	Discharge Cut-off Voltage	10.0V
Environmental	Charge Temperature	0℃ to 45℃(32°F to 113°F) @60±25% Relative Humidity
	Discharge Temperature	-20℃ to 60℃(-4°F to 140°F) @60±25% Relative Humidity
	Storage Temperature	0℃ to 45℃(32°F to 113°F) @60±25% Relative Humidity
	Water Dust Resistance	IP55
Mechanical	Cell & Method	IFR32700 N60,4S5P
	Plastic Case	ABS
	Dimension(L*W*H*TH)	(165*175*125*125) mm
	Weight	Approx. 3.9Kg
	Terminal	M5

# Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery

## AJ-LFP12.8V30AH

**Different Rate Discharge Curve @ 25°C**

**Charge Characteristics @0.2C&0.5C, 25°C**

**Different Temperature Discharge Curve @0.5C, 25°C**

**Charge Characteristics @0.2C&0.5C, 25°C**

**Different DOD Discharge Cycle Life Curve @0.5C, 25°C**

**Open circuit voltage VS SOC%**
