


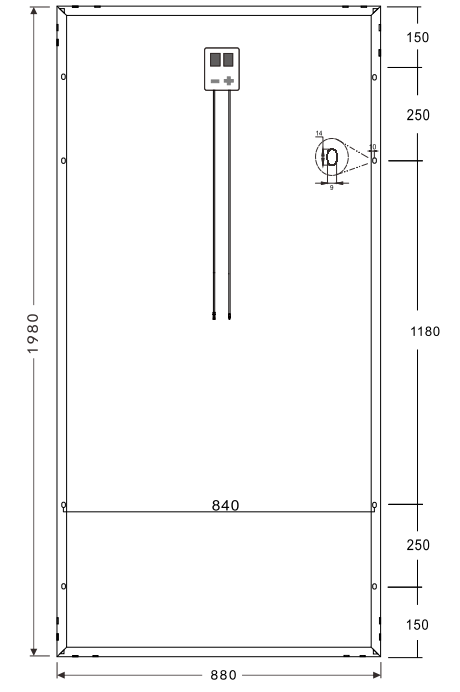


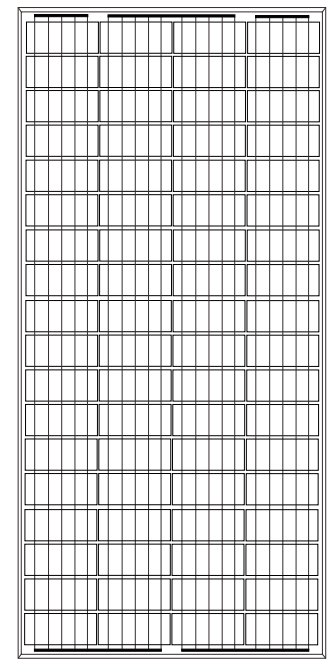

QN-210M36040

Comprehensive Certificates

- IEC61215/IEC61701/IEC61730
- ISO 9001:2015 Quality Management System
- ISO 45001:2018 Occupational health and safety management system
- ISO 14001:2015 Environmental Management System



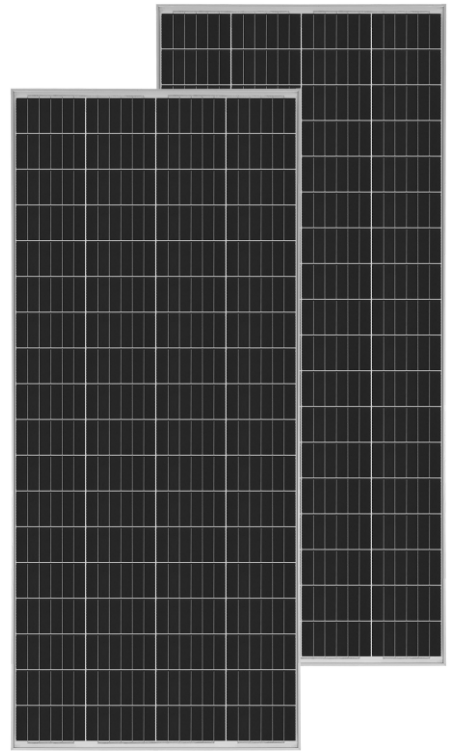


Units:mm/±2

Electrical Parameters at (STC)

Power (W)	Module Efficiency(%)	Voltage at Pmax(Vmp)	Current at Pmax(Imp)	Open Circuit Voltage(Voc)	Short Circuit Current(Isc)	Power Tolerance(w)
360W	20.66%	40.75	8.83	49.24	9.35	±3%

Characteristics



PS:Frame color and cable length can be customized

Mechanical Parameters

Solar Cell(Type/Size)	MONO(210mm)
Solar Cells Number	72Pcs(4x18)
Dimension	1980x880x35mm
Tempered Glass	3.2 mm High Permeability Coated
Frame	Anodized aluminum alloy
Junction Box	IP67 3*20AMOS diode
Cable	4.0mm ² , (+) 1000mm/ (-) 1000mm
Connector	Original MC4/Compatible MC4

Packing

Module Type	QN-210M36040
Carton Size	1990x890x85mm
Number	2Pcs/Ctn
G. W	42Kg/Pcs
N. W	40.1Kg/Pcs
20GP Container	375Pcs
40HQ Container	937Pcs

STC: Light intensity 1000W/m² Battery temperature:25°C atmosphere quality=15

NOCT: Light intensity 800W/m² Battery temperature:20°C atmosphere quality=15 wind velocity 1m/s