

# PolyPower Basic

ASP P6-36 Series 170W-175W

Polycrystalline PV-module



## QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



## GERMAN ENGINEERING

Best design by the art of German engineering



## SAVE INVESTMENT

Product warranty of 12 years and performance warranty of 25 years



## POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output



## FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



## STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa and wind loads up to 2400 Pa



12 YEARS

PRODUCT WARRANTY


Exemplary illustration of ASP P6-72

## OUR PERFORMANCE GUARANTEE



25 YEARS

PERFORMANCE GUARANTEE

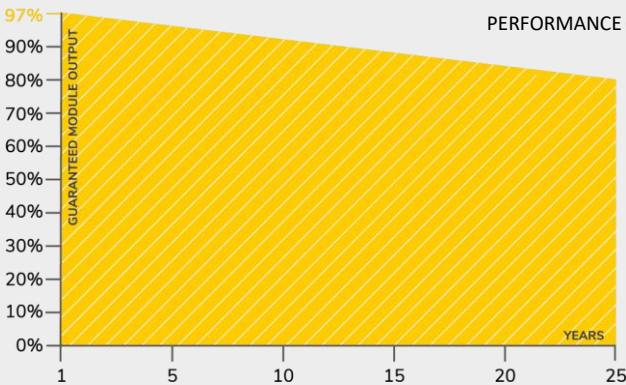

## CERTIFICATES



IEC 61215  
IEC 61730  
PERIODICAL  
INCEPTION



PID RESISTANT  
SALT MIST RESISTANT  
SAND RESISTANT  
CORROSIVE GAS (NH<sub>3</sub>)



Quality  
Diligence  
Durability



Exemplary illustration of ASP mono- and polycrystalline photovoltaic modules

# PolyPower Basic Module

ASP P6-36 Series 170W-175W

## TECHNICAL DATA

ASP170P6-36

ASP175P6-36

Maximum power	P <sub>max</sub> (Wp)	170	175
Maximum power voltage	V <sub>mp</sub> (V)	19.15	19.56
Maximum power current	I <sub>mp</sub> (A)	8.88	8.95
Open-circuit voltage	V <sub>oc</sub> (V)	23.31	23.52
Short-circuit current	I <sub>sc</sub> (A)	9.42	9.48
Module efficiency	%	17.14	17.65
Power tolerance	P <sub>max</sub> (W)	0/+5	
Maximum system voltage DC	V	1000	
Operating temperature	°C	-40 to +85	
Temperature coefficients of P <sub>max</sub>	%/°C	-0.40	
Temperature coefficients of V <sub>oc</sub>	%/°C	-0.31	
Temperature coefficients of I <sub>sc</sub>	%/°C	0.05	
Nominal operating cell temp. (NOCT)	°C	45±2	

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C.


## MATERIAL CHARACTERISTICS

Cell type	Polycrystalline 156.75 x 156.75 mm
No. of cells	36 (4 x 9)
Dimensions	1480 x 670 x 35 mm
Weight	10.8 kg
Junction box	IP67 rated
Output cable	4.0 mm <sup>2</sup> , 900 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m <sup>2</sup>
Mechanical load	5400 Pa / 550 kg / m <sup>2</sup>

## PACKING INFORMATION

Packing configuration	90 pcs / double pallet
Loading capacity	1350 pcs / 40 HQ
Size / pallet	1510 x 1135 x 2370 mm
Weight	1107 kg / pallet

## DRAWINGS

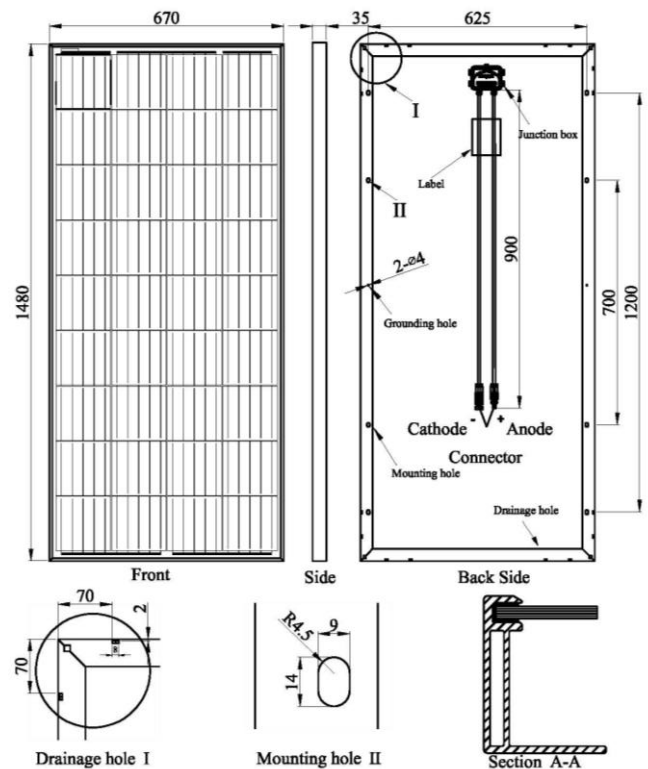

Alpha Solar Planet GmbH  
Döllgaststr. 4, 86199 Augsburg  
GERMANY

Tel.: +49 821 99972360  
Fax: +49 821 99972369

E-mail: sales@a-s-p.solar  
Web: www.a-s-p.solar

