

ELECTRICAL PARAMETERS@STC DM144H 530~550W

Max. Power Output	Pmax (Wp)	530	535	540	545	550
Power Tolerance	(%)	0~+3	0~+3	0~+3	0~+3	0~+3
Max. Power Voltage	Vmp (V)	40.74	40.88	41.01	41.15	41.28
Max. Power Current	Imp (A)	13.01	13.09	13.17	13.25	13.33
Open Circuit Voltage	Voc (V)	49.26	49.40	49.53	49.67	49.80
Short Circuit Current	Isc (A)	13.69	13.77	13.85	13.93	14.01
Module Efficiency	(%)	20.51	20.70	20.89	21.09	21.28

(Standard Test Condition)STC : Irradiance 1000W/m² , Module Temperature 25°C, AM 1.5 ,

ELECTRICAL PARAMETERS@NMOT

Max. Power Output	Pmax (W)	394	398	402	407	411
Max. Power Voltage	Vmp (V)	37.92	38.05	38.19	38.47	38.63
Max. Power Current	Imp (A)	10.40	10.46	10.52	10.58	10.64
Open Circuit Voltage	Voc (V)	46.50	46.63	46.75	46.88	47.01
Short Circuit Current	Isc (A)	11.06	11.12	11.19	11.25	11.32

(Nominal Module Operating Temperature)NMOT: Irradiance 800W/ m², Ambient Temperature 20°C, AM 1.5 ,Wind Speed 1m/s,

TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmax	-0.32%/°C
Temperature Coefficients of Voc	-0.26%/°C
Temperature Coefficients of Isc	+0.054%/°C

MECHANICAL PARAMETERS


Cell Type	Mono 182×91mm
Number of Cells	144pcs (2×(6×12))
Dimensions (L*W*H)	2279×1134×35mm
Weight	27.5kg
Frame	Anodized Aluminum
Junction Box	Ip68
Cable, Length	4mm ² /350mm

OPERATING CONDITION


Maximum System Voltage(V)	1500(DC)
Operating Temperature(°C)	-40~+85
Max. Wind Load / Snow Load(Pa)	2400/5400
Max. Over Current(A)	25 A
Application Class	ClassA
Fire Rating	ClassC
NMOT(°C)	42±3 °C

PACKAGE INFORMATION


Per Pallet	31PCS
40' HQ	620PCS

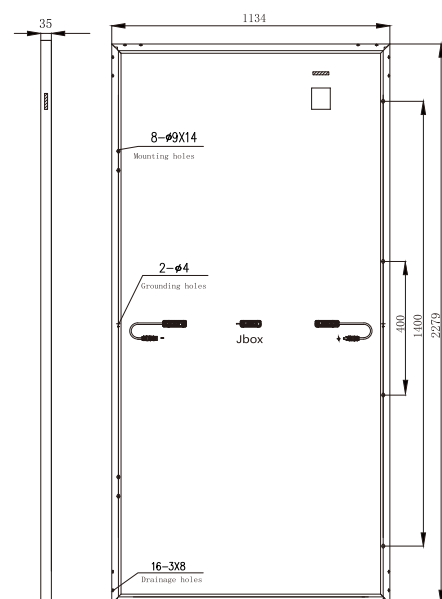

Current--Voltage

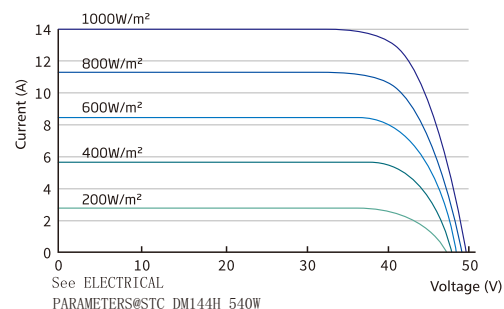

Power--Voltage

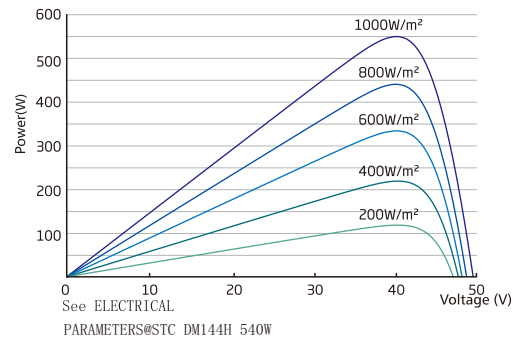

*Power measurement tolerance: ±3%

*No notice when product specifications change

Dealer information

XinYu LDK Power Supply Technology Co.,Ltd

ADD: No. 1950 SaiWei Avenue, High-Tech, Industrial Development Zone, XinYu City, JiangXi Province, P.R. CHINA
Email: modulesales@ldksolar.com