





**ZONERGY**

<https://zonergyglobal.en.alibaba.com>

Monocrystalline Module

200Watt

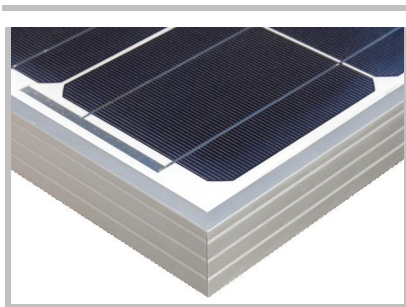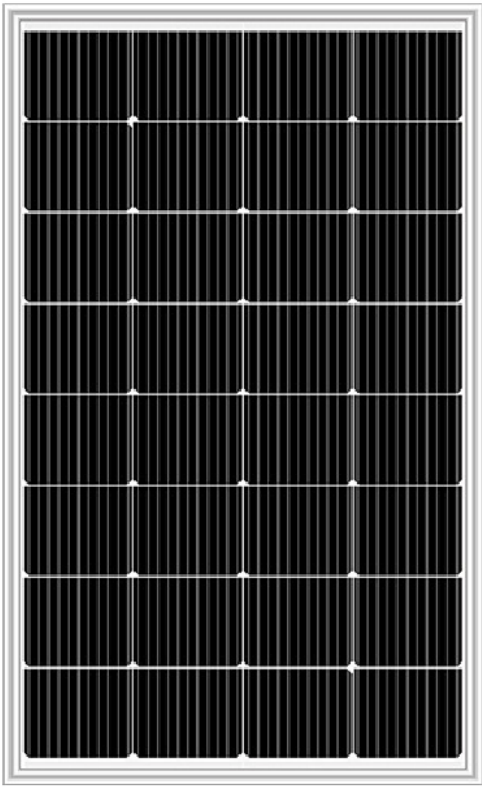

## Model (SP200M) Specifications

### Electrical Data

Maximum Power(W)	200W
Optimum Power Voltage(Vmp)	18.24V
Optimum Operating Current(Imp)	10.96A
Open Circuit Voltage(Voc)	21.8V
Short Circuit Current(Isc)	11.62A
Cell Efficiency (%)	23%
Module Efficiency (%)	22%
Tolerance Wattage(%)	0 +3
NOCT	47°C +/-2°C

### Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.35
Temperature Coefficients of Pm(%)	-0.45
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.35

### Components & Mechanical Data

Solar Cell	182*151.7 Mono
Number of Cell(pcs)	4*8
Size of Module(mm)	1290*760*30/25
Front Glass Thickness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	15
Junction Box Type	Pass the TUV Certificate
Bypass Diode Rating(A)	30
Cable & Connector Type	Pass the TUV Certificate
Frame(Material Corners,etc.)	40#
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25°C

### Benefits



Modules sorted by current, optimizing system power generation



High Efficiency



Stable Power



Low Carbon Emission




Excellent Weather Resistance


Tel: +86 17611368723  
 wang\_taoshui@zonergy.com

# Monocrystalline Module 200Watt


## IV-Curves

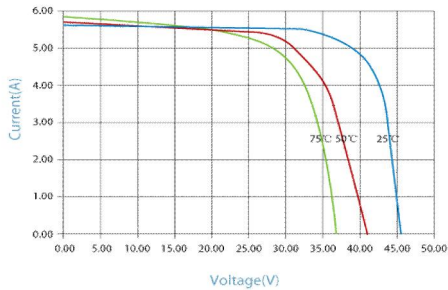

IV-CURVES of PV module  
 SP200M

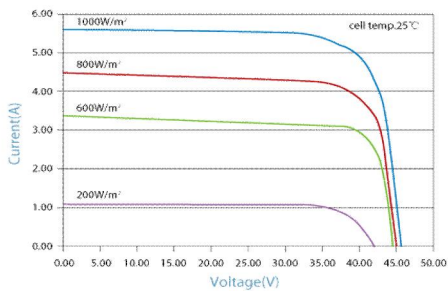

## Engineering Drawings

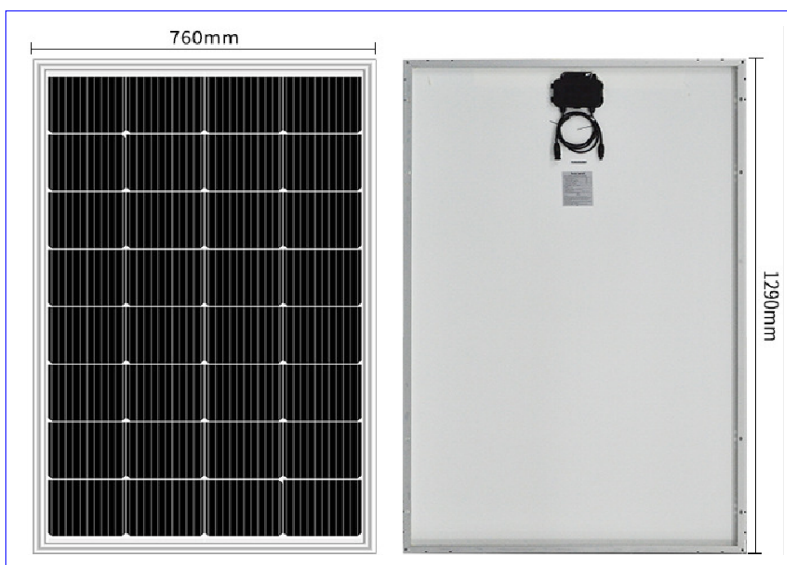

Manufacturing facility certified to **ISO 9001 / ISO 14001 / OHSAS 18001** quality management system standards.

## Warranty & Certifications

Warranty	25 years limited power warranty
	10 years limited product warranty
Certifications	IEC 61215, IEC 61730

## Packing

Packing	2PCS/CTN or Pallet Packing
---------	----------------------------

## Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

## Project Picture

