POLYCRYSTALLINE SILICON | PHOTOVOLTAIC MODULES 80W




## **About APS:**

Australian Premium Solar (APS) is 100% Australian Owned managed and operated. APS supplies imported high quality renewable energy products Our solar panels are manufactured in accordance with APS's high standards of design and Quality Control Which ensure higher PV energy yields.

APS opened an advanced facility in Queensland, Australia for research and development and local testing of solar panels. The 2000 sq. mtr. facility is staffed by qualified engineers, who are dedicated to exploring ways to achieve the continuous improvement of our solar cells and solar modules.

# **12** Years Product Warranty\* | **30** Years Performance Warranty\*

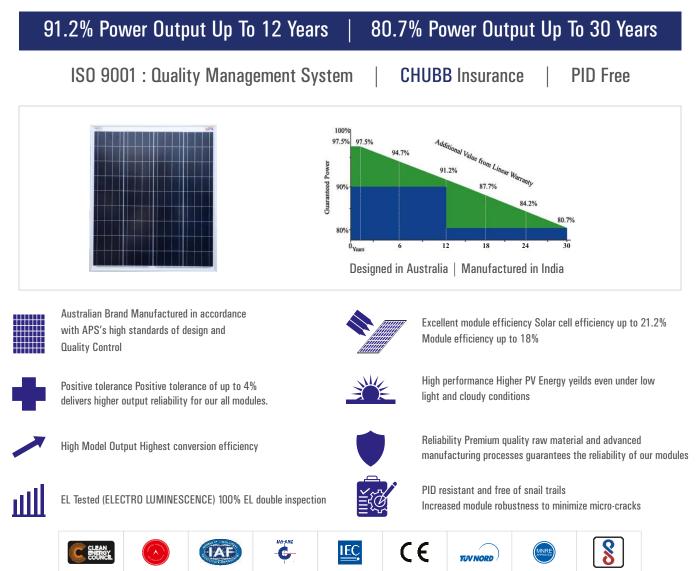

Web: www.australianpremiumsolar.co.in | Email: sales@australianpremiumsolar.co.in

## **ELECTRICAL TYPICAL VALUES**

Model
 Maximum Power (Pmax)
Voltage at max. power (Vmp)
Current at max. power (Imp)
Open Circuit Voltage (Voc)
Short Circuit Current (Isc)
Tolerance
Module Efficiency

APSP6-80/36		
80 W		
18.54 V		
4.31 A		
22.2 V		
4.58 A		
Positive only		
13.44%		

## **MECHANICAL CHARACTERISTICS**

**External Dimensions** Weight

785 x 675 x 35 mm 7.56 kg

**MODULE CHARACTERISTICS** 

Poly

36 Cells

IP65/67 rated

2400 Pascal

5400 Pascal

Low iron, tempered glass, 3.2mm

1.1 x 4.0mm<sup>2</sup> Mc4 compatible / IP 67

Anodized aluminum alloy

80 km/h for 25mm ice ball

## NOTE : STC: Irradiance 1000W/m2 Module Temperature 25°C AM = 1.5

Solar Cells No. of Cells

Glass

Frame

Junction Box

Cable & Plug Connectors


Maximum Snow Load

Maximum Wind Load

Hailstone Impact Test

TEMPERATURE CHARACTERISTICS			
NOCT (Nominal Operation Temperat	ure) : 47 <u>+</u> 2°C		
Temperature Coefficient of Voc (ß)	:-0.35%/°C		
Temperature Coefficient of Isc (a)	: +0.05%/°C		
Temperature Coefficient of Pmax (y	) :-0.45%/°C		
ABSOLUTE MAXIMUM RATING			
Parameter	Values		
Operating Temperature	From -40° to 85°		
Maximum Series Fuse Rating	10 A		
IEC Application Class	IEC 61215,IEC 61730		
	IEC 61701,IEC 62804		
Maximum System Voltage	1000v DC (IEC 61215) 600v (UL 1703)		

#### **MODULE DIMENSION**



#### Note:

- The specifications in this datasheet are subject to change without any notice.
- · The electrical data given here is for reference purpose only.
- Please contact our sales team for any customized solutions. · Please read safety and installation instructions before using the product.
- · Subject to Ahmedabad Jurisdiction.

#### \*Warranty:

Please read APS India warranty documents thoroughly on http://australianpremiumsolar.co.in/warranty/

### **Corporate Office :**

Australian Premium Solar (India) Pvt. Ltd., B-802, 8th Floor, Shapath Hexa, Nr. Sola Bridge, Opp. Gujarat High Court, S. G. Highway, Ahmedabad-380061. Gujarat (India). M.: +91-76220-23258 Email: sales@australianpremiumsolar.co.in Web: www.australianpremiumsolar.co.in

#### Factory-1:

Australian Premium Solar (India) Pvt. Ltd., Plot No. 143, Road No. 4A, GIDC-Kathwada, Ahmedabad-382430. Gujarat (India).

**Toll Free:** 1800-313-5052

#### Factory-2: Australian Premium Solar (India) Pvt. Ltd., At & Post - Tajpur, N.H.-08, Ta - Prantij, Dist - Sabarkantha, Gujarat-383205 (India)

#### **I-V CURVE**

