

## Serie OPzS OpzS Series

La serie de OPzS Ácido-plomo abierto 2V (Solar) de Rekoser ha sido diseñada para un bajo mantenimiento, adecuados para el uso en sistemas solares industriales de tipo medio.

Rekoser OPzS series is a traditional tubular plate flooded battery which offers 20+ years design life according to the standard IEC60896-11.



Model	Voltage (V)	Capacity (Ah) 20Hr	Dimensions				Terminal	Weight kg
			Length mm	Width mm	Height mm	Total Height mm		
RKS2-100	2	100	103	206	354	409	F10	7
RKS2-150	2	150	103	206	354	409	F10	10,5
RKS2-200	2	200	103	206	354	409	F10	13
RKS2-300	2	300	145	206	354	409	F10	17
RKS2-350	2	350	124	206	470	525	F10	20,5
RKS2-420	2	420	145	206	470	525	F10	23,5
RKS2-600	2	600	145	206	645	700	F10	32
RKS2-800	2	800	191	210	645	700	F10	42
RKS2-1000	2	1000	233	210	645	700	F10	51,5
RKS2-1200	2	1200	275	210	645	700	F10	61,5
RKS2-1500	2	1500	275	210	795	850	F10	71
RKS2-2000	2	2000	399	210	771	826	F10	98
RKS2-2500	2	2500	487	212	771	826	F10	13,1
RKS2-3000	2	3000	576	212	771	826	F10	15,5
RKG12-100	12	100	409	176	225	225	F10	42,5
RKG12-150	12	150	522	238	218	218	F10	52,5
RKG12-200	12	200	522	269	220	220	F10	69,5
RKG12-250	12	250	522	269	220	220	F10	74

### Características


- Exceden el estándar especificado en DIN40736 y IEC60896-21.
- Seguridad y fiabilidad.
- Alto rendimiento.

### Features


- Exceden el estándar especificado en DIN40736 y IEC60896-21.
- Security and reliability.
- High performance.

## Características de desempeño Performance characteristics


### CHARGE CHARACTERISTICS

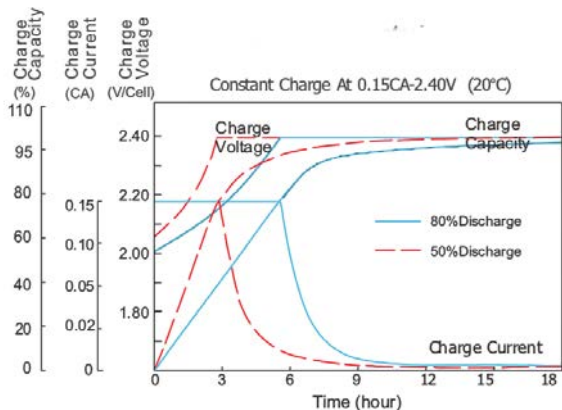


### DISCHARGE CHARACTERISTICS 25°C

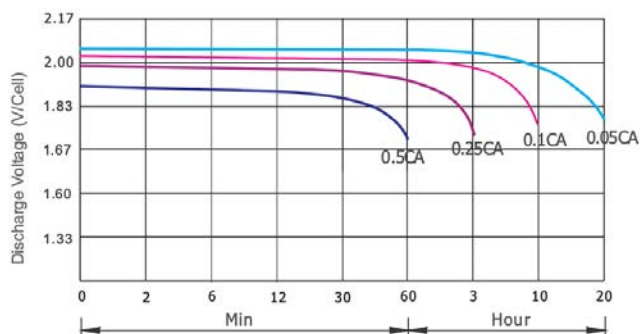


### SELF DISCHARGE CHARACTERISTICS

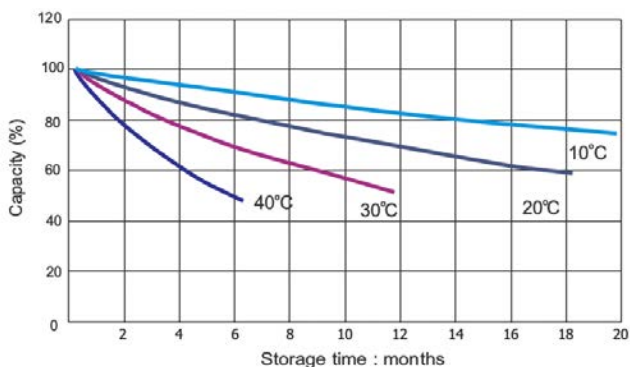

### FLOAT VOLTAGE VS. FLOAT LIFE

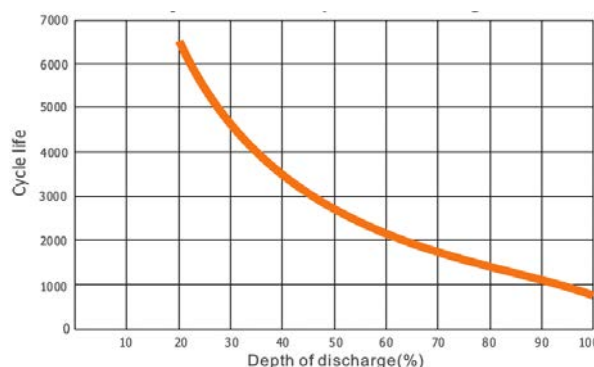

### CYCLE DISCHARGE VOLTAGE CURVE (Test standard BS EN 61427:2005)

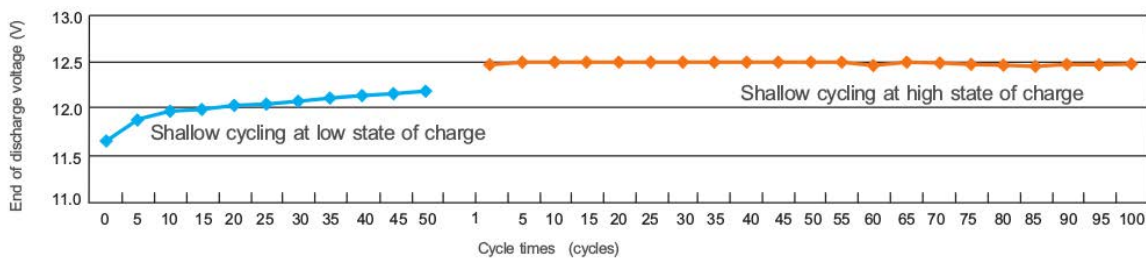

## Certificaciones Certifications

### Complied standards

- IEC60896-11
- DIN40736
- IEC061427
- Eurobat guide, long life
- BS6290 part 4

