

Classic Series

**C6 II · 360-380W
MWT Mono PERC Half-Cut Module**

21.1%

Module efficiency up to 21.1%

Features


- High Efficiency**
With busbar-free design and higher efficiency
- High Reliability**
Conductive back sheet 2D encapsulation without soldering, resulted lower degradation under multiple extreme testing condition
- High ROI**
Higher return on investment with higher power output
- Aesthetic Design**
Busbar-free design, unique and graceful finger pattern on the solar cell surface, customized pattern design also available
- Superior Warranty**
30 MWT single-glass module with 30-year power warranty by LLOYD'S&PICC worldwide
- Lead Free**
Eco-friendly PV design achieves Lead-free without soldering materials

Reinsurance Coverage for 30 Years

12 year
Quality Warranty

30 year
Performance Warranty

Insured by PICC and LLOYD'S

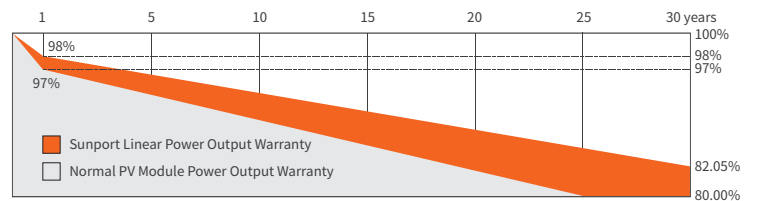

※1st year degradation less than 2%, 30 years linear power output 82% guaranteed.

Comprehensive Qualifications & Certifications

- ★CQC Top Runner Advanced Technology Certification (4A class)
- ★ISO 9001:2015 Quality Management System
- ★ISO 45001: 2018 Occupation Health Safety Management System
- ★TUV NORD Certification
- ★ISO 14001:2015 Environment Management System



Jiangsu Sunport Power Corp., Ltd

Add: No.20, Xishi Road, Xinwu District, Wuxi, China 214028

Email: info@sunportpower.com

Web: www.sunportpower.com

Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP360NHEH	SPP365NHEH	SPP370NHEH	SPP375NHEH	SPP380NHEH
Max-Power(Pm)	W	360	365	370	375	380
Power Tolerance	W			0~+5		
Max-Power Voltage(Vm)	V	35.5	35.7	35.7	35.9	36.1
Max-Power Current(Im)	A	10.15	10.23	10.37	10.45	10.53
Open-Circuit Voltage(Voc)	V	42.9	43.1	43.3	43.5	43.7
Short-Circuit Current(Isc)	A	10.69	10.78	10.87	10.95	11.04
Module Efficiency(ηm)	%	20.0	20.3	20.6	20.9	21.1

STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25°C

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP360NHEH	SPP365NHEH	SPP370NHEH	SPP375NHEH	SPP380NHEH
Max-Power(Pm)	W	269	273	277	281	284
Max-Power Voltage(Vm)	V	33.4	33.6	33.8	34.0	34.2
Max-Power Current(Im)	A	8.06	8.13	8.20	8.27	8.31
Open-Circuit Voltage(Voc)	V	40.4	40.6	40.8	41.0	41.2
Short-Circuit Current(Isc)	A	8.62	8.72	8.80	8.88	8.94

NMOT: Irradiation 800W/m², Ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of Isc	0.06%/°C

Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HC	936 / 988	36



Mechanical Characteristics

Dimension(L×W×H)	1771mmx1015mmx30mm
Weight	20kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	126(21×6) / Mono / 162.75mm(Half-cell)
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP68
Cable	4mm ² , 350mm (+) / 150mm (-); Customizable
Connector	MC4 Compatible

Operating Conditions

Max System Voltage	1500V(TUV)
Max Fuse Rated Current	15A
Operating Temperature Range	-40°C~+85°C
Mechanical Load	5400Pa (front) /2400Pa (rear)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A

I-V Curve

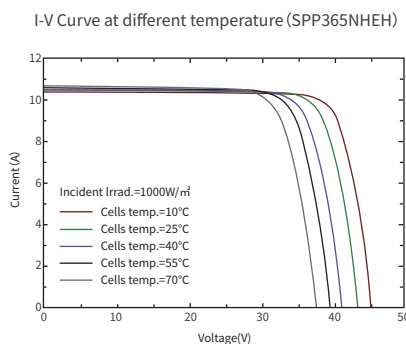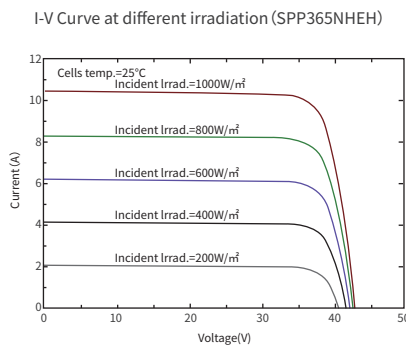

Module Size

