

MonoPower Large Cells

ASP HM6-72 Series 390W-400W

Monocrystalline PV-module



QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



GERMAN ENGINEERING

Best design by the art of German engineering



SAVE INVESTMENT

Product warranty of 12 years and performance warranty of 25 years



POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output




FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa and wind loads up to 2400 Pa


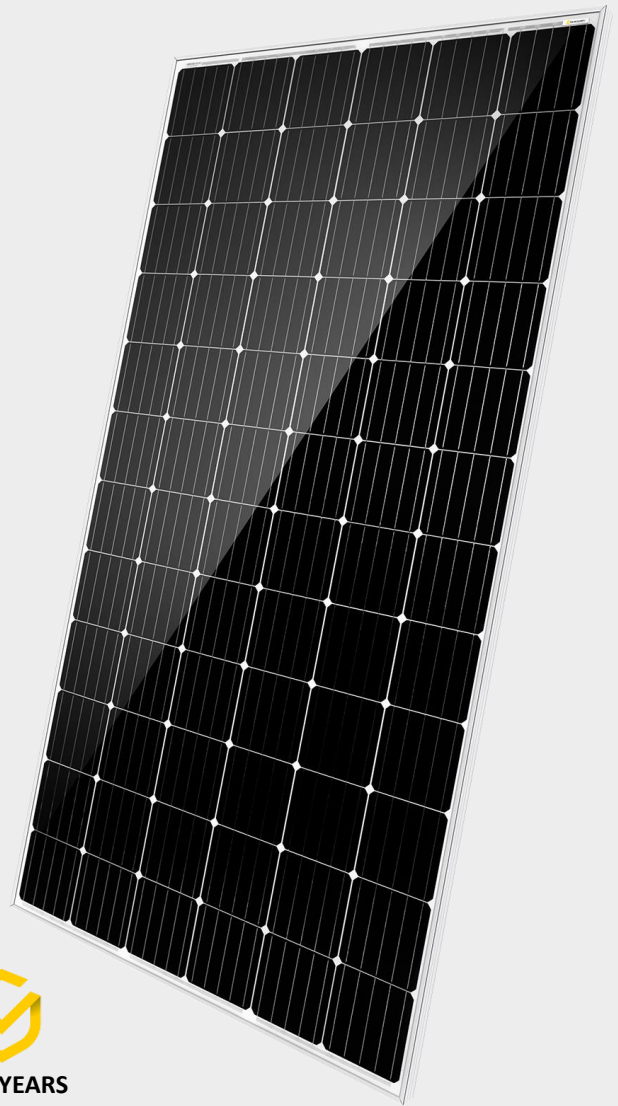


12 YEARS
PRODUCT WARRANTY

OUR PERFORMANCE GUARANTEE



25 YEARS
PERFORMANCE GUARANTEE

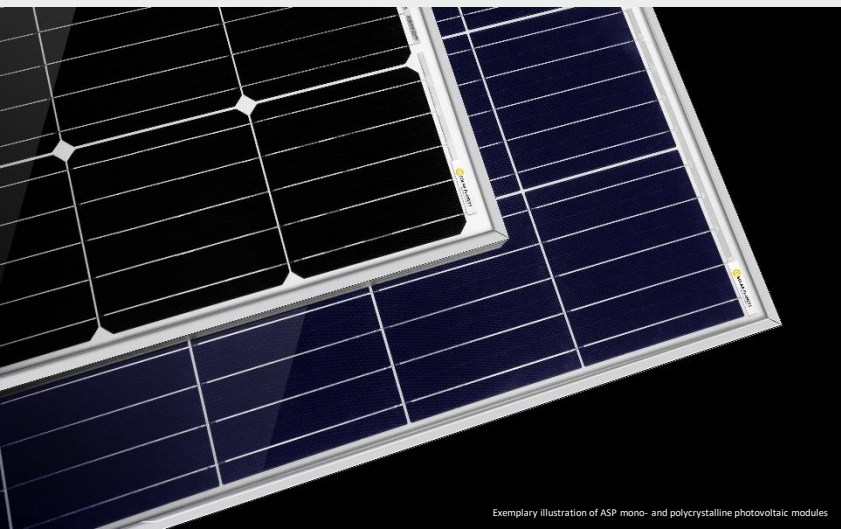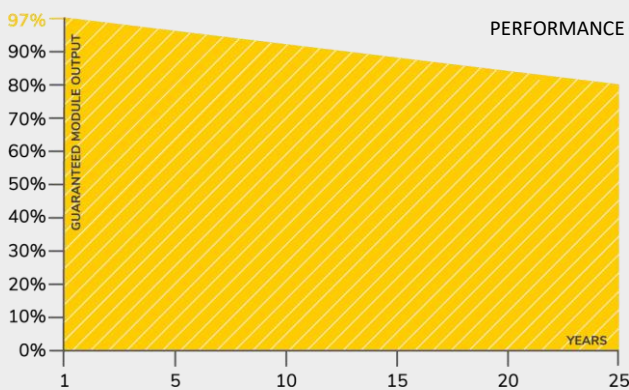

CERTIFICATES

SGS
TÜV
SAAR

IEC 61215
IEC 61730
PERIODICAL
INCEPTION

SGS

PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)

CE CEC

**Quality
Diligence
Durability**

α SOLAR PLANET
Enjoy the quality difference

MonoPower Large Cells

ASP HM6-72 Series 390W-400W

TECHNICAL DATA

ASP390HM6-72

ASP395HM6-72

ASP400HM6-72

Parameter	Unit	ASP390HM6-72	ASP395HM6-72	ASP400HM6-72
Maximum power	P _{max} (Wp)	390	395	400
Maximum power voltage	V _{mp} (V)	41.10	41.40	41.71
Maximum power current	I _{mp} (A)	9.49	9.54	9.59
Open-circuit voltage	V _{oc} (V)	49.30	49.48	49.69
Short-circuit current	I _{sc} (A)	10.12	10.50	10.59
Module efficiency	%	19.67	20.04	20.29
Power tolerance	P _{max} (W)		0/+5	
Maximum system voltage DC	V		1000	
Operating temperature	°C		-40 to +85	
Temperature coefficients of P _{max}	%/°C		-0.37	
Temperature coefficients of V _{oc}	%/°C		-0.28	
Temperature coefficients of I _{sc}	%/°C		0.048	
Nominal operating cell temp. (NOCT)	°C		45±2	

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


MATERIAL CHARACTERISTICS

Cell type	Monocrystalline 158.75 x 158.75 mm
No. of cells	72 (6 x 12)
Dimensions	1979 x 996 x 35 mm
Weight	21.0 kg
Junction box	IP67 rated
Output cable	4.0 mm ² , 1200 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m ²
Mechanical load	5400 Pa / 550 kg / m ²

PACKING INFORMATION

Packing configuration	64 pcs / double pallet
Loading capacity	704 pcs / 40 HQ
Size / pallet	2015 x 1120 x 2395 mm
Weight	1464 kg / double pallet

DRAWINGS

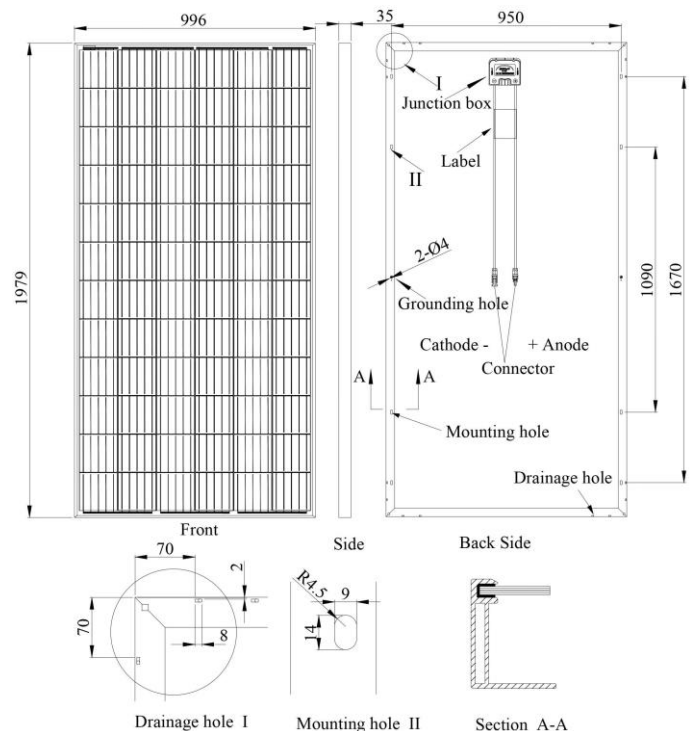

Alpha Solar Planet GmbH
Döllgaststr. 4, 86199 Augsburg
GERMANY

Tel.: +49 821 99972360
Fax: +49 821 99972369

E-mail: sales@a-s-p.solar
Web: www.a-s-p.solar

