LV INTELLIGENT HOUSEHOLD

ENERGY STORAGE SYSTEM

- · Stacked assembly, simple installation, and modular design gives flexibility
- Built-in bidirectional DC-DC converter to help reduce heat generation and meet low power consumption requirements
- High safety, long battery life (up to 8000 cycles)
- Utilize the most advanced dynamic current equalizing technique to ensure the module's high operation reliability and security



RenonXtreme 2.0

Renon Xtreme 2.0 is a new product independently developed by Renon Power integrating cutting-edge technology. Different from the legacy version, Xtreme 2.0 has a built-in bi-directional DC-DC converter, which improve the stability and efficiency of system operation.

Besides, its stacked design enables simple installation and expansion in any home. It supports module selections between 2-6 modules depending on the specific needs. The products adopts a three-level BMS and the self-created EMS platform from Renon that supports remote monitoring, parameter modification, firmware upgrades, and other intelligent functions.







BESS Specification (LV 100Ah)	
Battery module Combination	1P16S
Cell Capacity[Ah]	100*N (N=1~6)
Nominal Energy [kWh]	5.12*N (N=1~6)
Max. Operating Current[A]	≤300
Operating Voltage Range[Vdc]	43~57 (Settable)
Default Operating Voltage [Vdc]	54 (Constant voltage)
Cycle Life[times]	8000

General Parameters (LV 100Ah)	
Dimensions(mm)	635(W)*268(T)*1200(H) @4 modules
Total Weight(Kg)	246 @4 modules
Enclosure	IP65
Operating Temperature	-20°C to 50°C
Recommended Temperatur	re 0°C to 30°C
Storage Conditions	-20°C to 55°C (-10°C to 40°C Recommended) Up to 90% RH, non-condensing State of Energy (SoE): 50% initial
Operating Humidity (RH)	Up to 95%, non-condensing
Maximum Elevation	3000 m (9843 ft)
Environment	Indoor and outdoor rated
Noise Level @1m	< 40 dB(A) optimal, < 60 dB(A) maximum

System Layout

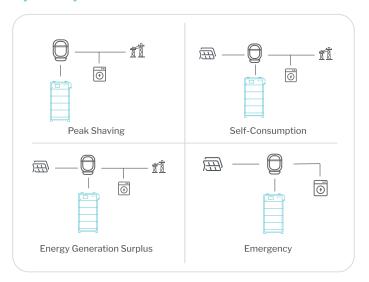

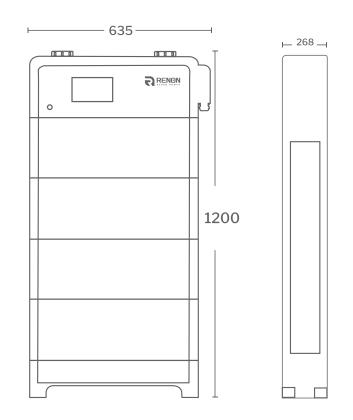

BESS Certifications	UL1973,UL9540A,IEC62619,UN 38.3
Communication Interface	CAN, Wi-Fi
Warranty	5Years + 5Years