

MonoPower

Superior Shingled

ASP SG Series 465W-475W

Shingled monocrystalline PV-module



QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



GERMAN ENGINEERING

Best design by the art of German engineering



SAVE INVESTMENT

Product warranty of 12 years and performance warranty of 25 years



POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output



FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



STABLE AND STRONG


Capable to bear heavy snow loads up to 5400 Pa and wind loads up to 2400 Pa

OUR PERFORMANCE GUARANTEE



25 YEARS

PERFORMANCE GUARANTEE

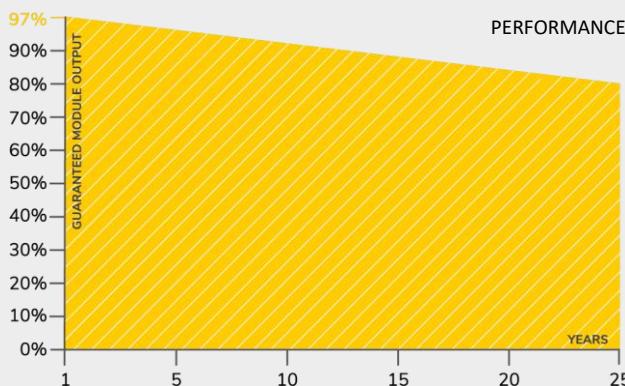

12 YEARS

PRODUCT WARRANTY

CERTIFICATES



CB

SOLAR PLANET
Enjoy the quality difference

MonoPower Superior Shingled Module

ASP SG Series 465W-475W

TECHNICAL DATA


| | | ASP-SG-465W | ASP-SG-470W | ASP-SG-475W |
|--------------------------------------------|-----------|-------------|-------------|-------------|
| Maximum power | Pmax (Wp) | 465 | 470 | 475 |
| Maximum power voltage | Vmp (V) | 40.9 | 40.9 | 41.0 |
| Maximum power current | Imp (A) | 11.37 | 11.49 | 11.59 |
| Open-circuit voltage | Voc(V) | 49.4 | 49.4 | 49.5 |
| Short-circuit current | Isc (A) | 12.03 | 12.07 | 12.12 |
| Module efficiency | % | 20.7 | 20.9 | 21.2 |
| Power tolerance | Pmax (W) | | 0/+5 | |
| Maximum system voltage DC | V | | 1500 | |
| Operating temperature | °C | | -40 to +85 | |
| Temperature coefficients of Pmax | %/°C | | -0.34 | |
| Temperature coefficients of Voc | %/°C | | -0.27 | |
| Temperature coefficients of Isc | %/°C | | 0.04 | |
| Nominal operating cell temp. (NOCT) | °C | | 42.3±2 | |

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.

MATERIAL CHARACTERISTICS

| | |
|------------------------|----------------------------------------|
| Cell type | PERC monocrystalline 158.75 x 158.75mm |
| Dimensions | 1969 x 1140 x 35 mm |
| Weight | 24.5 kg |
| Junction box | IP68 rated |
| Output cable | 4.0 mm ² , 1200 mm length |
| Connector type | MC4 / MC4 compatible |
| Hail resistance | Max. Ø 25 mm, at 23 m/s |
| Wind load | 2400 Pa / 244 kg / m ² |
| Mechanical load | 5400 Pa / 550 kg / m ² |

DRAWINGS

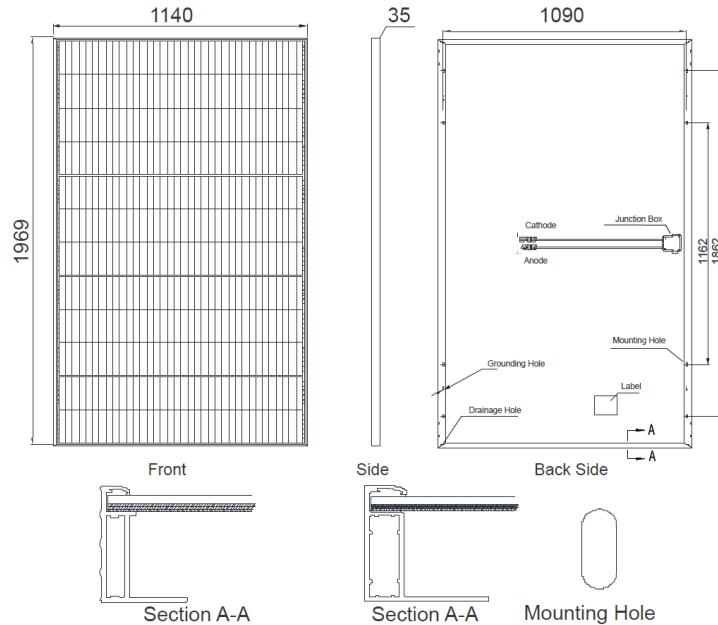

PACKING INFORMATION

| | |
|------------------------------|------------------------|
| Packing configuration | 62 pcs / double pallet |
| Loading capacity | 682 pcs / 40 HQ |
| Size / pallet | 2000 x 1135 x 2490mm |
| Weight | 1640 kg / pallet |



Alpha Solar Planet GmbH
Schwalbenweg 1 g, 86343 Königsbrunn
GERMANY

Tel.: +49 8231 99190 70
Fax: +49 8231 9919089

E-mail: sales@a-s-p.solar
Web: www.a-s-p.solar

