


460W MBB

Mono Crystalline Half-cell Module

RT144M-HS-445~460W

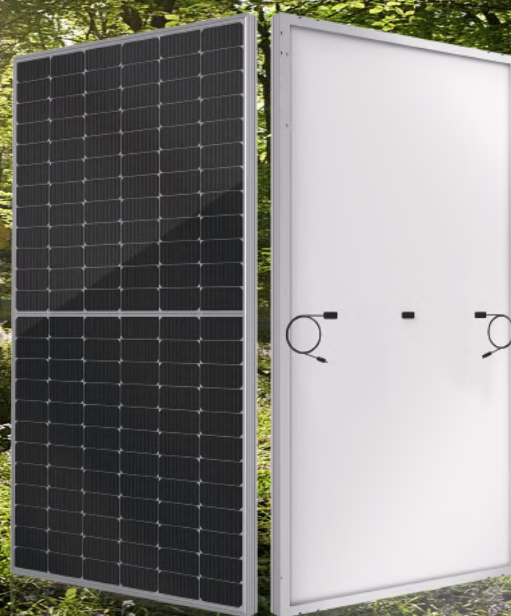

● M6 SERIES

Ritech Solar redefined the high-efficiency module series by integrating 166mm silicon wafers with multi-busbar and half-cut cell technologies. Ritech Solar panel combined creative technology effectively and extremely improved the module efficiency and power output.

● KEY FEATURES

-  New circuit design, lower internal current, less mismatch to get more power
-  Less power loss by minimizing the shading impact
Significantly lower the risk of hot spot
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent environment condition:
 - Sand, acid, salt and hail stones
 - 2400 Pa wind load and 5400 Pa snow load
 - Anti-PID


● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001

● PRODUCT CERTIFICATION



● WARRANTY

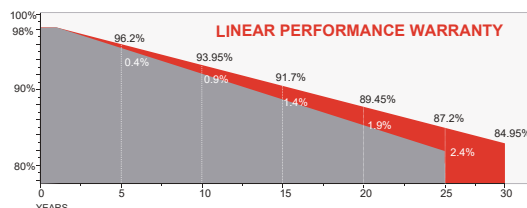

Guarantee on product material and workmanship



Linear power output warranty

RITECH SOLAR CO., LTD

Add: No. 8-1, Yanfeng Road, Yanqiao Street, Huishan District, 214000, Wuxi, China
Tel: +86-18001516299 Email: info@ritechsolar.com

Electrical Characteristics

Module Type	RT144M-HS-440		RT144M-HS-445		RT144M-HS-450		RT144M-HS-455	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power at STC (Pmp)	440	330	445	334	450	338	455	342
Open Circuit Voltage (Voc)	49.7	46.4	49.9	46.6	50.1	46.8	50.3	47.0
Short Circuit Current (Isc)	11.27	9.11	11.34	9.17	11.41	9.22	11.48	9.28
Maximum Power Voltage (Vmp)	41.4	38.3	41.6	38.5	41.8	38.7	42.0	38.9
Maximum Power Current (Imp)	10.63	8.62	10.70	8.68	10.77	8.73	10.84	8.80
Module Efficiency at STC(ηm)	20.24		20.47		20.70		20.93	
Power Tolerance	(0, +4.99)							
Maximum System Voltage	1500V DC							
Maximum Series Fuse Rating	20 A							

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5
Power measurement tolerance: +/-3%

Temperature Characteristics


Pmax Temperature Coefficient	-0.34 %/°C
Voc Temperature Coefficient	-0.26 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Mechanical Specifications

External Dimensions	2094 x 1038 x 30 mm
Weight	23.0 kg
Solar Cells	PERC Mono 166 x 83mm (144 pcs)
Front Glass	3.2mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm ² , 300mm(+)/300mm(-) or Customized Length
Mechanical Load	Front side 5400Pa/ Rear side 2400Pa

Packing Configuration

	2094 x 1038 x 35 mm	
Container	20'GP	40'HQ
Pieces per Pallet	36+4*	36+2*
Pallets per Container	5	22
Pieces per Container	200	836

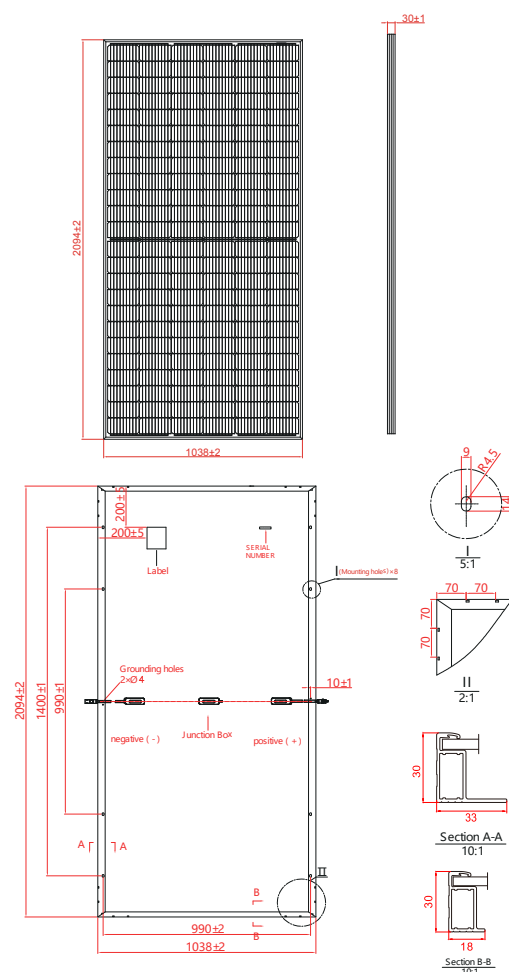

I-V Curve

