

# S1-390-72M

**390W**

Highest power output

**19.64%**


Module efficiency

**12 years**

Material & Workmanship warranty


**25 years**

Linear power output warranty

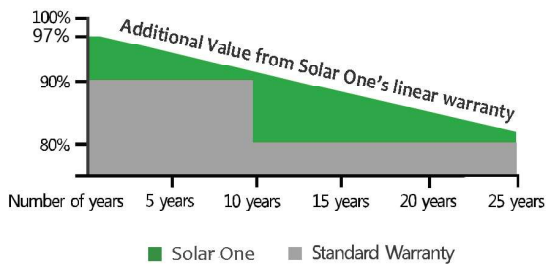

S1-385-72M

S1-390-72M  
S1-380-72M

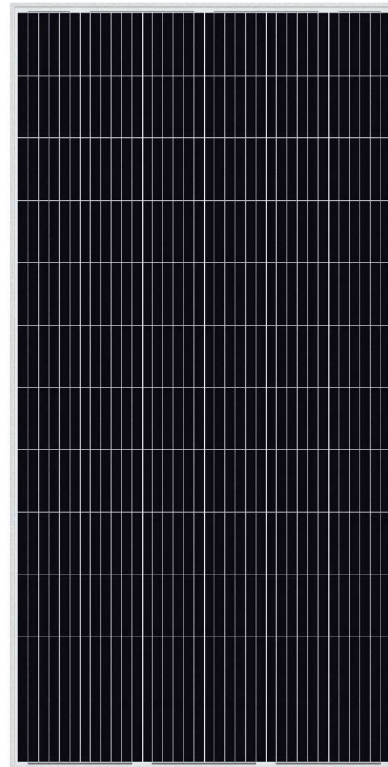

PID-free



World class mono efficiency



Tighter product performance distribution reduces the mismatch power loss in system operation



Positive tolerance offer



Good temperature coefficient enables higher output in high temperature regions



Excellent performance under low light conditions



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa

## Electrical Characteristics at Standard Test Conditions(STC)

Module Type	S1-390-72M	S1-385-72M	S1-380-72M
Maximum Power - Pmax (W)	390	385	380
Open Circuit Voltage - Voc (V)	48.9	48.7	48.5
Short Circuit Current - Isc (A)	10.18	10.09	10.01
Maximum Power Voltage - Vmpp (V)	40.4	40.2	40
Maximum Power Current - Imp (A)	9.66	9.58	9.51
Module Efficiency	19.64%	19.39%	19.13%

Standard Test Conditions (STC): irradiance 1,000 W/m<sup>2</sup>; AM 1.5; Cell temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

## Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	S1-390-72M	S1-385-72M	S1-380-72M
Maximum Power - Pmax (W)	288.3	284.5	281
Open Circuit Voltage - Voc (V)	45.2	45	44.8
Short Circuit Current - Isc (A)	8.23	8.15	8.09
Maximum Power Voltage - Vmpp (V)	37.2	37.1	36.9
Maximum Power Current - Imp (A)	7.74	7.67	7.61

Normal Operating Cell Temperature( NOCT) : irradiance 800W/m<sup>2</sup>; wind speed 1 m/s, ambient temperature 20°C. Measuring Tolerance: ±3%.

## Temperature Characteristics

NOCT	45/°C ( ±2/°C )
Voltage Temperature Coefficient	-0.29%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.39%/°C

## Maximum Ratings

Maximum System Voltage [V]	1000
Series Fuse Rating [A]	20

## Material Characteristics

Dimensions	1982×1002×40mm (L×W×H)
Weight	22.4kg
Frame	Anodized aluminum profile
Front Glass	White toughened safety glass, 3.2 mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Sheet	Composite film
Cells	6×12 pieces monocrystalline solar cells series strings
Junction Box	IP≥67, 3 diodes
Cable&Connector	Length 1200 mm, 1×4 mm <sup>2</sup> , compatible with MC4


## Packaging

Dimensions(L×W×H)	2010×1125×1132mm
Container20'	270
Container40'	594
Container40'HC	649

## System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s-1
Maximum Surface Load	5,400 Pa
Application class	Class A

## Dimensions

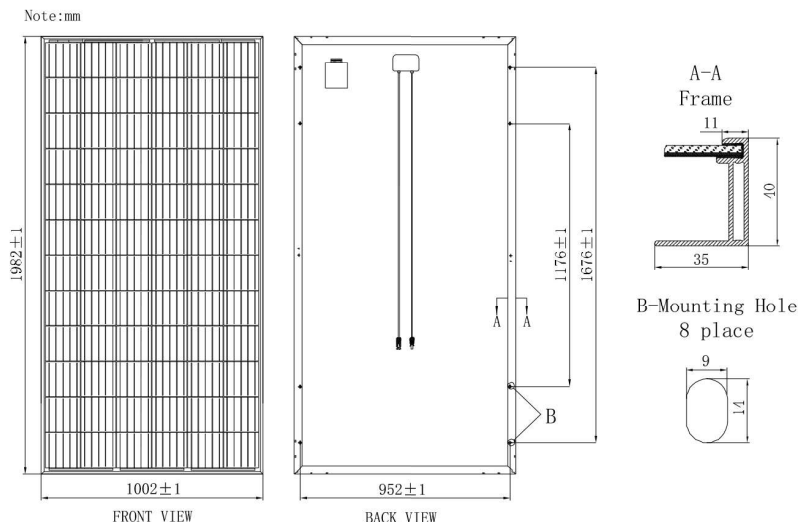

## IV-Curves

