

PolyPower Basic

ASP P6-60 Series 275W-290W

Polycrystalline PV-module



QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



GERMAN ENGINEERING

Best design by the art of German engineering



SAVE INVESTMENT

Product warranty of 12 years
and performance warranty of 25 years



POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output




FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa
and wind loads up to 2400 Pa

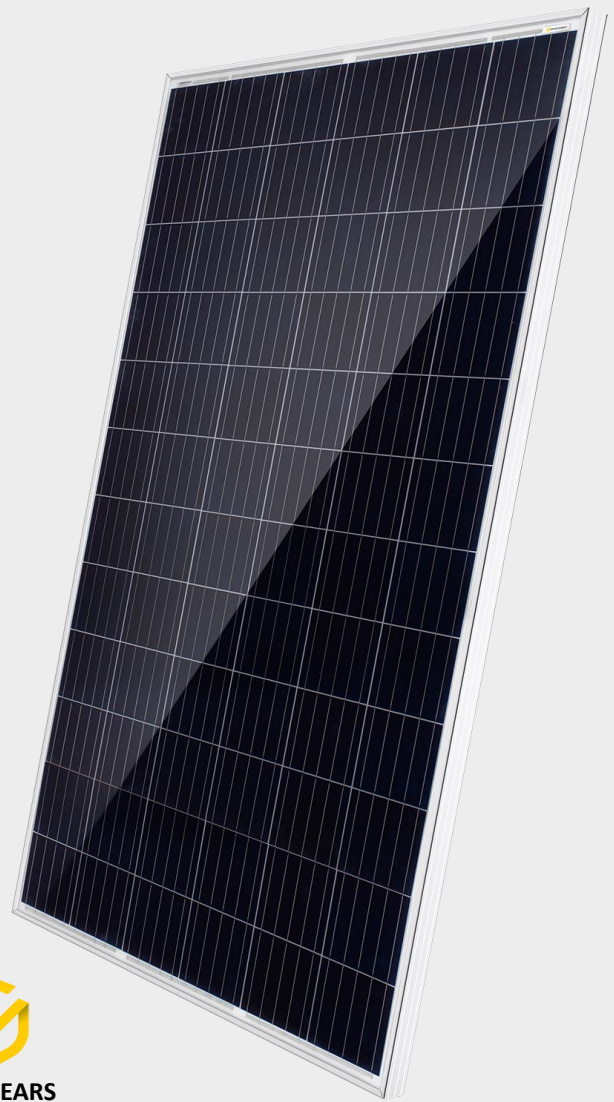

12 YEARS

PRODUCT WARRANTY


Exemplary illustration of ASP P6-72

OUR PERFORMANCE GUARANTEE



25 YEARS

PERFORMANCE GUARANTEE

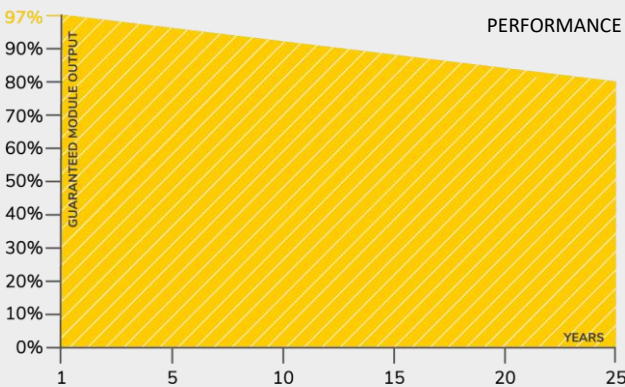

CERTIFICATES



IEC 61215
IEC 61730
PERIODICAL
INCEPTION



PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)



**Quality
Diligence
Durability**



Exemplary illustration of ASP mono- and polycrystalline photovoltaic modules

PolyPower Basic Module

ASP P6-60 Series 275W-290W

TECHNICAL DATA

		ASP275P6-60	ASP280P6-60	ASP285P6-60	ASP290P6-60
Maximum power	P _{max} (Wp)	275	280	285	290
Maximum power voltage	V _{mp} (V)	31.24	31.65	32.07	32.48
Maximum power current	I _{mp} (A)	8.80	8.85	8.89	8.93
Open-circuit voltage	V _{oc} (V)	38.52	38.72	38.93	39.14
Short-circuit current	I _{sc} (A)	9.35	9.38	9.44	9.47
Module efficiency	%	16.80	17.26	17.41	17.72
Power tolerance	P _{max} (W)		-0/+5		
Maximum system voltage DC	V		1000		
Operating temperature	°C		-40 to +85		
Temperature coefficients of P _{max}	%/°C		-0.40		
Temperature coefficients of V _{oc}	%/°C		-0-31		
Temperature coefficients of I _{sc}	%/°C		0.05		
Nominal operating cell temp. (NOCT)	°C		45±2		

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


MATERIAL CHARACTERISTICS

Cell type	Polycrystalline 156.75 x 156.75 mm
No. of cells	60 (6 x 10)
Dimensions	1650 x 992 x 35 mm
Weight	17.5 kg
Junction box	IP67 rated
Output cable	4 mm ² , 900 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 28 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m ²
Mechanical load	5400 Pa / 550 kg / m ²

PACKING INFORMATION

Packing configuration	64 pcs / double pallet
Loading capacity	896 pcs / 40 HQ
Size / pallet	1690 x 1135 x 2390 mm
Weight	1220 kg / pallet

DRAWINGS

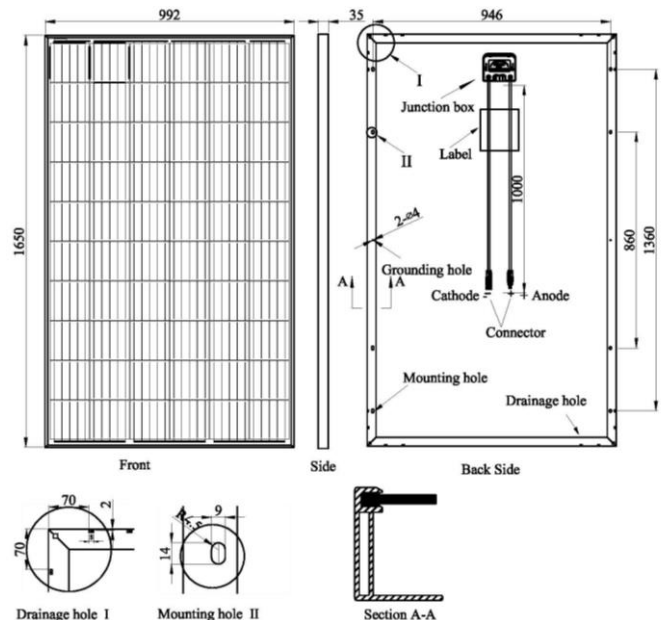

Alpha Solar Planet GmbH
Döllgaststr. 4, 86199 Augsburg
GERMANY

Tel.: +49 821 99972360
Fax: +49 821 99972369

E-mail: sales@a-s-p.solar
Web: www.a-s-p.solar

