



Series	AGM-S	Warranty	See Warranty Terms
Volts	6	BCI	GC2
Cells	3		
Terminal Type	M8 incl. TP08		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	75 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	1.3 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	960
Marine Crank Amps (MCA) 32°F / 0°C	1100
Reserve Capacity (RC @ 25A)	531 Minutes
Reserve Capacity (RC @ 75A)	135 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>275 AH</b>	<b>2.75 A</b>
@ 20 Hour Rate	<b>250 AH</b>	<b>12.5 A</b>
@ 10 Hour Rate	<b>229 AH</b>	<b>22.9 A</b>
@ 5 Hour Rate	<b>204 AH</b>	<b>40.8 A</b>

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	136.1	78.5	56.6	39.7	27.2	22.5


### Specifications

	Weight	34.5 kg	76 lbs
	Length	26.2 cm	10.31"
	Width	18.1 cm	7.13"
	Height Inc. Term.	27.3 cm	10.75"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	Nylon Strap

### Cycle Life vs. Depth of Discharge

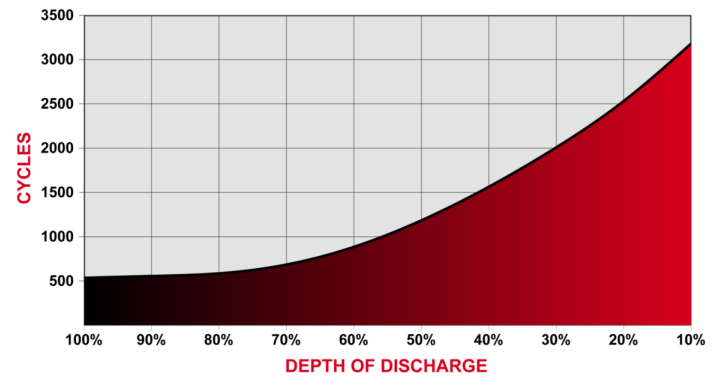

### Capacity vs. Temperature

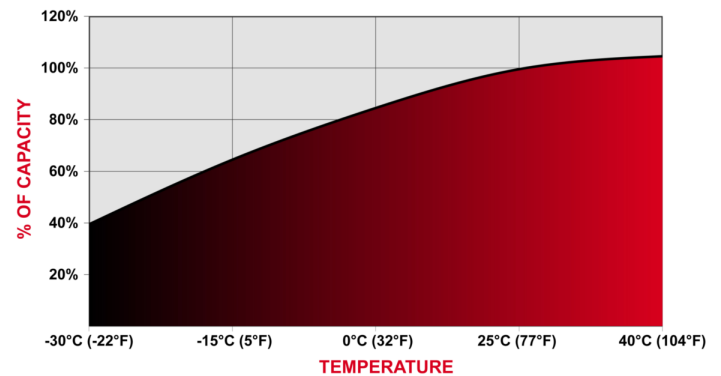

### Detailed Illustration

