

Key Features

- 5. Power output : Positive tolerance of up to 5W
- 2. 100%EL 2 times-inspection ensures modules are defect free
- 25. 25 year irrevocable warranty insurance-Solarsafe
- Anti-reflective and self-cleaning surface reduces power loss from dirt and dust
- Certified to withstand increased snow loads of up to 5400Pa and wind loads of up to 2400Pa
- High performance and power output in low solar irradiation
- High salt and ammonia resistance certified by TUV Nord
- 315. Top-Ranking in STS Long-term Test

Comprehensive Certificates

- IEC61215, IEC61730, UL1703,
- TUV, UL, PV Cycle, JET, INMETRO, CEC, MCS, CE, IEC
- ISO9001:2008
- ISO14001:2004
- OHSAS 18001:1999

Superior Warranty



25-year Linear Power Output Warranty

Electrical Parameters@STC

Pmax (W)	Umpp (V)	Impp (A)	Uoc (V)	Isc (A)	FF	Module Efficiency	Max System Voltage	Max Series Fuse
310	37.13	8.36	44.99	8.97	76.83%	16.49%	1000V	15A
315	37.37	8.43	45.04	9.08	77.03%	17.01%	1000V	15A
320	37.52	8.53	45.17	9.16	77.35%	17.05%	1000V	15A
325	37.75	8.61	45.30	9.26	77.48%	17.08%	1000V	15A

Temperature Coefficient

Temperature Cycling Range : -40°C ~ +85°C
 Nominal Operating Cell Temperature : 46±2 °C
 Temperature Coefficient of Isc : 0.044%/°C
 Temperature Coefficient of Voc : -0.317%/°C
 Temperature Coefficient of Pmax : -0.423%/°C

Mechanical Data

Module Dimension : 1956×992×40mm
 Weight : 23.5kg
 Snow/Wind Load : 5400/2400 Pa
 Number of Cells : 72pcs
 Thickness of Glass : 4.0mm
 Junction Box : IP67, 3 Diodes
 Connector : MC4 Compatible, IP67



Guarantee

10-year warranty on materials & workmanship
 25-year linear power output warranty

Packaging Configuration

Modules Per Pallet: 27pcs
 Modules Per 40' HQ : 594pcs

310W Poly Module I-V Curve

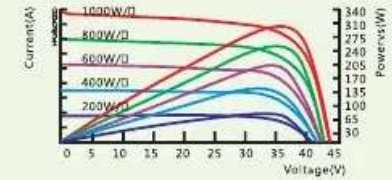

STC: Irradiance 1000W/m² Temperature 25°C AM=1.5
 NOCT: Irradiance 800W/m² Temperature 20°C Wind Speed 1m/s



To create value to customers

To create value to customers

(310-325W) Poly / 4 Busbar / 72pcs

