

HIGH PERFORMANCE. MONO CRYSTALLINE PERC MODULE.



NST72-6-360-380Wp-PERC-S-10.

HIGHEST PERFORMANCE THROUGH STATE-OF-THE-ART CELL TECHNOLOGY



NST ADVANTAGE.

- » PERC (Passivated Emitter Rear Cell) solar cell technology Up to 20.5% efficiency
- » Positive tolerance 0 to +3%
- » Excellent PID resistance
- » More flexibility in design and less BOS costs
- » 1000VDC system voltage



PERC Technology

PERC SOLAR CELL

PERC panels have a higher energy density per square foot and perform well under high temperatures.



Conversion

HIGH EFFICIENCY

High module conversion efficiency up to 20.5% through innovative manufacturing technology.



Low Light

LOW-LIGHT PERFORMANCE

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



2400 Pa | 5400 Pa

SEVERE WEATHER RESILIENCE

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Resistant

DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS

High salt mist and ammonia resistance certified by KIWA.



Performance

25-YEARS LINEAR PERFORMANCE WARRANTY

12-years limited warranty for materials and workmanship. NST guarantees that each module shall deliver the following minimum output as shown in the datasheet for.

About NOOR Solar Technology (NST)

NST is a leading provider and manufacturer of smart energy solutions with high performance and top quality standards. NST products are ideal for utility-scale PV power plants, as well as residential and commercial rooftop installations. NST and its trusted technology partners provide innovative renewable energy solutions meeting the highest standards in terms of reliability, safety and durability – guaranteed by one of the world-leading re-insurance groups. With NST's premium products, investors and owners enjoy long-term returns on investment and savings on their electricity bill.



PREMIUM PRODUCTS – PREMIUM RESULTS!

Noor Solar Technology Factory | Dubai Investment Park 1 | Main Street 86, Street 76
TEL (971) 4 8811 118 | info@noorsolartechnology.com | www.noorsolartechnology.com

HIGH PERFORMANCE. MONO CRYSTALLINE PERC MODULE.



NST72-6-360-380Wp-PERC-S-10.

ENGINEERING DRAWINGS & TECHNICAL PARAMETERS

PHYSICAL PARAMETERS

Solar Cell	Mono-crystalline PERC 156.75 x 156.75 mm
Cell Configuration	72 cell (12 x 6)
Module Dimension	1956 x 992 x 34 mm
Weight	24 kg
Superstrate	3.2 mm, High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Backsheet
Frame	Silver Anodized Aluminum Alloy Type 6063T5, Silver Color
J-Box	IP67, 1000VDC, 3 Bypass Diodes
Cables	4.0 mm (12AWG), 1200 mm Length (Customer Demand)
Connector	IP67 MC4 Compatible

ELECTRICAL PARAMETERS (STC)

TYPE	NST72-6-360M	NST72-6-365M	NST72-6-370M	NST72-6-375M	NST72-6-380M
Rated Maximum Power at STC (Wp)	360	365	370	375	380
Open Circuit Voltage Voc (V)	48.0	48.2	48.5	48.7	48.9
Maximum Power Voltage Vmpp (V)	39.5	39.7	39.9	40.2	40.5
Short Circuit Current Isc (A)	9.51	9.57	9.61	9.68	9.75
Maximum Power Current Impp (A)	9.12	9.20	9.28	9.33	9.39
Module Efficiency (%)	18.55	18.81	19.07	19.32	19.58

STC: Irradiance 1000W/m², Cell Temperature 25°C, air mass 1.5

ELECTRICAL PARAMETERS (NOCT)

TYPE	NST72-6-360M	NST72-6-365M	NST72-6-370M	NST72-6-375M	NST72-6-380M
Max Power Pmax (Wp)	270	274	278	282	286
Open Circuit Voltage Voc (V)	46.5	46.8	47.0	47.2	47.5
Max Power Voltage Vmpp (V)	37.7	37.9	38.1	38.3	38.6
Short Circuit Current Isc (A)	7.61	7.68	7.75	7.82	7.88
Max Power Current Impp (A)	7.17	7.24	7.30	7.36	7.42

NOCT: Under Normal Operating Cell Temperature, Irradiance of 800 W/m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s


TEMPERATURE COEFFICIENT AND PARAMETERS

Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of Pmax	-0.39%/°C
Temperature Coefficient of Voc	-0.32%/°C
Temperature Coefficient of Isc	0.055%/°C
Operating Temperature	-45°C~+85°C
Maximum System Voltage	1000VDC
Limiting Reverse Current	15A
Maximum Series Fuse Rating	15A
Power Tolerance (W)	0 to +3%
Application Class	Class A
Wind and Snow Front Load	Up to 5,400 Pa
Wind Back Load	2,400 Pa



PACKAGING CONFIGURATION

	40ft	20ft
Number of Modules per Container	720	300
Number of Modules per Pallet	30	30
Number of Pallets per Container	24	10
Box Dimension (L x W x H) in mm	1956 x 1100 x 1250	1956 x 1100 x 1250
Box Gross Weight (Kg)	680	680

DIMENSION OF PV MODULE UNIT

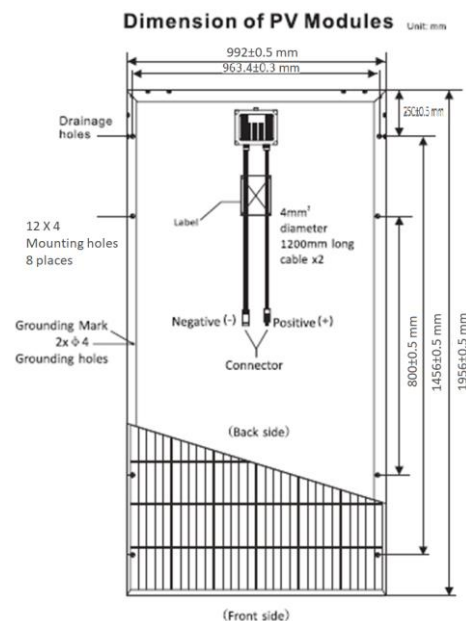

I-V CURVE

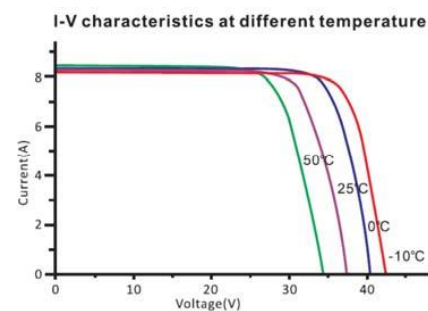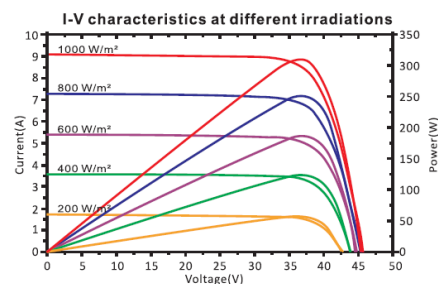

AUTHORIZED PARTNER OF NST

