



# Premiumline

## Perc Mono G1 120 Cells Solar Panel

GSM - 325W 330W 335W 340W 345W-H

GermanSolar is a specialist in customization, utilizing colored glass, frames, and back-sheet material and shapes to expertly match your ideas with the prospective application. With innovative technology and design, GermanSolar offers high-quality modules with enhanced aesthetic appearance for building structures and facades. By providing outstanding customization options, GermanSolar supports your required project needs with colored and shaped panels of your choice and advises you to choose the right size, thickness, shape, and color to compliment the design of your application and your building.

### FEATURES



Best price-performance ratio



Fully automated production line with German quality engineering and design standards



Withstands wind loads up to 2400Pa / heavy snow loads up to 5400Pa



Positive power of up to +5.00 Wp



Better performance in diffused sunlight and high temperature




12-year limited product warranty



EL tested and micro cracks inspected



High ammonia & salt mist resistant certified, and PID-free



25-year linear performance warranty

### PRODUCT CERTIFICATES



Class I Division II Groups A, B, C & D



## Premiumline

Electrical Data					
Nominal Max. Power (P <sub>max</sub> )*	325W	330W	335W	340W	345W
Open Circuit Voltage (V <sub>oc</sub> )	40.74	40.92	40.92	41.1	41.3
Short Circuit Current (I <sub>sc</sub> )	10.05	10.11	10.2	10.26	10.3
Max. Power Voltage (V <sub>mpp</sub> )	34.8	34.98	35.16	35.45	35.75
Max. Power Current (I <sub>mpp</sub> )	9.34	9.44	9.53	9.59	9.65
Module Efficiency (%)	19.26	19.56	19.85	20.15	20.45
Power Tolerance	0 ~ +5W				
Temperature Coefficient (P <sub>max</sub> )	-0.35% / °C				
Temperature Coefficient (I <sub>sc</sub> )	+0.04% / °C				
Temperature Coefficient (V <sub>oc</sub> )	-0.25% / °C				

\* STC: Irradiance 1000W/m, Cell Temperature 25°C, Air Mass AM1.5.

Electrical Data, NMOT *					
Nominal Max. Power (P <sub>max</sub> )	246W	250W	254W	258W	262W
Open Circuit Voltage (V <sub>oc</sub> )	38.50	38.60	38.91	39.05	39.48
Short Circuit Current (I <sub>sc</sub> )	8.02	8.11	8.18	8.25	8.30
Max. Power Voltage (V <sub>mpp</sub> )	32.71	32.88	33.05	33.32	33.61
Max. Power Current (I <sub>mpp</sub> )	7.52	7.60	7.67	7.73	7.78
NMOT (Nominal Module Operating Temperature)	41°C ± 3°C				


\* NMOT: Irradiance at 800W/m, Ambient Temperature 20°C, Wind Speed 1m/s.

Mechanical Data	
Dimensions	1684 x 1002x 35mm (66.30x 39.45x 1.38inches)
Weight	18.0kg (39.68lb)
Solar Cell	Perc monocrystalline G1
Front glass	3.2mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Frame	Anodized aluminium alloy, original or black
Junction Box	IP68, 3 diodes
Cable	4 mm <sup>2</sup> (IEC), 12AWG (UL), 350mm
Connector	MC4 or MC4 compatible
Application Classification	Class A
Module Fire Performance	Type 1 (UL 1703) or Class C (IEC 61730)

Operating Conditions	
Max. System Voltage	1500V (IEC/UL) or 1000V (IEC/UL)
Operating Temperature	-40°C ~ +85°C
Max. Series Fuse Rating	25A
Front Side Maximum Static Loading/ Rear Side Maximum Static Loading	5400 Pa/2400 Pa



Packaging	
Standard packaging	30pcs /pallet
Module quantity per 20' container	360pcs
Module quantity per 40' container	780pcs /40' HQ container

### Design (mm)

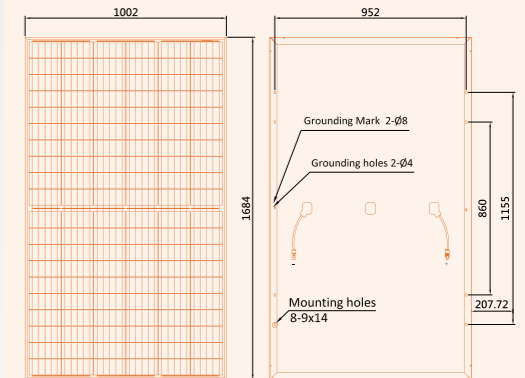


Front View


Back View



### GSM-335W-H I-V CURVES

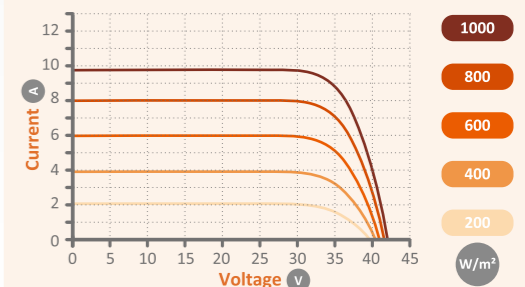

### GSM-335W-H P-V CURVES

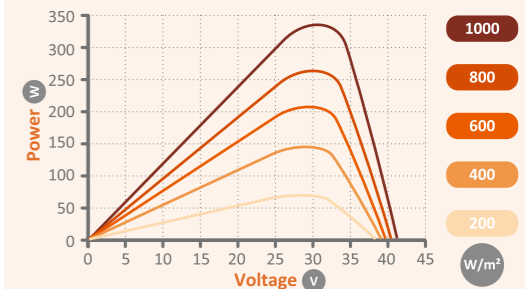

### LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty | 25 years Linear Power warranty

