

Classic Series

**C7 II · 445-465W
MWT Mono PERC Half-Cut Module**

21.0%

Module efficiency up to 21.0%

Features


- Innovative Layout**
 Innovative back contact module layout with asymmetric design for higher efficiency power
- High Reliability**
 Conductive back sheet's 2D encapsulation avoids welding stress and micro crack, resulting lower degradation under multiple harsh testing conditions
- Aesthetic Design**
 The design of busbar and tapping ribbon free makes module more aesthetic
- High Efficiency**
 Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions
- High ROI**
 Single-glass modules with global 30-year performance warranty bring higher return on investment
- Lead Free**
 Eco-friendly PV design achieves lead-free MWT module without soldering materials

Reinsurance Coverage for 30 Years

15 year
Quality Warranty

30 year
Performance Warranty

Insured by PAIC and LLOYD'S
PING AN LLOYD'S

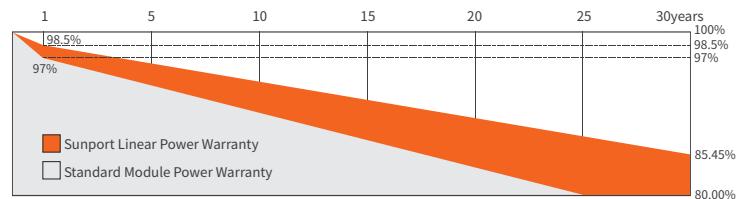

※1st year degradation less than 1.5%, 30 years linear power output 85.45% guaranteed.

Comprehensive Qualifications & Certifications

- ★CQC Top Runner Advanced Technology Certification (4A class)
- ★TUV NORD Certification
- ★ISO 9001:2015 Quality Management System
- ★ISO 14001:2015 Environment Management System
- ★ISO 45001: 2018 Occupation Health Safety Management System



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP445NHJH	SPP450NHJH	SPP455NHJH	SPP460NHJH	SPP465NHJH
Max-Power(Pm)	W	445	450	455	460	465
Power Tolerance	W			0~+5		
Max-Power Voltage(Vm)	V	43.6	43.8	44.0	44.2	44.4
Max-Power Current(I _m)	A	10.22	10.28	10.35	10.42	10.48
Open-Circuit Voltage(Voc)	V	52.7	52.9	53.1	53.3	53.5
Short-Circuit Current(I _{sc})	A	10.75	10.82	10.89	10.95	11.00
Module Efficiency(η _m)	%	20.1	20.3	20.5	20.8	21.0

STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25°C Power Tolerance ±3%

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP445NHJH	SPP450NHJH	SPP455NHJH	SPP460NHJH	SPP465NHJH
Max-Power(Pm)	W	334	338	342	346	350
Max-Power Voltage(Vm)	V	41.0	41.2	41.4	41.6	41.8
Max-Power Current(I _m)	A	8.15	8.21	8.27	8.32	8.38
Open-Circuit Voltage(Voc)	V	49.7	49.9	50.1	50.3	50.5
Short-Circuit Current(I _{sc})	A	8.70	8.75	8.80	8.85	8.90

NMOT: Irradiation 800W/m², Ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P _{max}	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of I _{sc}	0.06%/°C

Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HQ	682	31



Mechanical Characteristics

Dimension(L×W×H)	2005mmx1105mmx35mm
Weight	23.6kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	156(13x12) / Mono / Half-cell
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP68
Cable	4mm ² , 450mm (+)/ 150mm (-); Customizable
Connector	MC4 Compatible

Operating Conditions

Max System Voltage	DC1500V(TUV)
Max Fuse Rated Current	15A
Operating Temperature Range	-40°C~+85°C
Mechanical Load	5400Pa (front) /2400Pa (rear)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A

I-V Curve

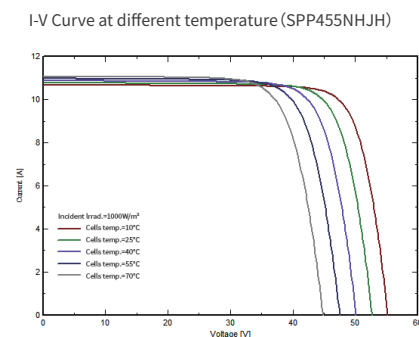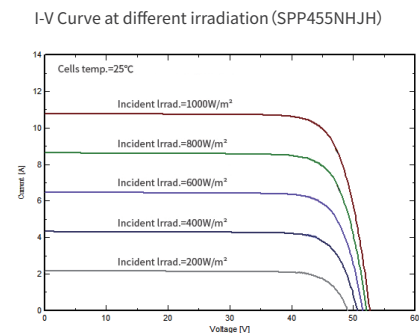

Module Size

