



Power range:
 from 310 to 340 Wp



Positive tolerance:
 from 0 to +4,99 Wp



Frame color range:
 RAL6009



Backsheet color range:
 Black



Glass color range:
 Green




Fire resistance:
 class of reaction to fire 1 (UNI 9177)



Warranty:
 12 year against manufacturing defects



Cell and color:
 5BB Monocrystalline

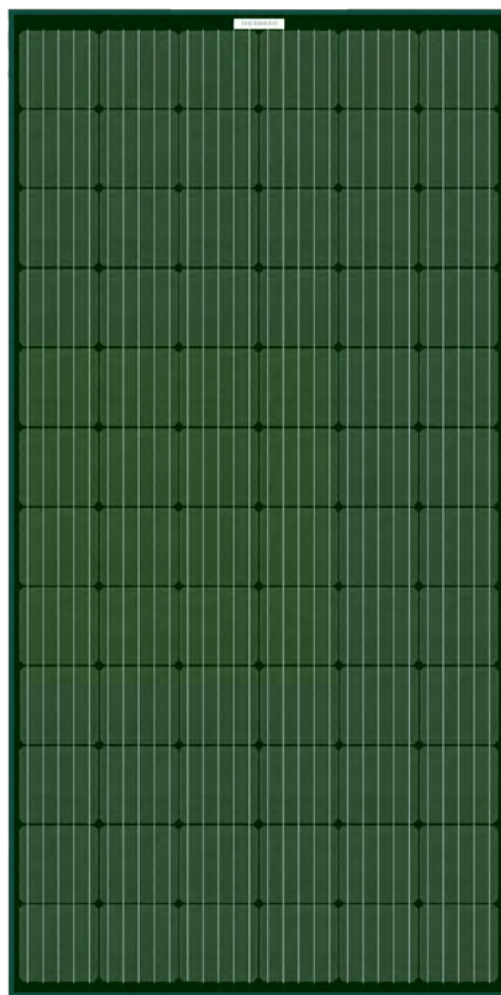

Specifications

- Use of tempered glass anti-glare with low iron content and high quality for optimum light collection.
- Anodised aluminium frame which provides solidity and sturdiness to withstand constant loads and climatic stresses such as snow and ice with applied pressure max 5,4kN/m²
- NOCT = 45°C
- Temperature range from -40°C a 85°C
- Mechanical load on surface max 550 kg/m²
- Hail impact resistance ø 25mm a 86 km/h

System certifications

- Corporate Quality Management EN ISO 9001:2008
- Environmental Management EN ISO 14001:2004
- Management of Health and Safety at the Workplace BS/OHSAS 18001:2007
- Certificates issued by TUV Rheinland ID:9105084080

Product certifications

- IEC 61215:2005
- EN 61730-1/-2:2007
- Class of reaction to fire I (UNI 9177)
- Anti-corrosion saline IEC 61701
- Anti-corrosion ammonia IEC 62716
- PID Free - Classe A
- Safety class II
- Factory Inspection
- Production "made in Italy"
- EC Directives: EMC 2004/108/EC; 2006/95/EC low Voltage

Measure VE372PVFG

| | |
|-------------------|-------------------------------|
| • Length | 1980 mm |
| • Width | 1000 mm |
| • Height | 40 mm |
| • Weight | 26,5 kg |
| • Frame | Anodized or painted aluminium |
| • Glass thickness | 4,0 mm |

Guarantees

- 12 year warranty against manufacturing defects*
- 25 year linear warranty to 82.5% of the maximum declared power*

*If used and installed according to technical and operational instructions. The Company reserves the right to make changes to product specifications. This data sheet corresponds to the requirements of Standard EN50380. Rel.4 03/2021

Behavior in standard test conditions STC*

| Power class (maximum value) | P_{max} | 310 Wp | 320 Wp | 330 Wp | 340 Wp |
|-----------------------------|-----------|---------|---------|---------|---------|
| Efficiency | η | 15,66 % | 16,16 % | 16,67 % | 17,18 % |
| Open-circuit voltage | V_{oc} | 44,29 V | 45,00 V | 45,69 V | 46,40 |
| Short-circuit current | I_{sc} | 8,98 A | 9,13 A | 9,42 A | 9,52 A |
| Maximum power voltage | V_{mp} | 36,97 V | 37,57 V | 37,51 V | 38,10 V |
| Current at maximum power | I_{mp} | 8,38 A | 8,52 A | 8,80 A | 8,93 A |

* Note - Powers about the photovoltaic module with black backsheet, under standard conditions: Irradiation 1000 W/mq - Module temperature = 25°C - Air mass AM 1,5
 Measurement tolerance solar simulator class A (- / + 2%) in accordance with IEC 60904-9

Materials used

| | |
|------------------|--------------------------------------|
| Cells per module | 72 |
| Cell type | 5BB Monocrystalline |
| Cell size | 158,75 mm x 158,75 mm |
| Front side | Anti-glare tempered glass (EN 12150) |
| Backsheet glass | Green |
| Backsheet color | Black |

Parameters for optimal integration into the system

| | |
|--------------------------------------|---------------------------|
| Maximum system voltage class II | 1000 V |
| Load capacity of reverse current | 15 A |
| High snow loads (standard IEC 61215) | max 5,4 kN/m ² |
| Number of bypass diodes | 3 |

Thermal characteristics

| | |
|--------------|-------------|
| NOCT** | 45 +/- 2°C |
| TC I_{sc} | 0,059 %/°C |
| TC U_{oc} | -0,322 %/°C |
| TC P_{mpp} | -0,34 %/°C |

**Note - Powers about the photovoltaic module with black backsheet, under NOCT conditions: Irradiation 800 W/mq - Module temperature = 45°C - Air mass AM 1,5

More Info

| | |
|-----------------------------|--|
| Sorting tolerance P_{max} | 0/+4,99 W |
| Type of protection (IP) | IP68 |
| Connector | MC4 |
| Cable | Solar cable 4mm ² - Length 1m |

