


MONO PERC -144 Cells

520 Wp | 525 Wp | 530 Wp | 535Wp | 540 Wp | 545 Wp

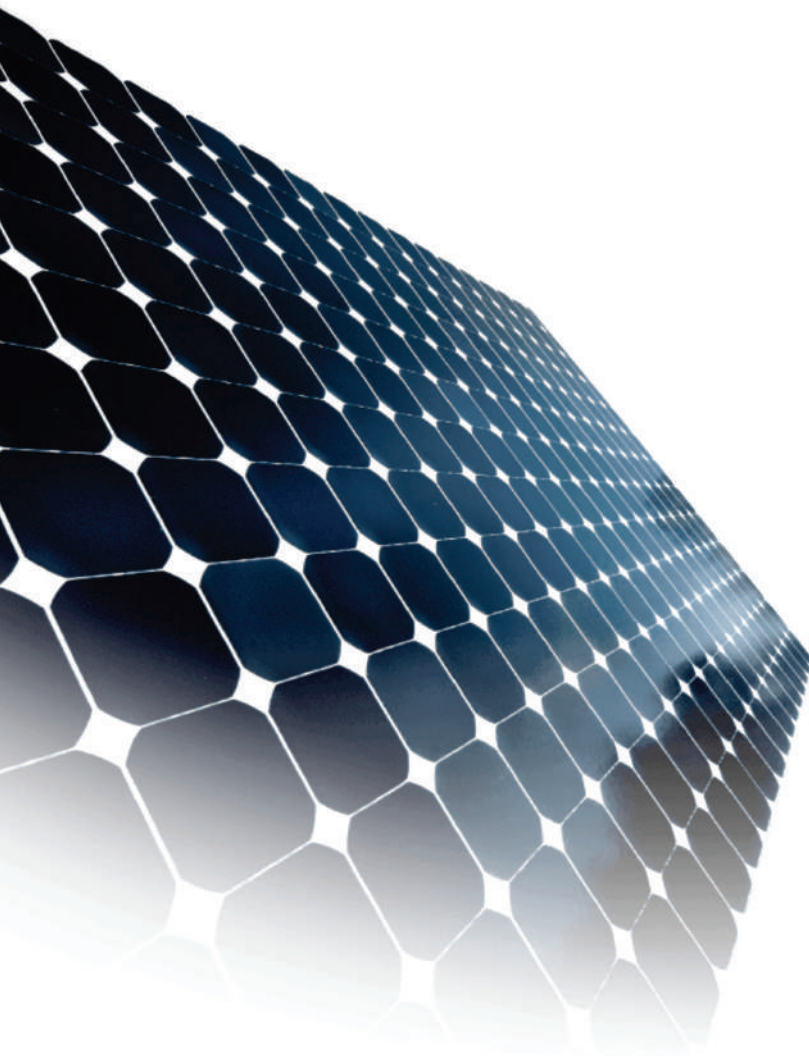

Key Features

- 
High Module Conversion Efficiency
 Module efficiency up to 21.0 % achieved through advanced cell technology and manufacturing process.
- 
Advanced Technology
 MBB- Multi Busbar (10BB) / Halfcut MONOPERC cells / Ga Doped Wafers
- 
Positive Tolerance Cell Output
 Guaranteed 0~+4.99 Wp positive tolerance to ensure power output
- 
Excellent Weak Light Performance
 Advanced glass and surface texturing allow for excellent performance in low-light environment.
- 
Extended Wind and Snow load Tests
 Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).
- 
Excellent PID Resistance
 Excellent Anti-PID performance guarantee limited power degradation and certified for up-to 288 Hrs.
- 
Withstanding Harsh Environment
 Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline, ammonia.
- 
Rigorous Testing Criteria
 100% EL inspection ensuring defect-free modules.
- 
Current Sorting
 To minimize the current mismatch losses to maximize system power output.

Linear Performance Warranty


Product Warranty 12 Years: Material & Processing.
 First year Degradation Upto -2.5 %
 Linear Power output 25 : 2-25 Annual degradation -0.55%


Certifications and standards

IEC 61215, IEC 61730, IEC 61701, UL 61730 *CEC,
 *CEC-Aus, IEC 62716, IEC 62759, IEC 62804,
 IEC 62782, IEC 60068-2-68, IEC 61853 ,IS 14286



*Certification are under progress

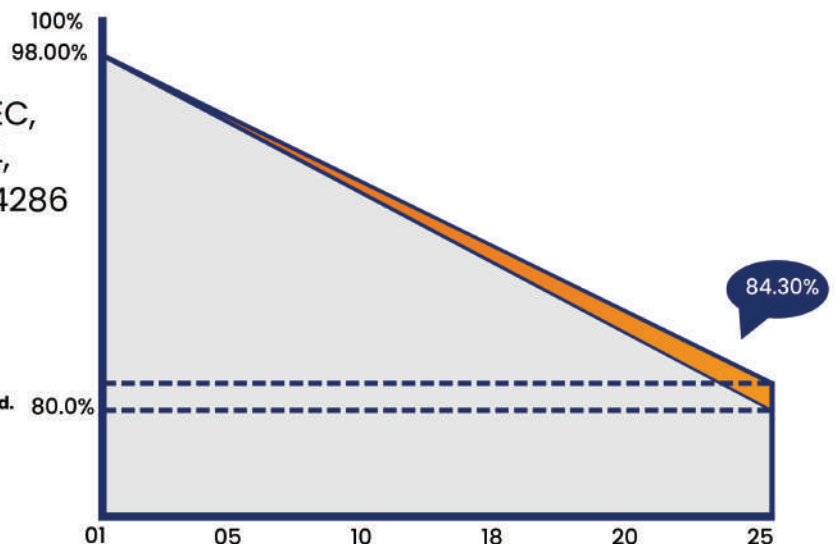

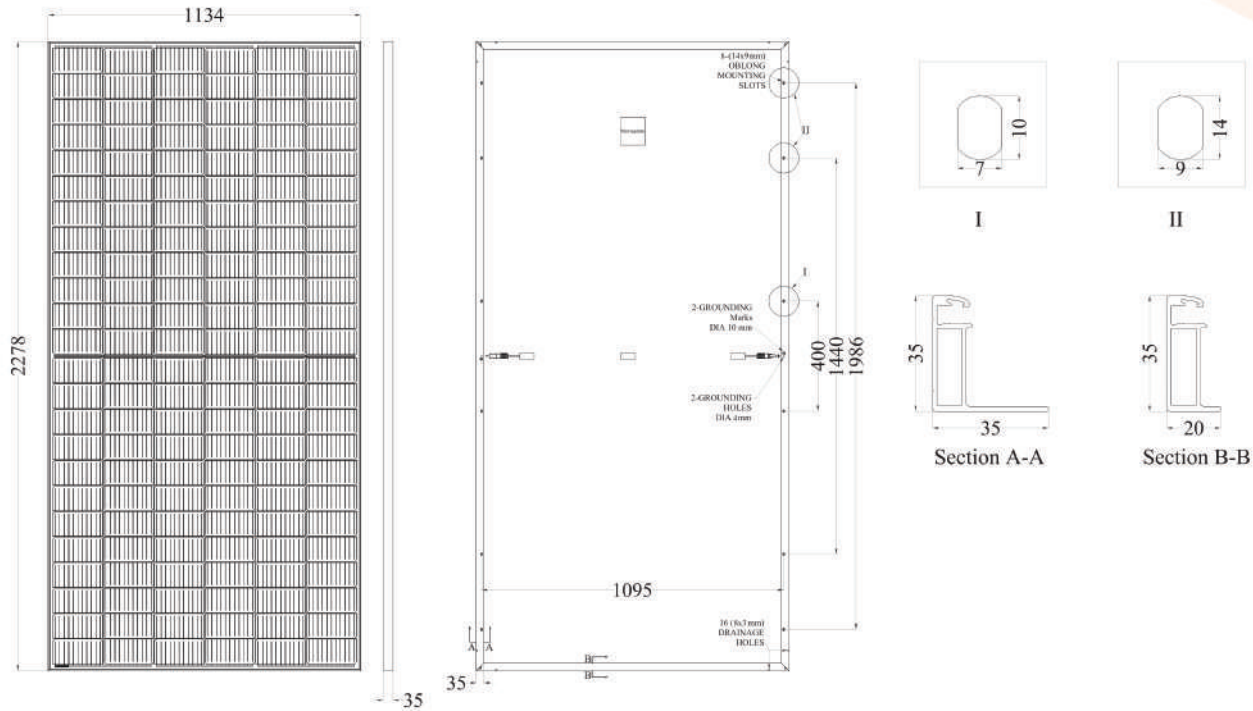

Electrical Data Performance

Conditions	Unit	STC		NOCT		STC		NOCT		STC		NOCT	
Peak Power Pmax(0 ~+ 4.99)Wp	(Wp)	520	393.2	525	393.2	530	397.5	535	401.3	540	405.0	545	408.8
Maximum voltage, Vmpp	(V)	41.14	38.29	41.34	38.29	41.5	38.48	41.65	38.68	41.8	38.79	42.08	38.8
Maximum current, Impp	(A)	12.66	10.27	12.71	10.27	12.78	10.33	12.86	10.39	12.94	10.46	13.01	10.46
Open circuit voltage, Voc	(V)	49.38	45.64	49.60	45.94	49.80	46.17	49.98	46.41	50.16	46.54	50.49	46.56
Short circuit current, Isc	(A)	13.29	10.78	13.35	10.78	13.42	10.85	13.50	10.91	13.59	10.98	13.63	11.03
Module Efficiency(%)	(%)	20.13		20.32		20.52		20.70		20.90		21.10	
Operating Temperature(C)		40°C~+85°C											
Maximum system voltage		1500 VDC											
Maximum series fuse rating		25A											
Power tolerance		0~+3%											
Temperature coefficients of Pmax		-0.34%/°C											
Temperature coefficients of Voc		-0.28%/°C											
Temperature coefficients of Isc		0.048%/°C											
Nominal operating cell temperature (NOCT)		45 ± 2 °C											
Fire Safety		Class-C											
Application		Class-A											
Safety Class		Class II											

STC: Irradiance 1000 W/m² module temperature 25° C, Am=1.5; NOCT: Irradiance 800 W/m², ambient temperature 20°C, Am=1.5, Wind speed 1m/s. Average power reduction of 4.5% at 200 W/m² as per IEC 60904-1. Measuring Uncertainty +/- 3%

MODULE MECHANICAL DATA

SPECIFICATION DATA

Cell Type	Half Cut- PERC Monocrystalline, 144 Cells
Dimensions	2278X1134X35mm
Weight	28 kgs
Front Cover	3.2 mm Tempered Glass
Backsheet	Composite Film
Frame Material	Silver Anodized Aluminium Profile, (black frame on request)
J-Box	IP 68, 3 diodes Split JB
Cable	350mm, 4mm ²
Connectors	MC4 Compatible Connector IEC/UL Certified
Standard Packaging	30 Pieces/Pallet
Module Pieces per Container	600 pieces (40* HQ)

I-V Characteristics At Different Irradiations

